

Project		Catalog #		Type	
Prepared by		Notes		Date	



McGraw-Edison

Impact Elite LED

Wall Mount Luminaire

Product Features



Product Certifications



Interactive Menu

- Ordering Information [page 2](#)
- Product Specifications [page 2](#)
- Energy and Performance Data [page 3](#)
- Control Options [page 4](#)

Quick Facts


- 15 Optical Distributions
- Lumen packages range from 2,459 to 11,480 (20W - 95W)
- Efficacy up to 149 lumens per watt

Connected Systems


- WaveLinx PRO Wireless
- WaveLinx LITE Wireless

Dimensional Details


Cylinder

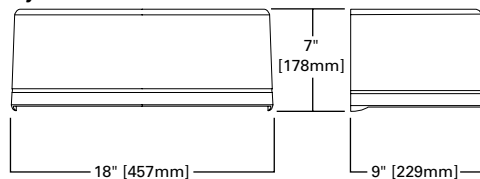


Quarter Sphere

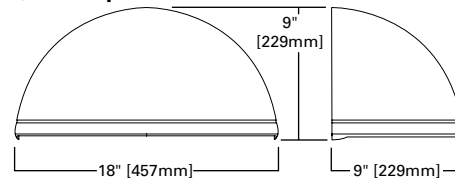


Hook - n - Lock

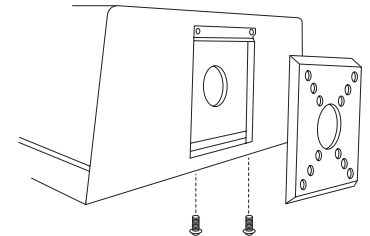

Trapezoid

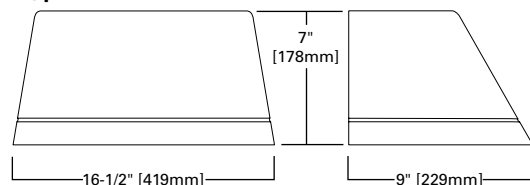

Wedge

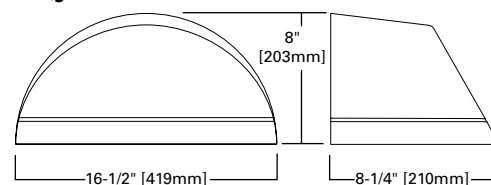

NOTES:


1. IDA Certified for 3000K CCT and warmer only.

Ordering Information

SAMPLE NUMBER: ISC-SAIF-740-U-T3-BZ

Product Family ¹	Light Engine		Color Temperature	Voltage	Distribution	Finish
	Configuration	Drive Current				
ISC=Impact Elite LED Small Cylinder ISS=Impact Elite LED Small Quarter Sphere IST=Impact Elite LED Small Trapezoid ISW=Impact Elite LED Small Wedge BAA-ISC=Impact Elite LED Small Cylinder Buy American Act Compliant ²² TAA-ISC=Impact Elite LED Small Cylinder Trade Agreements Act Compliant ²² BABA-ISC=Impact Elite LED Small Cylinder Built America Buy America ²⁷ BAA-ISS=Impact Elite LED Small Quarter Sphere Buy American Act Compliant ²² TAA-ISS=Impact Elite LED Small Quarter Sphere Trade Agreements Act Compliant ²² BABA-ISS=Impact Elite LED Small Quarter Sphere Build America Buy America ²⁷ BAA-IST=Impact Elite LED Small Trapezoid Buy American Act Compliant ²² TAA-IST=Impact Elite LED Small Trapezoid Trade Agreements Act Compliant ²² BABA-IST=Impact Elite LED Small Trapezoid Build America Buy America ²⁷ BAA-ISW=Impact Elite LED Small Wedge Buy American Act Compliant ²² TAA-ISW=Impact Elite LED Small Wedge Trade Agreements Act Compliant ²² BABA-ISW=Impact Elite LED Small Wedge Build America Buy America ²⁷	SA1=1 Square (16 LED) PA1=1 Panel (24 LED) ²⁴	A=350mA B=450mA C=600mA D=800mA E=1000mA ² F=1200mA ²	722=70CRI, 2200K 727=70CRI, 2700K 730=70CRI, 3000K 735=70CRI, 3500K 740=70CRI, 4000K 750=70CRI, 5000K 760=70CRI, 6000K 827=80CRI, 2700K 830=80CRI, 3000K AMB=Amber, 590nm ^{3,4}	U=120-277V 1=120V 2=208V 3=240V 4=277V 8=480V ⁵ 9=347V	SA1 Optics T2=Type II T3=Type III T4FT=Type IV Forward Throw T4W=Type IV Wide SL2=Type II w/Spill Control SL3=Type III w/Spill Control SL4=Type IV w/Spill Control SLL=90° Spill Light Eliminator Left SLR=90° Spill Light Eliminator Right RW=Rectangular Wide Type I PA1 Optics 5WQ=Type V Square Wide T2R=Type II T2U=Type II Urban T3=Type III T4W=Type IV Wide	AP=Grey BZ=Bronze BK=Black DP=Dark Platinum GM=Graphite Metallic WH=White RALXX=Custom Color ²⁶
Options (Add as Suffix)	Controls and Systems Options (Add as Suffix)		Accessories (Order Separately) ²³			
X=Driver Surge Protection (6kV) Only ¹⁶ 20K=Series 20kV UL 1449 Surge Protective Device CBP=Battery Pack with Back Box, Cold Weather Rated ^{13,14} CBP-CEC=Battery Pack with Back Box, Cold Weather Rated, CEC compliant ¹³ HSS=Factory Installed House Side Shield ¹⁵ ULG=Uplight Glow ^{4,7,24} LCF=Light Square Trim Plate Painted to Match Housing ²⁷ TR=Tamper Resistant Hardware CC=Coastal Construction ²⁰ HA=50°C High Ambient ⁸ AHD145=After Hours Dim, 5 Hours, 50% ⁹ AHD245=After Hours Dim, 6 Hours, 50% ⁹ AHD255=After Hours Dim, 7 Hours, 50% ⁹ AHD355=After Hours Dim, 8 Hours, 50% ⁹	BPC=Button Type Photocontrol (120, 208, 240 or 277V. Must Specify Voltage) PR7=NEMA 7-PIN Twistlock Photocontrol Receptacle ^{5,6,7} SPB1=Dimming Occupancy Sensor with Bluetooth Interface, <8" Mounting ^{12,21} SPB2=Dimming Occupancy Sensor with Bluetooth Interface, 8"-20" Mounting ^{12,21} SPB4=Dimming Occupancy Sensor with Bluetooth Interface, 21"-40" Mounting ^{12,21} MS/DIM-LXX=Motion Sensor for Dimming Operation ^{7,10,11,12} WLS2XX=WaveLinx LITE, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 7" - 15" Mounting ^{7,17,19} WLS4XX=WaveLinx LITE, SR Driver, Dimming Motion and Daylight, Bluetooth Programmable, 15" - 40" Mounting ^{7,17,19} WPS2XX=WaveLinx PRO, SR Driver, Dimming Motion and Daylight, WAC Programmable, 7" - 15" Mounting ^{7,17,19} WPS4XX=WaveLinx PRO, SR Driver, Dimming Motion and Daylight, WAC Programmable, 15" - 40" Mounting ^{7,17,19}		MA1253=10kV Circuit Module Replacement MA1254-XX=Thruway Back Box - Impact Elite Trapezoid MA1255-XX=Thruway Back Box - Impact Elite Cylinder MA1256-XX=Thruway Back Box - Impact Elite Quarter Sphere MA1257-XX=Thruway Back Box - Impact Elite Wedge FSIR-100=Wireless Configuration Tool for Occupancy Sensor WOLC-7P-10A=WaveLinx Outdoor Control Module (7-pin) ^{7,18}			
NOTES: 1. DesignLight Consortium® Qualified. Refer to www.designlights.org , Qualified Products List under Family Models for details. 2. Not available with ULG option. 3. Choose Drive Current "A" for Amber 590nm, which is provided at 500mA only. 4. Narrow-band 590nm +/- 5nm for wildlife and observatory use. Exact luminaire wattage available in IES files. Available with 5WQ, 5MQ, SL2, SL3 and SL4 distributions. Can be used with HSS option. 5. 480V not to be used with ungrounded or impedance grounded systems. 6. Not available with ISS or ISW. 7. Cannot be used in conjunction with other control options. 8. Suitable for 50°C provided no options other than motion sensor are included and driver output set to 1000mA or less. 9. Requires the use of photocontrol. Not available with 350mA drive current. See After Hours Dim supplemental guide for additional information. 10. Replace LX with L08 (<8" mounting), L20 (8"-20" mounting) or L40W (21"-40" mounting). 11. The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting Solutions for more information. 12. Includes integral photocell. 13. Battery pack operating temperature of -20C to +40C. Operates downlight for 90-minutes. 14. Must specify 120V or 277V. 15. Not for use with 5WQ, 5MQ, 5WQ or RW optics. A black trim plate is used when HSS is selected. 16. Removes additional surge module. 17. Replace XX with sensor color (WH, BZ, or BK). 18. For WaveLinx applications, WAC Gateway required to enable field-configurability. Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed. Gateway not required for WaveLinx Lite Commercial (LC) applications. 19. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. 20. Smart device with mobile application required to change system defaults. See controls section for details. 21. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to DOMESTIC PREFERENCES website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. 22. For BAA or TAA requirements, Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information. 23. Only available in 3000K, 4000K or 5000K CCT. 24. Not available with motion sensor controls, including SPB, MS/DIM or WaveLinx. 25. Specify RAL number for Custom Color. Custom color matching available upon request. Consult your lighting representative at Cooper Lighting Solutions for more information. 26. Not available with PA1 configuration. 27. Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the DOMESTIC PREFERENCES website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.						

Thruway Back Box

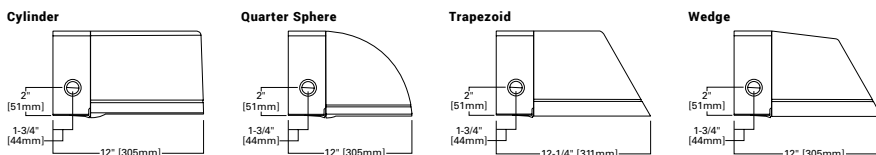

Product Specifications

Construction

- Heavy-wall, die-cast aluminum housing and removable hinged door frame
- Optional tamper-resistant fasteners offer vandal resistant access
- Vandal resistant with IK10 impact rated housing and optic

Optics

- High-efficiency injection-molded AccuLED optics technology
- 15 optical distributions

Electrical

- Standard with 0-10V dimming
- Standard with Cooper Lighting Solutions proprietary circuit module designed to withstand 10kV of transient line surge
- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration

- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration.

Mounting

- Utilizes "Hook-N-Lock" mounting mechanism, securing to a gasketed and zinc plated mounting attachment
- Two black oxide coated Allen set screws concealed but accessible from below

Finish

- Super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness
- RAL and custom color matches available
- Coastal Construction (CC) option available

Compliance

- IDA Certified for 3000K CCT and warmer only
- FHWA and FTA agencies are utilizing their BAA rules for BABA compliance. Only product

- configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Buy America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Buy America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards
- Please refer to the [DOMESTIC PREFERENCES](http://www.cooperlighting.com/domestic-preferences) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Energy and Performance Data

 View Impact Elite IES files

1 Light Square (SA)		Cylinder (ISC) and Quarter Sphere (ISS)						Trapezoid (IST) and Wedge (ISW)					
Drive Current (mA)		350	450	600	800	1000	1200	350	450	600	800	1000	1200
Power (Watts)	120 - 277V	20.1	25.4	34.2	45.2	58.2	66.0	20.1	25.4	34.2	45.2	58.2	66.0
Current (A)	120	0.17	0.22	0.29	0.38	0.48	0.56	0.17	0.22	0.29	0.38	0.48	0.56
	277V	0.09	0.10	0.13	0.17	0.21	0.25	0.09	0.10	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V	23.3	28.7	36.6	49.5	60.7	70.1	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V	0.07	0.08	0.11	0.15	0.18	0.21	0.07	0.08	0.11	0.15	0.18	0.21
	480V	0.05	0.06	0.08	0.11	0.13	0.16	0.05	0.06	0.08	0.11	0.13	0.16
Optics (4000K, 70 CRI)													
T2	Lumens	2,802	3,500	4,618	5,778	7,231	7,895	2,772	3,475	4,576	5,733	7,175	7,834
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	139	138	135	128	124	120	138	137	134	127	123	119
T3	Lumens	2,778	3,470	4,578	5,729	7,169	7,827	2,731	3,424	4,508	5,648	7,069	7,718
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	138	137	134	127	123	119	136	135	132	125	121	117
T4FT	Lumens	2,751	3,436	4,534	5,673	7,099	7,751	2,762	3,462	4,559	5,712	7,149	7,805
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	137	135	133	126	122	117	137	136	133	126	123	118
T4W	Lumens	2,780	3,473	4,582	5,733	7,174	7,833	2,739	3,434	4,522	5,665	7,089	7,740
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	138	137	134	127	123	119	136	135	132	125	122	117
SL2	Lumens	2,763	3,451	4,554	5,698	7,130	7,785	2,730	3,422	4,507	5,646	7,066	7,715
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	Lumens Per Watt	137	136	133	126	123	118	136	135	132	125	121	117
SL3	Lumens	2,745	3,429	4,524	5,660	7,084	7,734	2,709	3,396	4,472	5,603	7,012	7,655
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	137	135	132	125	122	117	135	134	131	124	120	116
SL4	Lumens	2,680	3,348	4,417	5,526	6,916	7,551	2,666	3,342	4,401	5,514	6,900	7,534
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	133	132	129	122	119	114	133	132	129	122	119	114
SLL	Lumens	2,447	3,057	4,033	5,046	6,315	6,895	2,459	3,083	4,059	5,086	6,365	6,949
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	122	120	118	112	109	104	122	121	119	113	109	105
RW	Lumens	2,883	3,601	4,751	5,945	7,440	8,123	2,818	3,533	4,652	5,828	7,294	7,964
	BUG Rating	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1
	Lumens Per Watt	143	142	139	132	128	123	140	139	136	129	125	121

1 Light Panel (PA)		Cylinder (ISC) and Quarter Sphere (ISS)						Trapezoid (IST) and Wedge (ISW)					
Drive Current (mA)		350	450	600	800	1000	1200	350	450	600	800	1000	1200
Power (Watts)	120 - 277V	28.9	36.4	48.9	63.0	82.4	94.4	28.9	36.4	48.9	63.0	82.4	94.4
Current (A)	120V	0.24	0.31	0.41	0.53	0.69	0.79	0.24	0.31	0.41	0.53	0.69	0.79
	277V	0.11	0.14	0.18	0.23	0.30	0.34	0.11	0.14	0.18	0.23	0.30	0.34
Power (Watts)	347V or 480V	30.5	37.7	49.0	63.9	83.2	95.0	30.5	37.7	49.0	63.9	83.2	95.0
Current (A)	347V OR 480V	0.09	0.11	0.14	0.19	0.24	0.28	0.09	0.11	0.14	0.19	0.24	0.28
	480V	0.07	0.08	0.11	0.14	0.18	0.20	0.07	0.08	0.11	0.14	0.18	0.20
Optics (4000K, 70 CRI)													
T2R	Lumens	4,296	5,369	7,010	8,733	10,721	11,750	4,154	5,211	6,738	8,386	10,329	11,338
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2
	Lumens Per Watt	149	147	143	139	130	124	144	143	138	133	125	120
T2U	Lumens	4,241	5,300	6,920	8,621	10,584	11,600	4,123	5,172	6,688	8,323	10,252	11,253
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3
	Lumens Per Watt	147	146	142	137	128	123	143	142	137	132	124	119
T3	Lumens	4,193	5,240	6,842	8,524	10,464	11,468	4,079	5,117	6,616	8,235	10,143	11,133
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G3	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G2	B2-U0-G3	B2-U0-G3
	Lumens Per Watt	145	144	140	135	127	121	141	141	135	131	123	118
T4W	Lumens	4,165	5,205	6,796	8,467	10,394	11,392	4,083	5,122	6,623	8,243	10,152	11,144
	BUG Rating	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B2-U0-G3	B1-U0-G2	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B2-U0-G3
	Lumens Per Watt	144	143	139	134	126	121	141	141	135	131	123	118
5WQ	Lumens	4,255	5,318	6,943	8,650	10,619	11,638	4,206	5,276	6,822	8,491	10,458	11,480
	BUG Rating	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G3	B4-U0-G3	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G2	B4-U0-G3
	Lumens per Watt	147	146	142	137	129	123	146	145	140	135	127	122

Lumen Maintenance (TM-21)

Drive Current	Ambient Temperature	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 hours**
Up to 1A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.7%	98.3%	98.1%	97.4%	> 1.9M
	50°C	98.2%	97.2%	96.8%	95.2%	> 851,000
1.2A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.5%	97.9%	97.7%	96.7%	> 1.3M

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
10°C	1.02
15°C	1.01
25°C	1.00
40°C	0.99

* Supported by IES TM-21 standards

** Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, explaining proper use of IES TM-21 and LM-80.

Control Options

0-10V

This fixture is offered standard with 0-10V dimming driver(s).

Photocontrol (BPC and PR7)




Optional button-type photocontrol provides a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels.

After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a "dusk-to-dawn" period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

Dimming Occupancy Sensor (SPB, MS/DIM-LXX)



These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

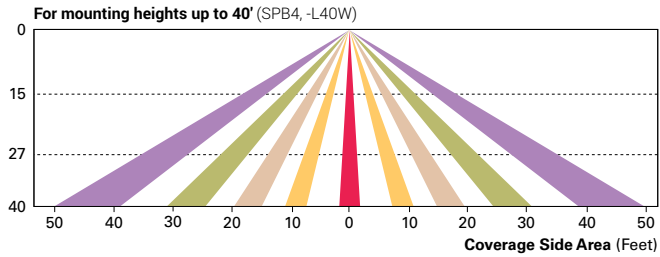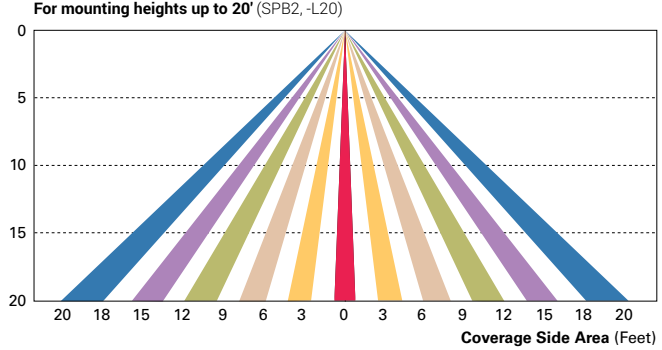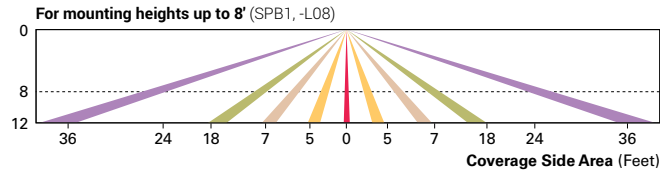

WaveLinX Wireless Control and Monitoring System

Operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. WaveLinX Pro (WPS2 to WPS4) outdoor wireless sensors offer passive infrared (PIR) occupancy and photocell for closed loop daylight harvesting, and can be factory or field-installed. Sensors are factory preset to dim down to 50% after 15 minutes of no motion detected. Two lens options are available for mounting heights of 7' to 40'. Use the WaveLinX mobile application for set-up and configuration. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets). WaveLinX Lite (WLS4 and WLS2) outdoor wireless sensors provide PIR occupancy and photocell for closed loop daylight harvesting, and can be factory or field-installed. Sensors are factory preset to dim down to 50% after 15 minutes of no motion detected. Two lens options are available for mounting heights of 7' to 40'. Use the WaveLinX Lite mobile application for set-up and configuration. WAC not required. WaveLinX Outdoor Control Module (WOLC-7P-10A) accessory provides a photocontrol enabling astronomic or time-based schedules to provide ON, OFF and dimming control of fixtures utilizing a 7-PIN receptacle. The out-of-box functionality is ON at dusk and OFF at dawn.

For mounting heights up to 15' (WPS2 and WLS2)

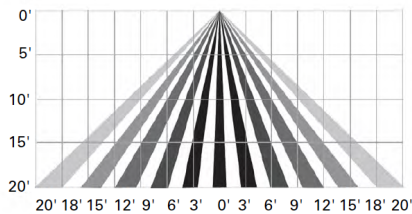

For mounting heights up to 40' (WPS4 and WLS4)

