


<b>Project</b>		<b>Catalog #</b>		<b>Type</b>	
<b>Prepared by</b>		<b>Notes</b>		<b>Date</b>	

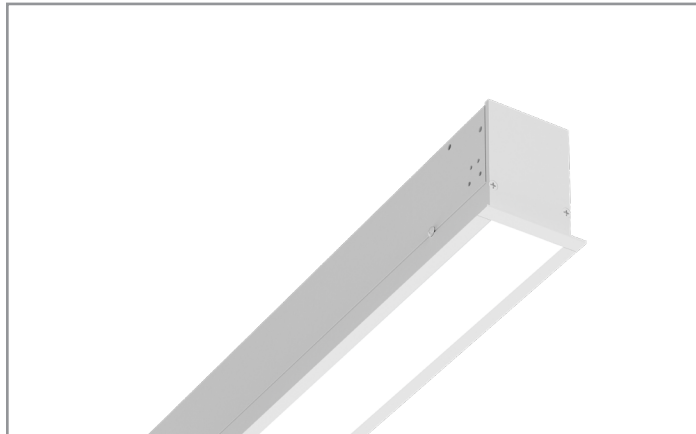

# Neoray

## Define | Recessed | 3in

Direct Only

### Typical Applications

Education • Healthcare • Hospitality • Office • Retail • Transit

### Interactive Menu


- Order Information page 2
- Photometric Data page 7
- Energy and Performance Data page 8
- Control Solutions page 12
- Product Limited Warranty



### Top Product Features

- Define Recessed family available in 2in, 3in, 4in, and 5in
- Multiple Optic options
- Continuously illuminated straight runs, corners, intersections, and patterns
- Wired and wireless controls
- VividTune and BioUp Technology

### Dimensions

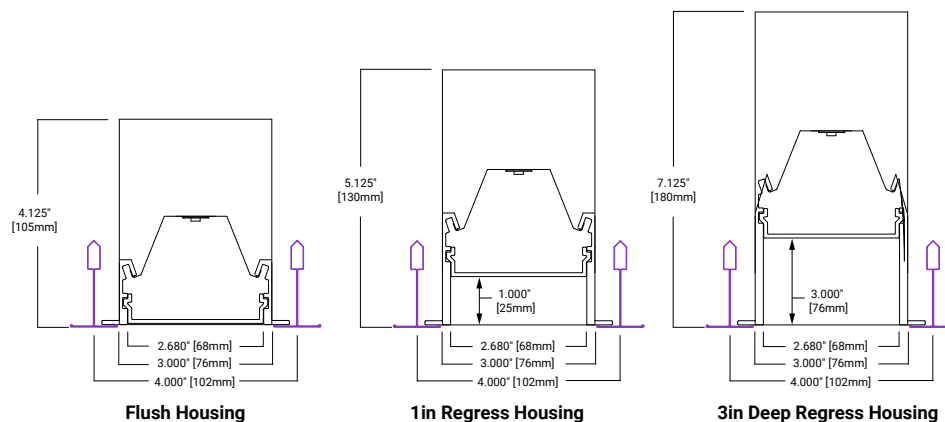

Order Information

Icon Key: Grey bar denotes available with 10-Day Quick Spec

SAMPLE ORDER NUMBER: S123DR-S500D935-FES24F0-1-UDD-F-BM-P

Domestic Preference‡	Delivery	Body			Output
		Series	Optic Compatibility	Direction & Location	Performance
[Blank] = Standard BAA = Buy American Act‡ BABA = Build America Buy American Act‡	[Blank] = None QS = QuickSpec	S123 = Define 3	[Blank] = Flush Housing R = 1in Regress Housing R3 = 3in Deep Regress Housing <i>Coming Soon!</i>	DR = Direct Only Recessed	S = Standard H = High Performance V = VividTune B = BioUp
<b>Notes</b> ‡Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the <a href="#">DOMESTIC PREFERENCES</a> website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.	<b>Notes</b> Grey bar denotes option available with 10-Day QuickSpec	<b>Notes</b>	<b>Notes</b> Use 1in Regress compatible body for 1in Regress optic with Frosted Lens (F) and Louvers (VL) only. Use 3in Deep Regress compatible body for 3in Regress optic with Frosted Lens (F) only.	<b>Notes</b>	

Output (Cont'd)				Mounting	Pattern Length	
Direct Output	CRI	CCT		Ceiling Type	Length	Max Section Length
340D = 340 Lm/ft Direct 560D = 560 Lm/ft Direct 775D = 775 Lm/ft Direct 1000D = 1000 Lm/ft Direct 1165D = 1165 Lm/ft Direct _D = Custom Lm/ft Direct	8 = 80 CRI 9 = 90 CRI B = BioUp	<b>Static</b> 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K	<b>VividTune</b> 2765 = 2600-6500K 3050 = 3000-5000K  <b>BioUp Dynamic</b> 2750 = 2700-5000K	<b>Grid Ceiling</b> ETG = 15/16in Flat T-Grid ETT = 15/16in Flat T-Grid with Tegular Tiles FTG = 9/16in Flat T-Grid FTT = 9/16in Flat T-Grid with Tegular Tiles STG = 9/16in Slotted Dimensional T-Grid ITG = 9/16in Interlude Dimensional T-Grid  <b>Hard Ceiling</b> GYP = Visible Flange FSR = Flangeless (Mud-in)  <b>Other Ceiling Systems</b> FES = Finished Extruded Side (Wood Slat, Wood Panel, Fabric, Metal, etc)	2F0 = 2ft 3F0 = 3ft 4F0 = 4ft 5F0 = 5ft 6F0 = 6ft 7F0 = 7ft 8F0 = 8ft 9F0 = 9ft 10F0 = 10ft 11F0 = 11ft 12F0 = 12ft _F_ = Specify Length	[Blank] = Standard /8 = 8ft Max Section Length
<b>Notes</b> Specify Lumen Output to the nearest 10Lm/ft: Min = 340Lm/ft   Max = 1,165Lm/ft  Performance is based on 3500K 80CRI with Flush Frosted Lens and White housing. Reference Lumen Adjustment Factors table for more detail.  Reference BioUp (B) section for output availability.	<b>Notes</b> VividTune (V) available with 90CRI 2600-6500K (92765) and 3000-5000K (93050) only.  BioUp Static available with 3500K (B35), 4000K (B40), and 5000K (B50) only.  BioUp Dynamic available with 2700-5000K (B2750) only.  Reference BioUp (B) section for correlated CRI values.			<b>Notes</b>	<b>Notes</b> Specify individual luminaire, linear run, or total custom pattern lengths in xft/xin increments (ex. 37F10 = 37ft 10in). Please include the angle for each illuminated corner and intersection when providing sketch/drawing (ex. A045 = 45°).  Min fixture length is 2ft. Nominal lengths. Reference drawings for total length (including end caps and flanges).  Reference BioUp section for minimum length available with BioUp (B).	<b>Notes</b> Use [Blank] to allow for up to 12ft individual luminaires.  Use 8ft Max Section Length (/8) to limit max individual, run, and pattern section lengths to 8ft.

Electrical Wiring		Electrical		Optics
Circuiting	Emergency Options	Voltage	Wired Controls	Direct Optics
1 = Single Circuit S = Secondary Circuit	[Blank] = None E = Emergency Circuit B1 = 7W External Battery B2 = 14W 7W External Battery B3 = 6W External Battery T = UL924 Bypass Relay Device	U = Universal (120V-277V) 1 = 120V 2 = 277V 3 = 347V	DD = Standard 0-10V (1%-100%)  <b>Other</b> 5L = Fifth Light DALI (5%-100%) LH = Lutron EcoSystem DALI (1%-100%)  <b>For use with VividTune</b> W2A = 2-Channel 0-10V  <b>For use with Dynamic BioUp</b> W2A = 2-Channel 0-10V W2D = 2-Channel DALI	[Blank] = N/A F = Frosted Lens (Diffuse) D = Frosted 1in Drop Lens (Diffuse) A = Asymmetric G = Wall Graze WVL = White Louver w/ Frosted Lens SVL = Silver Louver w/ Frosted Lens BVL = Black Louver w/ Frosted Lens
<b>Notes</b> Secondary Circuit (S) allows A/B switching within a run or Pattern (P).	<b>Notes</b> Battery and UL924 Bypass Relay Device are available with 120V-277V (U, 1, or 2) only.  Battery (B1 and B2) options available with 0-10V (DD or W2A) and single channel DALI (5L or LH) Controls options only.  Reference Emergency Options product specification notes and Battery Location tables for additional details.	<b>Notes</b> 347V (3) available with Standard 0-10V (DD) Controls option only	<b>Notes</b> Use Standard 0-10V (DD) for Static BioUp (B).  2-Channel 0-10V (W2A) available with VividTune (V) and Dynamic BioUp (B2750) only.  2-Channel DALI (W2D) available with Dynamic BioUp (B2750) only.  Fifth Light DALI (5L) available with 1% dimming upon request.*	<b>Notes</b> Use [Blank] with Indirect Only Luminaire  Louvers (VL) available with 1in Regress (R) compatible housing in 1ft increments only. Louvers (VL) available in <1ft increments and custom Pattern (P) by request.*  Asymmetric (A) and Wall Graze (G) available with VividTune upon request.*  Performance is based on 3500K 80CRI with Flush Frosted Lens and White housing. Reference Lumen Adjustment Factors table for more detail.

\*Note: Options listed as "available by request" require review and may impact pricing and leadtime.

Order Information

Icon Key: Grey bar denotes available with 10-Day Quick Spec

SAMPLE ORDER NUMBER: S123DR-S500D935-FES24F0-1-UDD-F-BM-P

Electrical Options	Options	Wireless Controls	Pattern Type	Special Options*
	Body Finish			
<p><b>[Blank]</b> = None <b>CP</b> = Chicago Plenum</p>	<p><b>W</b> = White <b>S</b> = Silver <b>B</b> = Black (Semi-Gloss) <b>BM</b> = Black (Matte)</p> <p><b>RR</b> = Real Red <b>OO</b> = Oasis Orange <b>YY</b> = Yippee Yellow <b>GG</b> = Gracious Green <b>CC</b> = Cyprus Cyan <b>TT</b> = Totally Turquoise <b>BB</b> = Biosphere Blue <b>PP</b> = Perfect Purple <b>VV</b> = Vacation Violet <b>MM</b> = Magic Magenta</p> <p><b>C</b> = Custom Color (RAL) <b>CM</b> = Custom Color (Match)</p>	<p><b>[Blank]</b> = None</p> <p><b>Wavelinx Wireless</b> <b>WPS</b> = WaveLinX PRO Integrated Sensor <b>WLS</b> = WaveLinX LITE Integrated Sensor <b>WPST</b> = WaveLinX PRO Tilemount Sensor <b>WLST</b> = WaveLinX LITE Tilemount Sensor</p>	<p><b>[Blank]</b> = Individual or Straight Run <b>P</b> = Pattern</p>	<p><b>[Blank]</b> = None <b>FC</b> = Field Cuttable End* <b>FE</b> = Field Extendable End* <b>SHRD</b> = Shallow Housing w/ Remote Driver* <b>MRI</b> = MRI Room w/ Remote Driver*</p>
<p><b>Notes</b></p> <p>Reference Battery Location tables for Chicago Plenum (CP) with Battery.</p>	<p><b>Notes</b></p> <p>Custom Colors (C and CM) are available by request.*</p> <p>Performance is based off White (W) and may vary with selected finish.</p>	<p><b>Notes</b></p> <p>WaveLinX is available with (DD) and Single Circuit (1) only.</p> <p>Integrated Sensors with Louvers, Regressed, or Drop lenses available by request.*</p> <p>Integrated Sensors combined with Emergency Circuit (E) require one UL924 Bypass Relay (T) per emergency fixture.</p>	<p><b>Notes</b></p> <p>Please include the angle for each illuminated corner and intersection when providing sketch/drawing (ex. A045 = 45°) for a custom Pattern (P).</p>	<p><b>Notes</b></p> <p><i>*All special options available by request.*</i></p> <p>Multiple Special Option Codes may be specified with a "-" to separate. (ex. XX-YY-ZZ)</p> <p>Field Cuttable End (FC) extends the end-of-run housing 4in beyond the requested length providing an unlit field cuttable section.</p> <p>Field Extendable End (FE) allows for extension of the end-of-run housing 4in beyond the requested length with an extendable rear housing cover.</p> <p>Shallow Housing with Remote Driver (SHRD) reduces the housing height by including a remote driver housing solution.</p> <p>MRI Room with Remote Driver (MRI) provides a non-ferrous housing solution and includes a remote driver housing solution.</p>

\*Note: Options listed as "available by request" require review and may impact pricing and leadtime.

## Product Specifications

### Domestic Preference‡

- ‡Only product configurations with these prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or the Build America Buy America Act (BABA). BABA is the minimum Government compliance requirement for the Build America Buy America standards which is part of the Infrastructure and Investment Jobs Act (IIJA). Individual Government Agencies may have more stringent compliance standards. Please refer to the [DOMESTIC PREFERENCES](#) website or consult the CLS Domestic Preferences team for more information. Components shipped separately may be separately analyzed under domestic preference requirements.

### Serviceability

- Snap-in lens allows easy access to optical cavity and light engine.
- Removable modular light engine tray with quick disconnect wire-harness for ease of installation and maintenance over the life of the luminaire

### Construction

- Precision cut housing trim extruded from 6063 aluminum with aluminum frame
- Flush, 1in Regress, and 3in Deep Regress Housing options available

### Individuals, Runs, Patterns

- Fully luminous individual luminaires, straight runs, or custom patterns
- Patterns constructed using precision mitered housing and lens components
- The frame is welded to ensure a precise and robust housing
- Specify individual luminaire, linear run, or total custom pattern lengths in xft/xin increments
- Minimum fixture length is 23in
- All lengths are nominal lengths and do not include end flanges; reference drawings for total lengths.
- Actual sizes are 1in shorter than nominal to account for easy on-center Grid Ceiling installation (ex. 4F0 for 47in length).
- Add 1in to overall fixture length for Hard Ceiling installation (ex. 4F1 for 48in length)
- 8ft Max Section Length used on straight runs and patterns; use 8ft Max Section Length to limit max individual, run, and pattern section lengths to 8ft

### Output

- Specify Custom Lumen Output to the nearest 10Lm/ft
- Available in Static 2700K, 3000K, 3500K, 4000K, 5000K
- CRI  $\geq 80$ CRI or  $\geq 90$ CRI
- Nominal performance is based on 3500K 80CRI with Flush Frosted Lens and White Housing; reference Lumen Adjustment Factors table for more detail.
- Extrapolated LED lifetime per TM-21:
  - Greater than L90 at 61,000 hrs
  - L70 exceeding 100,000 hrs
- Available in 120-277V, 347V
- VividTune Tunable White available in Dynamic 2600K-6500K or 3000K-5000K; reference VividTune section for additional details
- BioUp Melanopic Lighting available in Static 3500K, 4000K, 5000K or Dynamic 2700K-5000K
- BioUp CRI ranges from  $>80$ CRI to 96CRI
- Reference BioUp section for additional details including Melanopic Daylight Efficacy Ratio (MDER)

### Optics

- Patented solution provides consistent illumination with no pixelation at the ends of individual luminaires, straight runs, and patterns.
- Direct Optics
  - F (or FLL): Frosted lens (Diffuse) with Lambertian distribution
  - D: Frosted 1in Drop Lens with Wide Lambertian distribution
  - A: Frosted lens with Asymmetric distribution
  - G: Frosted lens with Wall Graze distribution to highlight textured walls
  - VL: Premium straight blade Louver with metal construction and Frosted lens. 1in regress with 1in spacing provides superior low glare 45° cutoff

### Emergency Options

- Battery operates entire downlight portion of individual luminaires  $< 7$ ft
- Battery operates 4ft sections of longer luminaires, runs, and patterns
- Reference Battery Location section for additional details
- UL924 Bypass Relay Device available as emergency generator transfer option
- Emergency Circuit combined with Integrated Sensors require one UL924 Bypass Relay per emergency fixture

### Integrated Controls

- 0-10V dimming to 1% standard
- Fifth Light DALI dimming to 5% standard; Fifth Light DALI dimming to 1% available by request\*
- Lutron EcoSystem DALI dimming to 1% standard
- Additional control types may be available by request\*
- Reference Sensor Placement section for default integrated sensor locations of individual luminaires and straight runs
- Please include preferred integrated sensor locations when providing sketch/drawing for a custom Pattern (P)

### Mounting

- Compatible with Multiple Grid Ceiling, Drywall Ceiling, and Other Ceiling Systems
- Reference Mounting section and installation instructions for additional details

### Finish

- Electrostatically applied polyester powder coat paint
- See Finish Options section for additional details
- RAL Colors and Custom Match Colors available by request\*

### Special Options\*

- \*All special options available by request\*
- \*Any options listed as 'available by request' require review and may impact pricing and leadtime
- Consult factory to request any options not listed
- Reference the Mods Collection for common special option requests


### Compliance

- UL listed for damp locations
- IC Rated for insulation contact (except where noted)
- RoHS
- Tested to IESNA LM-79 and LM-80
- Can be used for State of California Title 24 high efficacy luminaire
- DLC qualified options available


### Warranty

- Five year limited warranty
- [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)


Finish Options



W - White



S - Silver



B - Black  
Semi-Gloss



BM - Black  
Matte




RR - Real Red  
RAL 3020  
Gloss



OO - Oasis Orange  
RAL 2004  
Gloss



YY - Yippee Yellow  
RAL 1018  
Gloss




GG - Gracious Green  
RAL 6018  
Gloss



CC - Cyprus Cyan  
RAL 6027  
Gloss



TT - Totally Turquoise  
RAL 5018  
Gloss



BB - Bioshere Blue  
RAL 5017  
Gloss



PP - Perfect Purple  
RAL 4005  
Gloss



VV - Vacation Violet  
RAL 4008  
Gloss



MM - Magic Magenta  
RAL 4010  
Gloss


RAL Colors & Custom Match Colors available by request\*




Ceiling Type

Grid Ceiling

15/16 Tee (ETG)

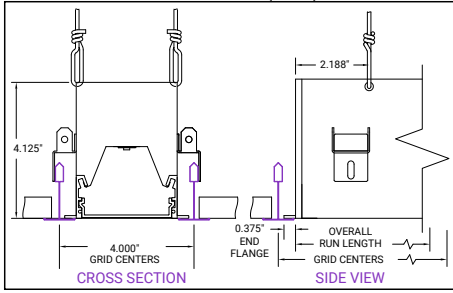

15/16 Tegular (ETT)

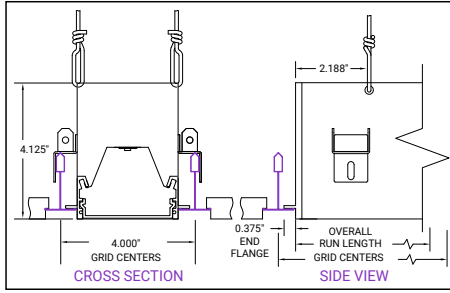


Note: All lengths are nominal lengths and do not include end flanges; reference submittal drawings for total lengths.


Add 1in to ordered overall fixture length for Hard Ceiling installation (ex. 4F1 for 48in length)

Actual lengths are 1in shorter than nominal to account for easy on-center Grid Ceiling installation (ex. 4F0 for 47in length).


9/16 Tee (FTG)

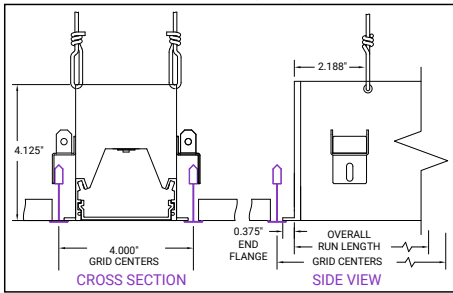


9/16 Tegular (FTT)

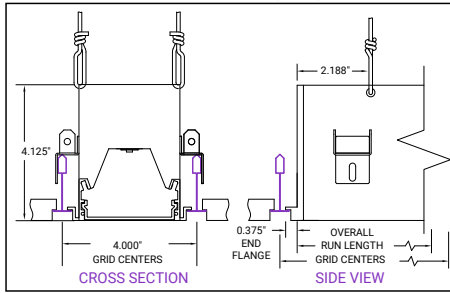

9/16 Slotted Tee (STG)

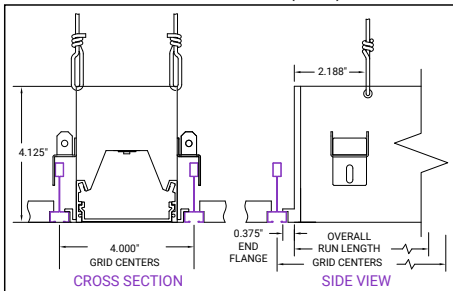


9/16 Interlude Tee (ITG)

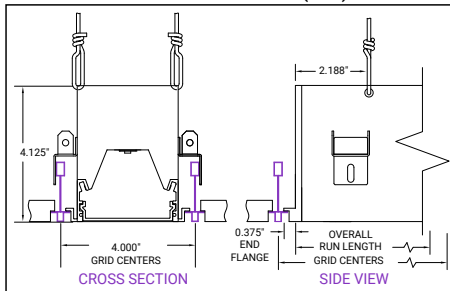


Hard Ceiling

Visible Flange (GYP)

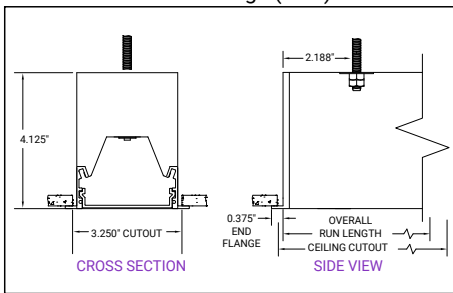


Mud-In Flange (FSR)

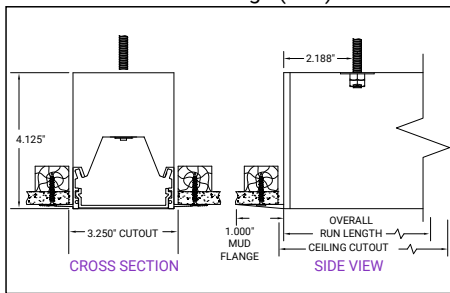


Other Ceiling Systems


Finished Extruded Side (FES)

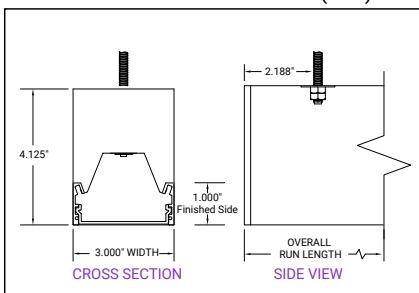

Typical Installations using Finished Extruded Side (FES)

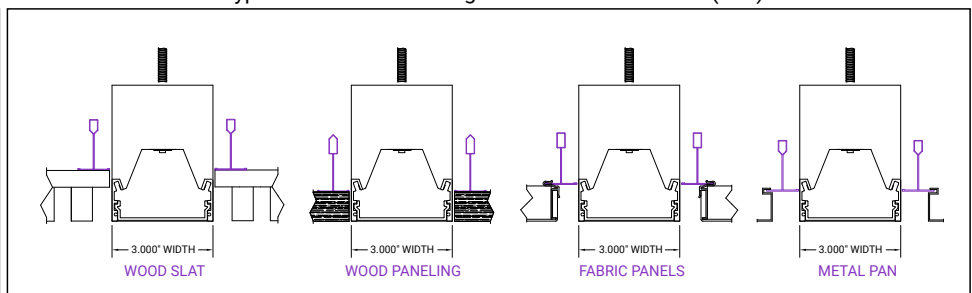


Photometric Data - Static White LED Technology

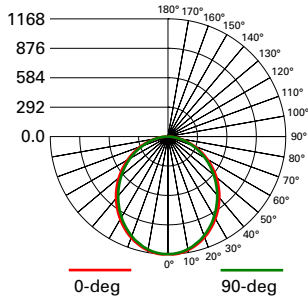



**FILE NAME:**  
S123DR-S775D835-GYP4F0-1-UDD-F-W  
**LUMENS:** 3027 Lms  
**LPW:** 114.7 LPW  
**CCT:** 3500K  
**WATTS:** 26.4 W  
**TEST NUMBER:** G3-1802-639-11

Flush Frosted Lens (F)

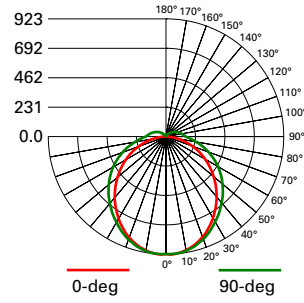



**FILE NAME:**  
S123DR-S775D835-GYP4F0-1-UDD-D-W  
**LUMENS:** 3085 Lms  
**LPW:** 116.9 LPW  
**CCT:** 3500K  
**WATTS:** 26.4 W  
**TEST NUMBER:** G3-1802-639-15

Frosted 1in Drop Lens (D)

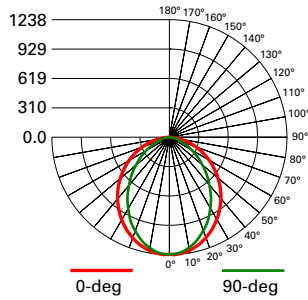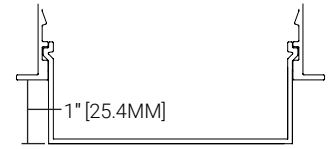


**FILE NAME:**  
S123RDR-S775D835-GYP4F0-1-UDD-F-W  
**LUMENS:** 2786 Lms  
**LPW:** 105.5 LPW  
**CCT:** 3500K  
**WATTS:** 26.4 W  
**TEST NUMBER:** G3-1802-639-25

1in Regress Frosted Lens (RD + F)

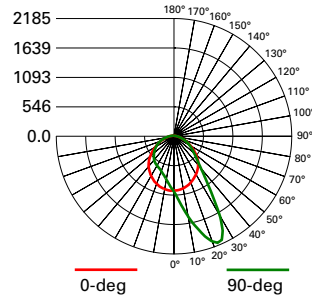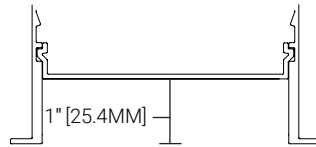


**FILE NAME:**  
S123DR-S775D835-GYP4F0-1-UDD-A-W  
**LUMENS:** 3115 Lms  
**LPW:** 118.0 LPW  
**CCT:** 3500K  
**WATTS:** 26.4 W  
**TEST NUMBER:** G3-1802-639-20

Flush Asymmetric (A)

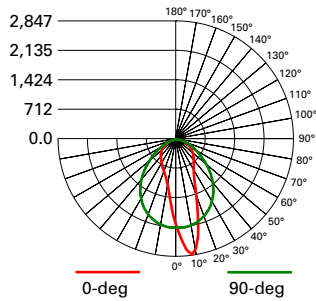


**FILE NAME:**  
S123DR-S775D835-X4F0-XX-UDD-G-W  
**LUMENS:** 3462.5 Lms  
**LPW:** 134.7 LPW  
**CCT:** 3500K  
**WATTS:** 25.7 W  
**TEST NUMBER:** P646650

Flush Wall Graze (G)

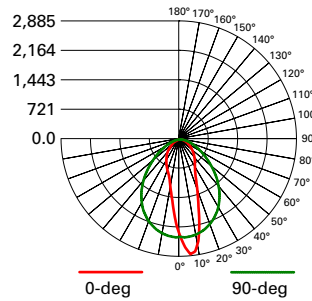

**FILE NAME:**  
S123RDR-S775D835-X4F0-XX-UDD-G-W  
**LUMENS:** 3231.3 Lms  
**LPW:** 124.3 LPW  
**CCT:** 3500K  
**WATTS:** 26 W  
**TEST NUMBER:** P646695

1in Regress Wall Graze (RD + G)

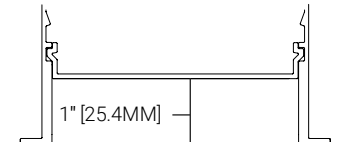

## Photometric Overview and Performance Data

### Direct Performance Per Linear Foot at 3500K/80CRI

Nominal Output	Standard		High Performance		VividTune	
	W/ft	lm/W	W/ft	lm/W	W/ft	lm/W
340	3.0	114	2.9	119	3.0	114
560	4.8	116	4.4	126	4.8	116
775	6.8	114	6.1	126	6.8	114
1000	8.9	111	8.1	123	8.9	111
1165	10.6	109	9.7	120	10.6	109

### Lumen Adjustment Factors

Body Finish	Direct Optics		CCT	80CRI	90CRI
	Direct Optics	Factor			
White (W)	Flush Frosted Lens (F)	1.000	2700K	N/A	0.792
	Asymmetric (A)	1.029	3000K	0.943	0.815
	Wall Graze (G)	1.119	3500K	1.000	0.861
	Drop (D)	1.019	4000K	1.010	0.892
	1in Regress Frosted (RD + F)	0.920	5000K	1.010	0.892
	White Louver w/ Frosted Lens (WVL)	0.645			
	Silver Louver w/ Frosted Lens (SVL)	0.341			
	Black Louver w/ Frosted Lens (BVL)	0.289			
Silver (S)	White Louver w/ Frosted Lens (WVL)	0.486			
	Silver Louver w/ Frosted Lens (SVL)	0.290			
	Black Louver w/ Frosted Lens (BVL)	0.248			
Black (B)	White Louver w/ Frosted Lens (WVL)	0.459			
	Silver Louver w/ Frosted Lens (SVL)	0.263			
	Black Louver w/ Frosted Lens (BVL)	0.224			



### Lumen Maintenance

Ambient Temperature	TM-21 Lumen Maintenance (60,000 hours) <sup>(1)</sup>	Theoretical L70 (Hours) <sup>(2)</sup>
25°C	>90%	>100,000

Notes: (1) Supported by IES TM-21 standards. (2) Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, that explains proper use of IES TM-21 and LM-80.

### Color Data (3500K)

		80CRI	90CRI
TM-30-15	R <sub>f</sub>	85.3	90.8
	R <sub>g</sub>	97.3	99.7
CRI/CIE	R <sub>a</sub>	85.2	94.8
	R <sub>s</sub>	17.2	70.7

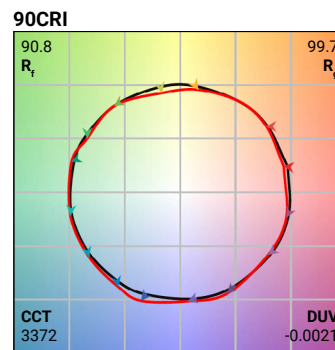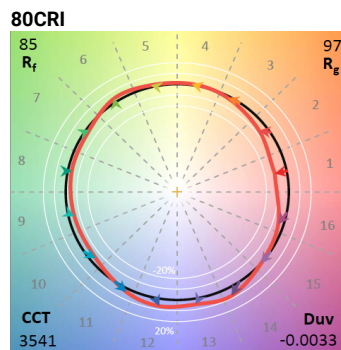

# Proven Research. Industry Recognized.

## BioUp Melanopic Lighting



See better




Feel better



Function better



See [BioUp brochure](#) for more details

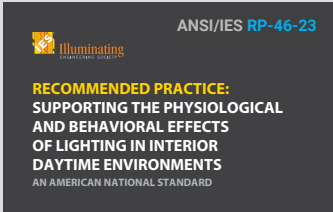


**ANSI/IES RP-46-23 / TM18 published March 2024 based on over 40 years of research.**


"...circadian clock synchronization is paramount to the body's efficient and appropriate functioning." – TM18



**BioUp solutions maximize WELL points for Circadian Lighting Design (L03):**

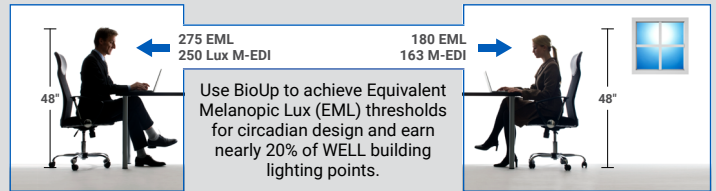


**MDER, M-EDI and EML** are key metrics used to quantify non-visual performance of indoor lighting systems.




See [BioUp white paper](#) for more details

**MDER** - Melanopic Daylight Efficacy Ratio (MDER) measures the amount of light stimulating to the melanopsin receptors.

**Standard 4000K LED**  
MDER = .62

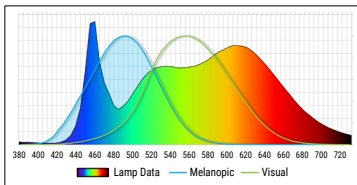

**BioUp 4000K LED**  
MDER = .82

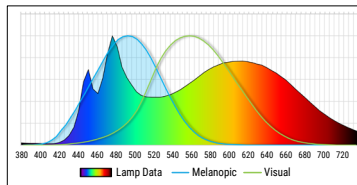

## 30% boost Biological impact compared to traditional LED sources


CCT	LED MDER ~83 CRI	BioUp Static		BioUp Dynamic	
		MDER	CRI	MDER	CRI
2700K	0.44	-	-	0.43	95
3000K	0.49	-	-	0.54	94
3500K	0.56	0.71	90	0.71	90
4000K	0.64	0.84	87	0.82	87
5000K	0.77	0.98	84	0.98	84

BioUp enhances the LED spectrum with cyan light at 475nm increasing the biological impact of the light to enhance our circadian rhythm which regulates our sleep/wake cycle, daytime engagement, and mood – **all without distorting visual color impression.**

### Static (non-tunable)

Static BioUp is used when simple Melanopic Lighting is desired at all times.

Arrow in graph shows BioUp spectrum boost is at 475nm where non-visual biological response is enhanced.

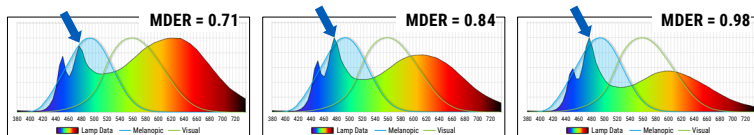

**3500K** or **4000K** or **5000K**


Cyan light component always present



no CCT control needed

### Dynamic - (Tunable)

Dynamic BioUp is used when Melanopic Lighting is desired to adjust during the day.

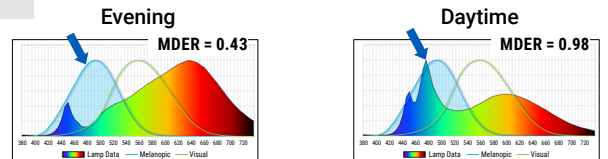

Warmer CCT Without Cyan content ← → Cooler Light With Cyan content

**2700K – 5000K**



Control with Wavelinx, 2ch 0-10V, or DALI

BioUp Photometry

Legend: • Available  
- Unavailable

3in	DIRECT	
Nominal Output	BioUp Light Engine	B35 efficacy
lm/ft	W/ft	lm/W
340	-	-
560	6.0	93.3
775	8.6	90.1
1000	11.5	87.0
1165	-	-

0-10V						
Availability						
Lumens/ft	340	560	775	1000	1165	
Fixture Length	4	-	•	•	•	-
	5	-	•	•	-	-
	6	-	•	•	•	-
	7	-	•	•	-	-
	8	-	•	•	•	-
	9	-	•	•	-	-
	10	-	•	•	•	-
	11	-	•	•	-	-
	12	-	•	•	•	-


DALI						
Availability						
Lumens/ft	340	560	775	1000	1165	
Fixture Length	4	-	•	•	•	-
	5	-	•	•	-	-
	6	-	•	•	•	-
	7	-	•	•	-	-
	8	-	•	•	•	-
	9	-	•	•	-	-
	10	-	•	•	•	-
	11	-	•	•	-	-
	12	-	•	•	•	-

# VividTune™

color tuning solutions

## Define with VividTune Tunable White

VividTune tunable white luminaires deliver high-quality light in a broad range of continuously variable color temperatures and intensities. Create a dynamic environment by adjusting the ambient light warmer or cooler to influence mood, support the task at hand, or create a dramatic ambience. The ability to control correlated color temperature and intensity separately using simple controls is the next evolution of LED lighting for the commercial, educational, healthcare and hospitality space. The unparalleled flexibility and number of available lighting environments enable users to find the right light with tunable white.

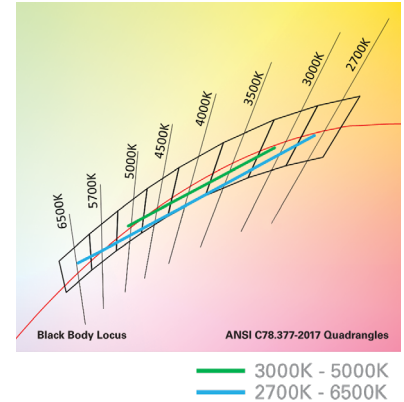


## Performance Data

Tunable White - Lumen Adjustment Factors				
CCT	3000K-5000K		2700K-6500K	
	80 CRI	90 CRI	80 CRI	90 CRI
2700K	-	-	0.868	0.741
3000K	0.894	0.736	0.893	0.771
3500K	0.946	0.804	0.924	0.809
4000K	0.993	0.868	0.944	0.835
4500K	1.002	0.883	0.961	0.857
5000K	1.002	0.883	0.974	0.874
6500K	-	-	0.988	0.897

## Controlling VividTune Tunable White

VividTune luminaires make tunable white more accessible by using simple and familiar controls. From wall dimmers to wireless controls, VividTune tunable white luminaires are compatible with industry standard 0-10V dimming controls. A single 0-10V dimming input is used to control intensity (brightness) while a second 0-10V dimming input is used to adjust CCT. For suggested control configurations, go to [www.cooperlightingsolutions.com](http://www.cooperlightingsolutions.com) for tunable white application guides.

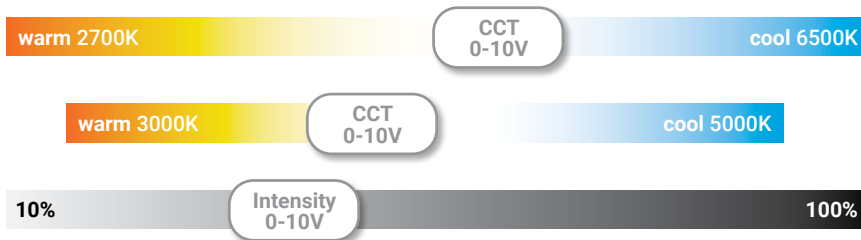

**Control Solutions**

- WaveLinx LITE wireless
- WaveLinx PRO wireless
- WaveLinx CAT wired
- WaveLinx Wired



Define with WaveLinx offers no-hassle lighting control with multiple luminaire level control solutions.




**WaveLinx PRO** is a wireless lighting control solution, for connected spaces, that significantly reduces a building's energy consumption. From a single floor to an entire campus, WaveLinx PRO connects more than lighting assets; it shares aggregated sensor data with the WaveLinx CORE platform and other building systems, so building owners can improve operations, spaces environment, and tenants' experience. WaveLinx PRO offers a rich portfolio of wireless devices, WaveLinx PRO-enabled luminaires, and an intuitive WaveLinx mobile app for office, education, warehouse, and parking garage applications.




**WaveLinx LITE** is a cost effective, wireless digital lighting control solution, with out-of-the-box functionality, that saves energy and meets code. It's designed for applications that require occupancy-based, daylighting, or manual light control. Customize installations for office, education, warehouse and parking garages using the secure, simple mobile app.

**Integrated Sensor Coverage Pattern**


TOP VIEW:

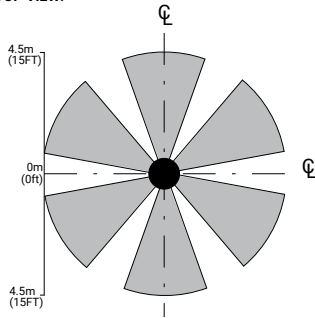

SIDE VIEW:

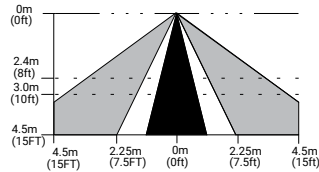

**Note:** Installation of integrated sensors within 3-ft (1m) of HVAC air vents is not recommended. The pattern shown is intended solely as a general guide and is not to scale.

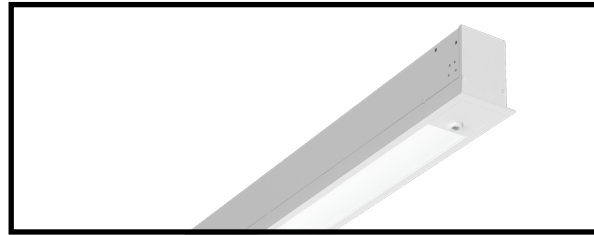

**Luminaire with standalone sensor**



**Standalone Spaces WaveLinx LITE**



**Standalone Spaces WaveLinx CAT**



**Networked Spaces WaveLinx PRO**



**Enterprise WaveLinx CORE**

	Luminaire with standalone sensor	Standalone Spaces WaveLinx LITE	Standalone Spaces WaveLinx CAT	Networked Spaces WaveLinx PRO	Enterprise WaveLinx CORE
<b>Occupancy</b>	Yes	Yes	Yes	Yes	Yes
<b>Daylighting</b>	Yes	Yes	Yes	Yes	Yes
<b>Wallstations</b>	-	Yes	Yes	Yes	Yes
<b>Gateways</b>	-	-	-	1 WAC	300 WACs
<b>Devices (MAX)</b>	-	40 per Area (1120 per space)	40 per Area	200 per WAC2	32,500 per CORE Enterprise
<b>Software</b>	-	WaveLinx LITE Mobile App	WaveLinx CAT Mobile App	WaveLinx Mobile App	CORE
<b>Areas</b>	-	28 per Space	Unlimited	50 per WAC2	up to 3,000
<b>Zones</b>	-	16 per Area	16 per Area	16 per Area	up to 9,000
<b>Scheduling</b>	-	-	-	Local	Global
<b>VividTune™</b>	-	-	-	Yes	Yes
<b>Plug-Load Control</b>	-	Yes	Yes	Yes	Yes
<b>Low-Voltage Power</b>	-	-	Yes	Yes	Yes
<b>Integration</b>	-	-	-	-	BACnet, API
<b>Dashboards</b>	-	-	-	-	Energy, Occupancy
<b>Configuration</b>	-	Installer	Installer	Technician	Technician / IT

**SCALABILITY**



**WaveLinx expands from a single standalone device up to Enterprise with 32,500 devices**

*\*Note: WaveLinx LITE devices can be upgraded to WaveLinx PRO via an OTA firmware update. The OTA and system configuration can only be performed by Cooper Lighting Solutions specialists. WaveLinx Area Controller(s) would also need to be added to complete the solution.*

## Integrated Sensors

Refer to default sensor details below for integrated sensor locations of individual and straight runs. Please include preferred integrated sensor locations when providing sketch/drawing for a custom pattern.

- Standard Sensor with Luminaire Control
- Auxiliary Sensor used for Sensor Coverage

### Individual Luminaire Default Sensor Placement

≤8ft Individual

>8ft Individual

### Straight Run Default Sensor Placement

Beginning of Run (BOR)

Intermediate Section (INT)

End of Run (EOR) > 4ft

End of Run (EOR) ≤ 4ft

## Battery Location Details

### Battery Location

	< 4ft	≥ 4ft
Define 2	External (B1 or B2)	External (B1 or B2) or Internal (B3) IC Rated < 865Lm/ft
Define 3	External (B1 or B2)	Internal (B1, B2, B3) IC Rated < 1000Lm/ft
Define 4	External (B1 or B2)	Internal (B1, B2, B3) IC Rated < 1020Lm/ft
Define 5	External (B1 or B2)	Internal (B1, B2, B3) IC Rated < 1090Lm/ft

### Chicago Plenum Battery Location

	< 4ft	≥ 4ft
Define 2	Consult Factory	Internal (B3) IC Rated < 865Lm/ft
Define 3	Consult Factory	Internal (B1, B2, B3) IC Rated < 1000Lm/ft
Define 4	Consult Factory	Internal (B1, B2, B3) IC Rated < 1020Lm/ft
Define 5	Consult Factory	Internal (B1, B2, B3) IC Rated < 1090Lm/ft

## Luminaire Weight (lbs/ft)

2.65