Project	Catalog #	Туре	
Prepared by	Notes	Date	



Interactive Menu

- Ordering Information page 2
- Additional Resources page 3
- Wiring Diagrams page 5
- Connected Systems page 5
- Product Warranty

WaveLinx Wired

FLT-SP-MV-DC2, FLT-SP-MV-DC1, FLT-SP-240-DC2, FLT-SP-240-DC1, FLT-SP-347-DC2, FLT-SP-347-DC1

Sensor Powerpack

Typical Applications

Office • Education • Healthcare • Hospitality • Retail • Industrial • Manufacturing • Outdoor

Product Certification




Product Features



Top Product Features

- Supports up to five (5) occupancy/vacancy
- Plenum rated
- Device identification buzzer
- Integrated with Greengate sensors

Junction Box Mounting

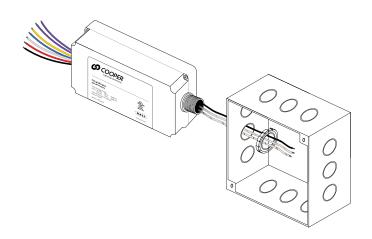



P additional product diagrams

WaveLinx Wired

Order Information: This is an accessory for the WaveLinx Wired. When ordering, specify the Powerpack as a separate system accessory. The Sensor Powerpack is compatible with OAC, VAC and OAWC Greengate sensor that include the –R option.

Catalog Number

Catalog Number	Description	Input Voltage	Number of Sensors
FLT-SP-MV-DC2	Sensor Powerpack 120/277V - class 2 installation	120/277 VAC	5
FLT-SP-MV-DC1	Sensor Powerpack 120/277V - class 1 installation	120/277 VAC	5
FLT-SP-240-DC2	Sensor Powerpack 240V - class 2 installation	240 VAC	5
FLT-SP-240-DC1	Sensor Powerpack 240V - class 1 installation	240 VAC	5
FLT-SP-347-DC2	Sensor Powerpack 347V - class 2 installation	347 VAC	5
FLT-SP-347-DC1	Sensor Powerpack 347V - class 1 installation	347 VAC	5

Sensor Compatibility and Sensor Setup

The following Greengate sensors will have their LED blink when the Sensor Powerpack that powers the sensors is in Commissioning Mode.

 $\label{eq:please} Please \ refer \ to \ the \ Greengate \ sensor \ installation \ instructions \ for \ sensor \ setup.$

WARNING: Do not enable the "Zero Time Delay" DIP Switch on the sensor.

Wall Mount Occupancy Sensors	Ceiling Mount Occupancy Sensors
OAWC-DT-120W-R	OAC-P-0500-R
OAWC-P-120W-R	OAC-P-1500-R
OAWC-P-009L-H-R	OAC-U-0501-R
	OAC-U-1000-R
	OAC-U-2000-R
	0AC-DT-0501-R
	0AC-DT-1000-R
	0AC-DT-2000-R

Note: The Sensor Powerpack can power other types of low voltage sensors. However, to take advantage of the Sensor Powerpack's built-in commissioning mode, it is highly recommended to use the Sensor Powerpack with the above Greengate sensor models.

Note: Please refer to the individual Greengate specification sheets for more information on the capabilities of these occupancy sensors.

Product Specifications

Key Features

- Supports up to five (5) occupancy sensors Reduces the cost of connecting low voltage PIR, ultrasonic and dual tech sensors to WaveLinx Wired by 90%.
 Five occupancy sensors can be grouped together to provide a large coverage area with a single address being shared for all five sensors.
- Plenum rated Eliminates the need for a junction box when installed in a plenum-rated area, i.e. areas where air handling equipment is present.
- Device identification buzzer Reduces the time to locate a Sensor Powerpack installed in a ceiling thanks to the buzzer sound if troubleshooting is required.
- Integrated with Greengate sensors Greengate sensors connected to the Sensor Powerpack will blink in commissioning mode allowing installers to easily identify sensors connected to a specific Sensor Powerpack.

Mechanical

Dimensions: 1.7"H x 2.6"W x 6.1"L (43.2mm x 66mm x 155mm) Mountina:

Mounts to the side of a 4" square box via ½" knockout

Housing: Medium impact injection molded housing. ABS resin with 5VA flame rating. Plenum rated for external junction box mounting with Teflon coated leads.

Environment:

- **Operating Temperature:** 32° F to 104° F (0° C to 40° C). For indoor use only
- **Operating Humidity:** 10% to 90% RH (non-condensing)
- Storage Temperature: 32° F to 104° F (0° C to 40° C)

Control Specification:

- · Communication Interface: WaveLinx Wired Local Bus (via SCMD4)
- Current Draw: 2mA per device (max)

Output: 15 VDC, 125mA to operate up to five Greengate sensors

Electrical

Input Voltage : 120/277 VAC, 240 VAC, or 347 VAC +/- 10% Input Frequency: 50/60 Hz

Standards/Ratings

- cULus Listed Energy Management Equipment (UL916)
- Manufactured in an ISO 9001 certified factory
- Meets ASHRAE Standard 90.1 requirements
- Meets IECC 2015 requirements
- Meets CEC Title 24 requirements


Warranty

Five year warranty standard




System architecture

Simple WaveLinx Wired system

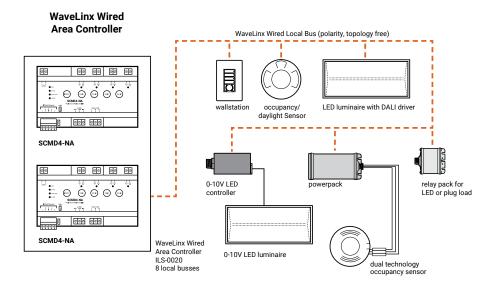

Complete WaveLinx Wired system

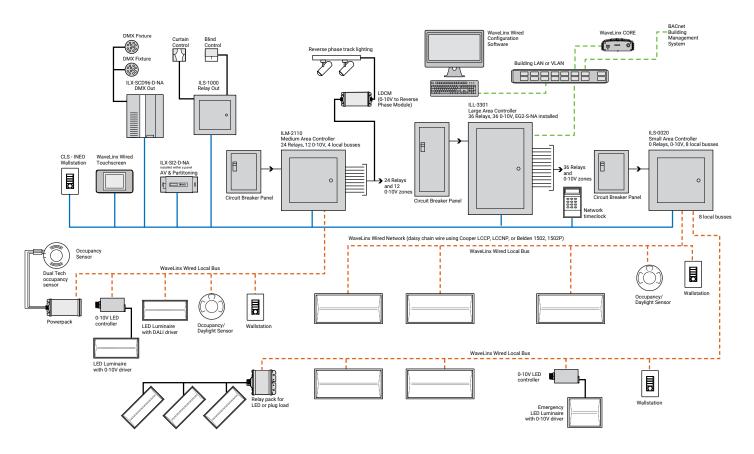



WaveLinx Wired


Sensor Powerpack

Wiring Diagram

The line voltage section of the Sensor Powerpack is to be connected to a 120/277 VAC or 240 VAC or 347 VAC 20 amp branch circuit to provide unit power. The Powerpack provides a 15V output required to power the low voltage sensors.

The low voltage section of the Sensor Powerpack is to be connected to a junction box using the accompanying the NPT adapter and the lock nut.


The following wiring diagram shows how to properly wire the device between the line voltage input, low voltage sensors and the two wire communications bus.

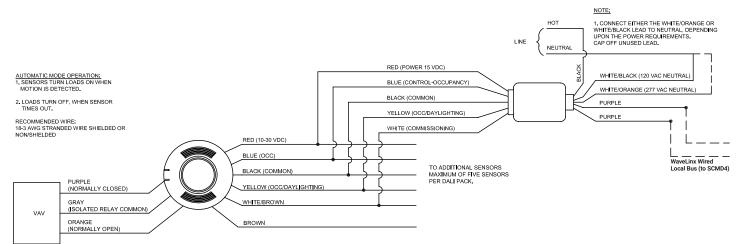

NOTE: USE ONE SET OF CONTACTS

CLASS 1 WIRING

CLASS 2 WIRING

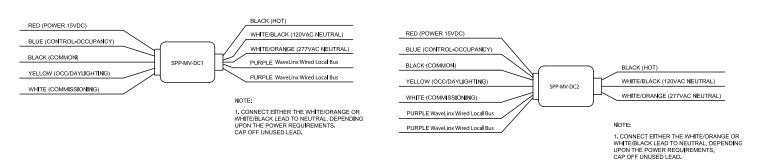

Overview

The Sensor Powerpack provides power to low voltage sensors and communicates occupancy data status on the WaveLinx Wired Local Bus to the SCMD4. The Sensor Powerpack is ideal for open area spaces that require multiple dual technology sensors.



WaveLinx Wired

Sensor Powerpack

View

WaveLinx Network

and IT Guidance

Technical Guide

Sample System Topology:


This diagram shows the main components of the WaveLinx wired and PRO wireless connected lighting system.

The **WaveLinx PRO wireless system** communicates using wireless mesh technology based on the IEEE 802.15.4 standard. A PoE LAN connection for each WaveLinx Area Controller (WAC) is required for power and data access to the building lighting network.

The **WaveLinx wired system** controls the devices using relay, 0-10V, DMX and the WaveLinx wired digital local bus. The WaveLinx wired system connects to the building LAN using the EG2 module. Each WaveLinx wired area controller communicates on the WaveLinx wired network.

WaveLinx Area Controllers (WAC) and WaveLinx Ethernet Gateways (EG2) communicate with WaveLinx CORE over the Ethernet network.

Please refer to the WaveLinx PRO Wireless Network and IT Guidance Technical Guide and WaveLinx Wired Network and IT Guidance Technical Guide for more information.

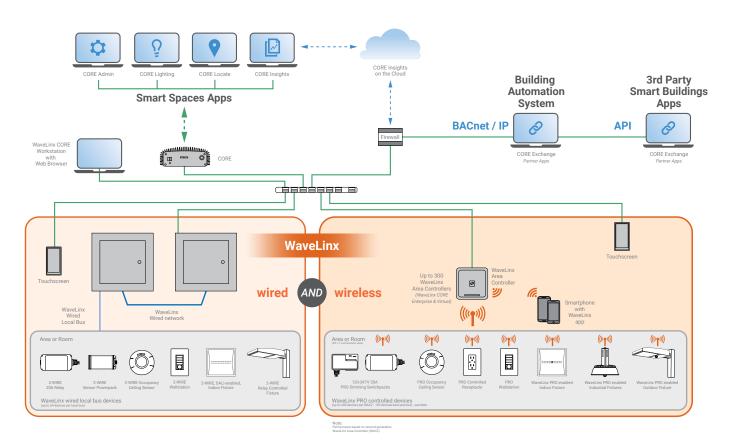

Control Systems

- WaveLinx
- WaveLinx wired
- VividTune



Cooper Lighting Solutions 1121 Highway 74 South Peachtree City, GA 30269 P: 770-486-4800 www.cooperlighting.com © 2024 Cooper Lighting Solutions All Rights Reserved.

Specifications and dimensions subject to change without notice.