

## DESCRIPTION

The Bridge™ LED recessed offers a traditional yet modern design with the latest in solid-state lighting technology. High performing WaveStream™ optics allow for maximum energy savings and optimal illumination in an ultra-minimalistic shallow recessed fixture. Two WaveStream optic options are available; a fully uniform pattern and a square pattern that provides a unique translucent appearance without sacrificing performance. Additional shielding options are also available including rectangular perf, round perf, and nano-prism inlays. Available in 2x2, 2x4, 1x4 sizes along with several popular metric sizes, the Bridge is highly configurable with well-thought-out options and a number of architectural styles for application versatility.

## SPECIFICATION FEATURES

### Construction

Shallow 100mm deep housing is a 22 gauge steel reflector with injection molded high-reflectance polycarbonate end plates securely attached with integral snaps and screws for strength, rigidity and the elimination of gaps. WaveStream light engine with extruded aluminum heatsinks span across the bottom of the luminaire. Drivers can be accessed via plenum. Large access plate for supply connection. Fixture weight: 12.0 lbs (5.4 kg).

### Optics

Optical grade acrylic embedded with patented WaveStream Accu-Aim™ optics for optimal

distribution, excellent uniformity, and high performance. Center light engine becomes virtually clear in the off-state.

### Shielding

Perf pattern and nano-prismatic inlays are available as additional aesthetic options. Perf inlay available in round or rectangular pattern. Nano-prismatic inlay is a high light transmission material offering additional brightness mitigation.

### Finish

Fixture housing and back reflector are high reflectance white using electrostatically applied polyester

powder coat paint for durability and luminous uniformity.

### Electrical

Long-life LED system coupled with electrical driver to deliver optimal performance. Projected life is 100,000 at 74% lumen output. LEDs are available in 3000K, 3500K or 4000K with a typical CRI ≥ 85. Standard drivers are 0-10 volt continuous dimming that work with any 0-10V control/dimmer. Or, specify Digital Addressable Lighting Interface (DALI) drivers; for use with Fifth Light controls. See ordering information for details.

### Mounting

Integral pry-out tabs secure luminaire to ceiling grid from above. Fixture offers tie-in locations for tie-wire on all corners. Consult local code for appropriate tie-wire recommendations.

### Compliance

Components are UL recognized and luminaires are cULus listed for 25°C ambient environments, damp location listed, and RoHS compliant.

### Warranty

Five-year warranty.



## BRIDGE - BRG

Fully Uniform


### WaveStream™ LED

600mm x 600mm Recessed  
100mm Depth

CERTIFICATION DATA  
cULus - 1598  
Damp Location Listed  
IC Rated  
LM79/LM80 Compliant  
ROHS Compliant

### LumaWatt Pro

Wireless sensing & control system | **enlighted**

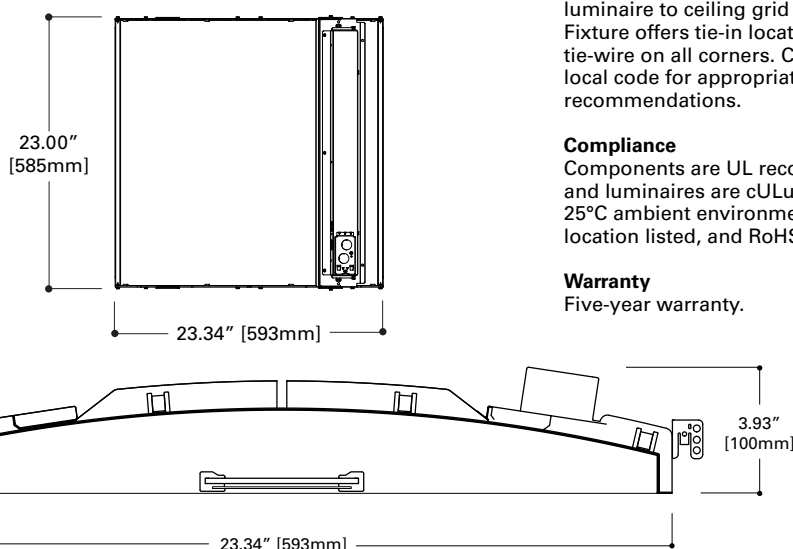


## ORDERING INFORMATION

Sample Number: BRG-WS-3L35-LD2-UNV-66-T1-STD-SVPD1-EL14W-AR

Series <sup>(1)</sup>		Optics/Shielding	Light Level (Nominal delivered lumens)	Color Temperature	LED Version	Input Voltage
BRG = Bridge Recessed		WS = WaveStream Full Pattern WD = WaveStream with Round Perf Inlay WG = WaveStream with Rectangular Perf Inlay WN = WaveStream with Nano Prism Perf Inlay	1 = Light Level 1 (2000 Lms, 19W) 2 = Light Level 2 (2500 Lms, 23W) 3 = Light Level 3 (3000 Lms, 29W) 4 = Light Level 4 (3500 Lms, 34W) 5 = Light Level 5 (4000 Lms, 39W) 6 = Light Level 6 (4500 Lms, 46W)	L30 = LED 3000K L35 = LED 3500K L40 = LED 4000K	LD2 = LED 2.0	UNV = Universal (120V-277V) 347 = 347V <sup>(2)</sup>
Size	Ceiling Type	Driver Type	Integral Sensor (Optional)	Emergency (Optional)	Options	
66 = 600mm x 600mm	T1 = 1" T-Bar <sup>(3)</sup>	STD = Standard 0-10V (10%-100%) HCD = 0-10V (1%-100%) STP = Step Dimming (Bi-Level, 40%) <sup>(5)</sup> 5LT = Fifth Light DALI (10%-100%) <sup>(4)</sup> 5LTHD = Fifth Light DALI (0.1%-100%) <sup>(4)</sup> SR = Sensor Ready (5%-100%)	SVPD1 = Integrated Occupancy/Daylight Sensor for Local Control <sup>(6) (11)</sup> SWPD1 = WaveLinx Wireless Integral Sensor <sup>(7) (11)</sup> LWIPD1 = Lumawatt Pro Wireless Integral Sensor <sup>(8) (11)</sup>	EL14W = 14-watt 120V-277V Integral EM Battery Pack <sup>(9)</sup> RRU = UL924 Bypass Relay <sup>(10)</sup>	AR = Air Return CE = CE Marking W6 = 6' Whip Flex W12 = 12' Whip Flex	

See page 3 for technical notes

## PHOTOMETRICS

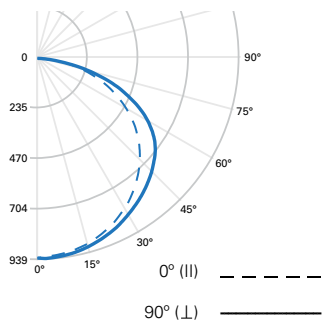

**FILE NAME:** BRG-WS-3L35-LD2-UNV-66-STD.IES

**LAMP:** (LD2) LED 3500K

**LUMENS:** 3095 Lm

**WATTS:** 28.7 W

**EFFICACY:** 108 Lm/W


**SC:** (II) 1.3, (I) 1.36

## ZONAL LUMENS SUMMARY

Zone	Lumens	% Fixture
0°-30°	733	23.7
0°-40°	1224	39.5
0°-60°	2299	74.3
0°-90°	3095	100

LUMINANCE DATA (CD/M<sup>2</sup>)

Vertical Angle	0°	45°	90°
45°	3073	3212	3426
55°	3124	3354	3746
65°	3086	3501	3883
75°	2925	3434	3491
85°	2186	2128	1848

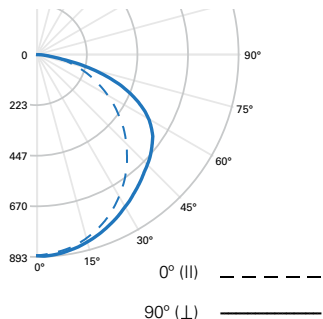

**FILE NAME:** BRG-WG-3L35-LD2-UNV-66-STD.IES

**LAMP:** (LD2) LED 3500K

**LUMENS:** 2799 Lm

**WATTS:** 28.7 W

**EFFICACY:** 98 Lm/W


**SC:** (II) 1.22, (I) 1.32

## ZONAL LUMENS SUMMARY

Zone	Lumens	% Fixture
0°-30°	682	24.4
0°-40°	1124	40.2
0°-60°	2075	74.1
0°-90°	2799	100

LUMINANCE DATA (CD/M<sup>2</sup>)

Vertical Angle	0°	45°	90°
45°	2567	2845	3149
55°	2449	2994	3524
65°	2297	3236	3799
75°	2110	3354	3336
85°	1874	2087	1606

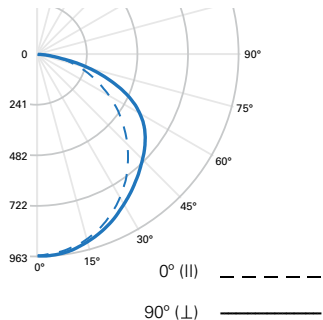

**FILE NAME:** BRG-WN-3L35-LD2-UNV-66-STD.IES

**LAMP:** (LD2) LED 3500K

**LUMENS:** 2885 Lm

**WATTS:** 28.7 W

**EFFICACY:** 101 Lm/W

**SC:** (II) 1.22, (I) 1.30

## ZONAL LUMENS SUMMARY

Zone	Lumens	% Fixture
0°-30°	732	25.4
0°-40°	1199	41.6
0°-60°	2176	75.4
0°-90°	2885	100

LUMINANCE DATA (CD/M<sup>2</sup>)




Vertical Angle	0°	45°	90°
45°	2738	2949	3207
55°	2611	3034	3482
65°	2440	3168	3654
75°	2217	3155	3137
85°	1981	1981	1606

Note: Round Perf (WD) photometric performance is similar to Rectangular Perf (WG). Reference IES-format photometry online for more detail.

## LUMEN MAINTENANCE

Ambient Temperature	TM-21 Lumen Maintenance (100,000 hours)	Theoretical L70 (Hours)
25°C	>74%	115,000

## INLAY OPTIONS

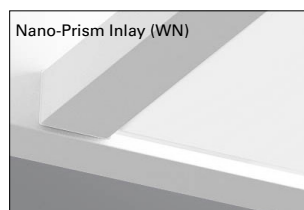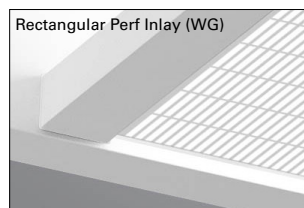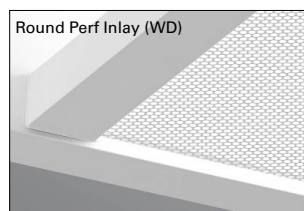

## ENERGY AND PERFORMANCE DATA

600x600 – Bridge Light Level Outputs and Distributions (3500K)				
Series	Light Level	Delivered Lumens	Wattage	Efficacy (LPW)
BRG-WS	1	2071	18.6	111
	2	2536	23.1	110
	3	3095	28.7	108
	4	3586	33.8	106
	5	4039	39.1	103
	6	4557	45.7	100
BRG-WD	1	1867	18.6	100
	2	2288	23.1	99
	3	2791	28.7	97
	4	3235	33.8	96
	5	3643	39.1	93
	6	4111	45.7	90
BRG-WG	1	1872	18.6	101
	2	2293	23.1	99
	3	2799	28.7	98
	4	3243	33.8	96
	5	3652	39.1	93
	6	4121	45.7	90
BRG-WN	1	1931	18.6	104
	2	2364	23.1	103
	3	2885	28.7	101
	4	3343	33.8	99
	5	3765	39.1	96
	6	4248	45.7	93

## TECHNICAL NOTES

1. Dimming wires come standard in all LED fixtures but can be capped in the field for standard switched operation.
2. Integral 347V electronic driver with STD 0-10V option only. Factory supplied remote transformer for all other driver/dimming options.
3. Only compatible with 15/16" (24mm) Grid
4. Must be used in conjunction with a DALI control system. For a complete listing of Fifth Light Technology products and other solutions from Cooper Lighting Solutions, visit [www.cooperlighting.com](http://www.cooperlighting.com).
5. 600x600: STP driver not available in Light Levels 1, 2, and 3.
6. SV sensor works only with 0-10V drivers and is factory prewired to the driver for stand-alone control. Order part #ISHH-01 for Programming Remote and part #ISHH-02 for Personal Control Remote.
7. SW sensor works only with STD and HCD 0-10V drivers. Designed for use with the WaveLinX Wireless Connected Lighting system. For complete WaveLinX wireless solutions, visit [www.cooperlighting.com](http://www.cooperlighting.com).
8. LWI sensor option requires the use of the SR driver. Must be used in conjunction with a LumaWatt Pro control system. For complete LumaWatt Pro wireless solutions, visit [www.cooperlighting.com](http://www.cooperlighting.com).
9. Integral emergency battery pack is 14W maximum, 90 minute output. A test switch/indicator button can be tested safely from the ground using a laser pointer, while the patented EZ Key prevents accidental discharge of the battery during construction. For approximate delivered lumens multiply the lumens per watt of the desired fixture by the wattage of the emergency battery pack (100 lm/W x 14=1400 lumens)
10. Used to bypass local control and dimming for life safety operation. Product height with transfer device is 5" (126mm).
11. When luminaire is on an emergency circuit, integrated sensors require the RRU Emergency Option to disable sensor control during emergency operation.

## SVPD1 INTEGRATED SENSOR


The Bridge with Integrated Sensor technology provides automatic energy savings without sacrificing performance. Traditionally, these types of energy savings required coordination between the luminaire and a lighting control system. The Bridge delivers superior lighting with integrated PIR occupancy and daylighting controls.

Capture the benefits of traditional lighting controls, without complicated coverage planning or special wiring. Ideal for new construction or retrofit, the Bridge delivers automatic ON to an energy saving light level, while ensuring lighting is turned OFF when the space is unoccupied.

The integral daylight sensor reduces the need for special daylight zone planning. The luminaire will automatically adjust the light level based on reflected light beneath the sensor in a closed loop method.


Occupied daylight light levels and unoccupied light levels can be adjusted using the integrated sensor programming remote (Catalog Number: ISHH-01). The integrated sensor personal remote (Catalog Number: ISHH-02) provides code compliant manual raise, lower, ON, OFF control.

The Bridge with Integrated Sensor is easy to install with no special wiring and ensures energy savings out-of-the-box with default control settings.

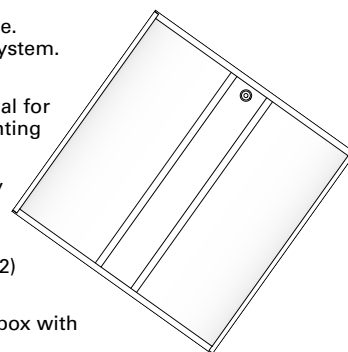


### How it works:


- As the user enters the space controlled by the integral sensor, the lighting turns ON to the daylight level (default 500 lux).
- Lighting will remain at the daylight level until the space is unoccupied. This will start the occupancy timeout period (default 20 minutes).
- If the space remains unoccupied for half of the timeout period, the lighting will automatically reduce to the Energy Saver light level. This adjustable light level is typically half of the occupied daylight level.
- At the end of the timeout period the lighting will go to the unoccupied light level. This adjustable light level uses the OFF default setting.

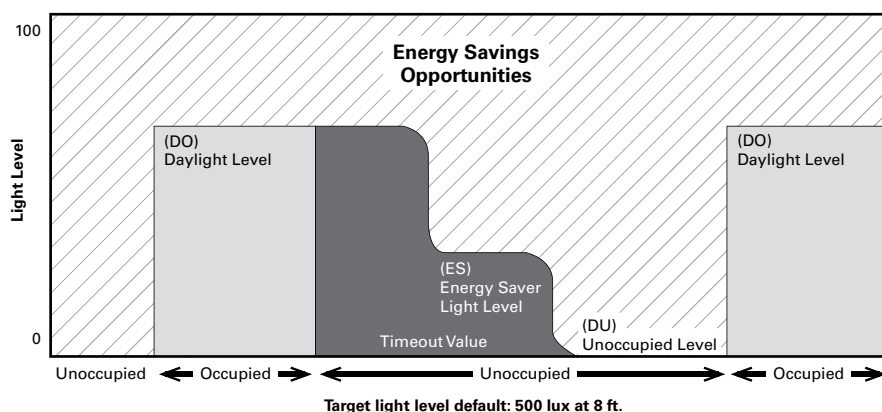

### Coverage

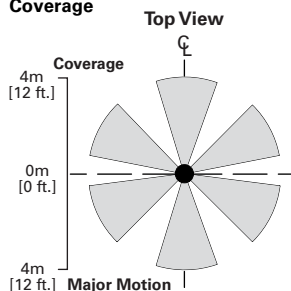

### Side View

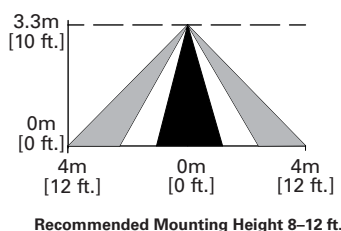

### Optional Remote Controls



ISHH-01 Programming Remote



ISHH-02 Personal Control Remote