



WaveLinx

Emergency Lighting Control Solutions

Flexible. Connected. Secure.



WaveLinx EM

Emergency Lighting Control Solutions

Delivering peace of mind with simplicity

Imagine a building coming alive with activity. People are working, shopping, or enjoying themselves.

But what happens if the lights go out?

Egress and emergency lighting come in as silent guardians,
ensuring a safe path out in case of an emergency or power outage.

By keeping these critical pathways illuminated,
everyone inside can find their way out calmly and quickly.

Table of Contents

Design Guidelines for WaveLinx Wireless Emergency Solution

Overview	4
How it works	7
Sequence of Operations	8

WaveLinx PRO - How it works

Scenario 1: Wireless Emergency (PRO) with integrated sensors	10
Scenario 2: Wireless Emergency (PRO) with Switchpacks	11
Scenario 3: Wireless Emergency (PRO) with Emergency Switchpack and Integrated Sensors	12
Scenario 4: Wireless Emergency (PRO) - Industrial with Switchpacks	13
Scenario 5: Wireless Emergency (PRO) - Industrial with Emergency Switchpack and Integrated Sensors	14

WaveLinx LITE - How it works

Scenario 1: Wireless Emergency (LITE) with integrated sensors	16
Scenario 2: Wireless Emergency (LITE) with Switchpacks	17
Scenario 3: Wireless Emergency (LITE) with Emergency Switchpack and Integrated Sensors	18
Scenario 4: Wireless Emergency (LITE) - Industrial with Switchpacks	19
Scenario 5: Wireless Emergency (LITE) - Industrial with Emergency Switchpack and Integrated Sensors	20

WaveLinx CAT - How it works

Scenario 1: Wired Emergency (CAT) with Switchpacks	22
Scenario 2: Wired Emergency (CAT) - Industrial with Switchpacks	23

WaveLinx Service and Support

24

WaveLinx Wireless Emergency Solution

Overview

Centralized Emergency Power Solutions (generators and inverters) are excellent sources for backup power. However, the drawback for them has always been additional wiring requirements and complex (internal) fixture wiring, with an emergency transfer relay device (ETRD), for lighting solutions with integrated controls.

The WaveLinx Emergency (WEM) solution offered by WaveLinx wireless (PRO and LITE) and wired (CAT) makes it easy to design your emergency lighting solution without the need for additional cable runs or an additional ETRD device within the luminaire.

All scenarios presented in this design guide are UL924 compliant.

Figure 1: 0-10V Fixture with a PRO or LITE ETRD versus one with the PRO or LITE WEM solution.


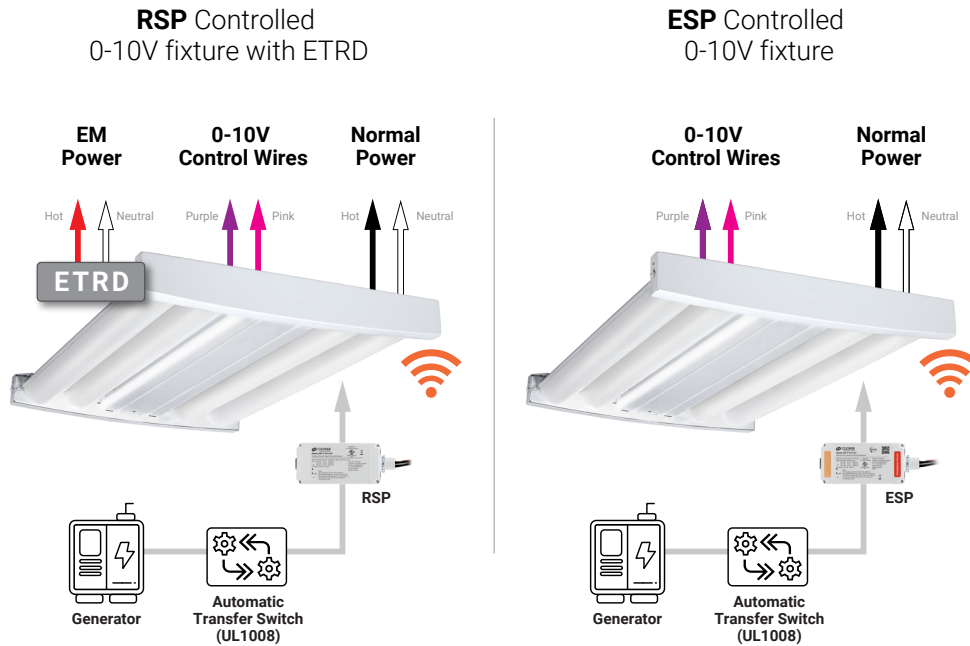


Figure 2: 0-10V Fixture with CAT ETRD versus one with the CAT WEM solution.



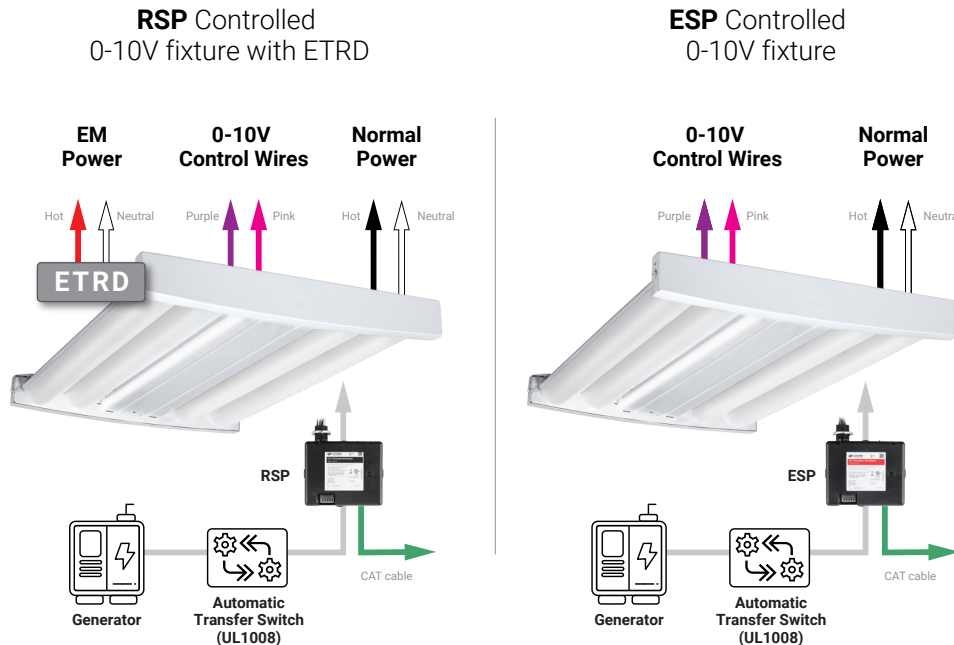

With the ability for an integrated wireless emergency (WEM) solution, there is no need for additional cable runs, resulting in the best of both worlds. Backup power without a battery life and no additional wiring, resulting in significant savings.

Figure 3: 0-10V Fixture with a PRO or LITE ETRD versus one with the PRO or LITE WEM solution.



WPS integrated sensor with ETRD emergency

WPS-WEM integrated wireless emergency sensor




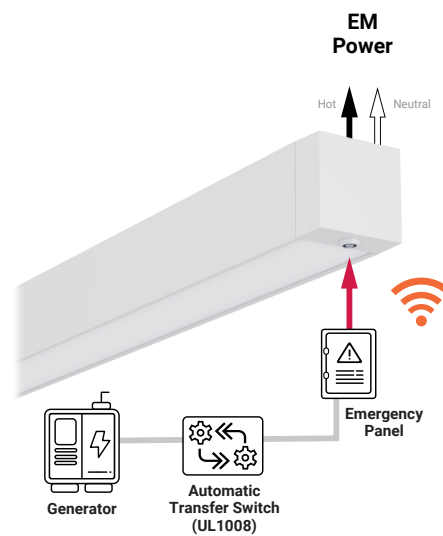


Figure 4: 0-10V Fixture with CAT ETRD versus one with the CAT WEM solution.

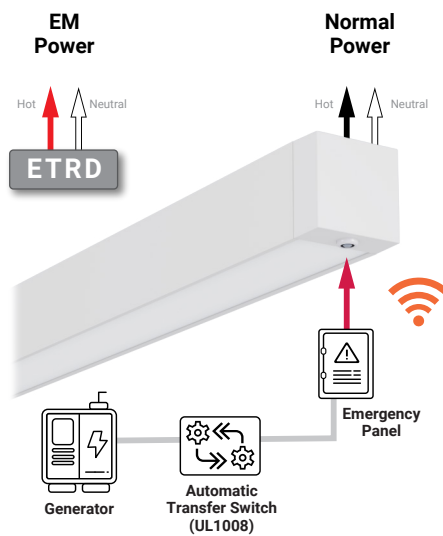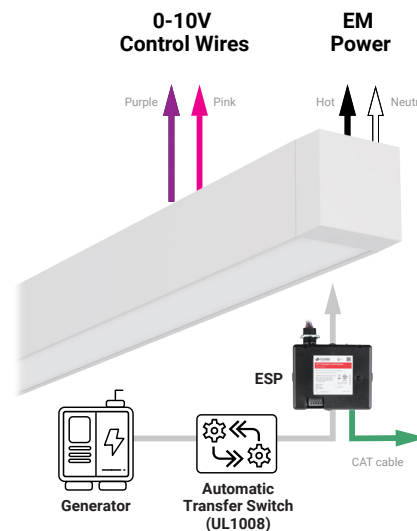

RSP Controlled 0-10V fixture with ETRD

ESP Controlled 0-10V fixture

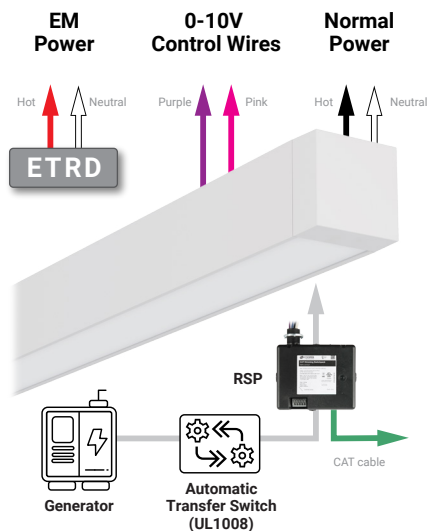


Emergency power control for integrated fixtures

Wireless Emergency

The **WaveLinX PRO** (WPS-WEM-R3) and **WaveLinX LITE** (WLS-WEM-R3) integrated wireless emergency sensors respond to an emergency condition during a loss of power to the normal power sensing (NPS) devices – without the need for additional feeds.

Once normal devices are provisioned, they'll communicate with the emergency device confirming the presence of normal power. Both the PRO and LITE mobile apps test modes lets you simulate an emergency event without having to transfer power. This functionality allows for regular testing of installed devices without accessing upstream breakers.

- Integrated sensors removes the need for any externally mounted UL924 device
- The PRO emergency sensor integrates and communicates with other PRO devices whereas the LITE sensor communicates and integrates in the LITE system
- The sensor(s) work in tandem with normal power sense devices in an emergency set to provide a robust emergency solution

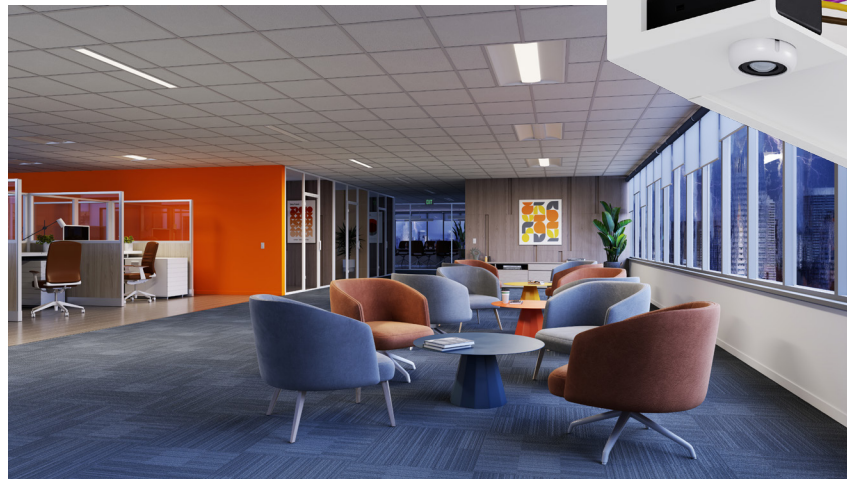

How it works

Essentially, WaveLinx emergency systems are designed to meet UL924 standards, so they activate lighting within 10 seconds of a power loss and maintain lighting while emergency power is present and normal power is not.

If Normal Power Sensing (NPS) devices detect power loss, it triggers associated WaveLinx Emergency Modules (WEM) or Emergency Switchpack (ESP) by way of wireless or wired signals via PRO/LITE and CAT respectively. The WEMs then override lighting controls until power is restored, at which point the system is returned to normal operation.

A UL1008 transfer switch ensures continuous power to WEMs – which also simplifies installation by eliminating separate feeds.

Extensive testing by Cooper Lighting Solutions confirms the reliability and compliance of both wireless and wired solutions.




Normal Operation

Normal Power Sensing (NPS) devices are used to detect the presence of normal power for an emergency set. Through wired or wireless communication, the NPS devices communicates the presence of normal power to the emergency device allowing the lighting controls to function seamlessly for a reliable user experience. By leveraging the NPS devices to sense normal power, an additional (normal power) electrical feed is not required to the emergency device.

Emergency Operation

During an emergency event, the NPS will lose power and while the EM devices will receive power from the emergency circuit that has transferred power (through an upstream UL1008 transfer switch) to the central backup power. When an NPS device loses power, the EM device will force the fixtures associated with that device to 100% output and ignore all manual actions. Once power is returned the EM devices will return to their last state.

WaveLinx Wireless Emergency Sequence of Operations

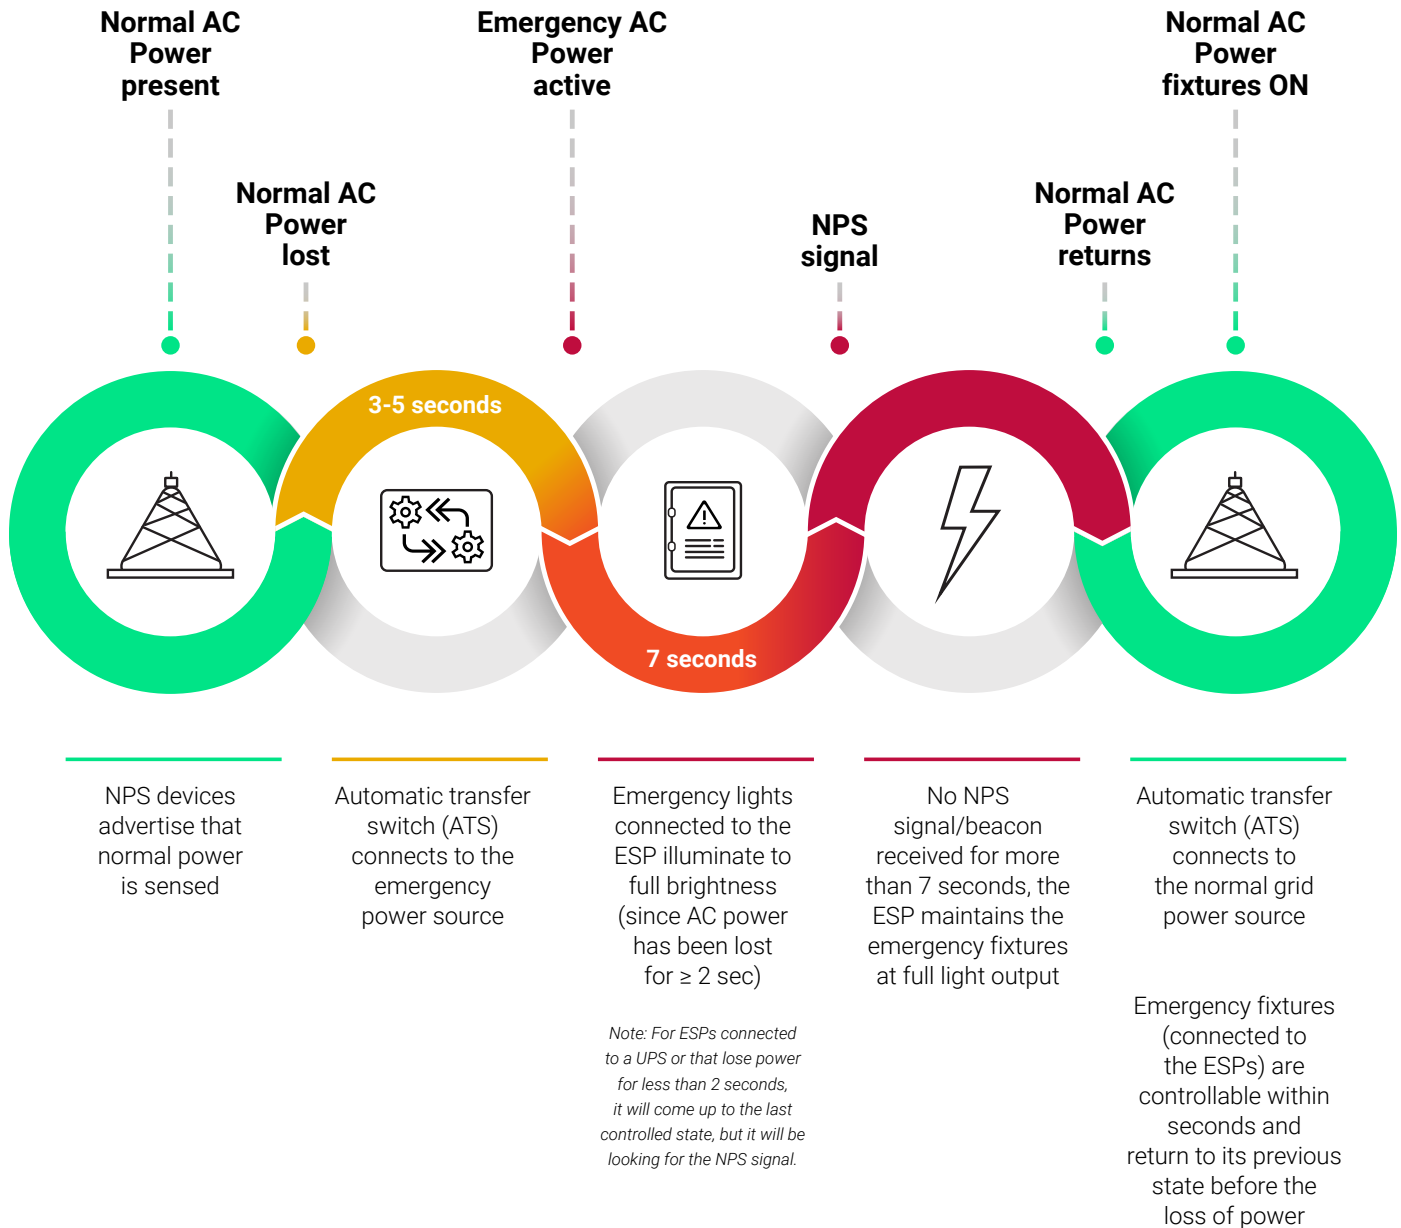

Emergency Provisioning

To ensure proper Emergency Mode operation:

- The Emergency Switchpack must be powered from an emergency lighting circuit and be connected to emergency lighting fixture(s). Fixtures may be ON/OFF or dimmable via 0-10V connection.
- The Emergency Switchpack must be provisioned to a zone within a Networked Area.
- At least one normal power sensing (NPS) device must be provisioned to a zone belonging to the same Networked Area. The NPS device must be connected to a normal power circuit. Up to three NPS devices may be assigned to trigger EM Mode if desired (allows for three phase monitoring if one NPS device is connected to a normal circuit from each electrical phase).
- In the case of WaveLinx CAT, the NPS beacon is provided by provisioned RSP via the category cable. In this case, when the RSP loses AC power, the NPS beacon will stop triggering the emergency mode. In multiple phase situations, where more than one RSP could be AC powered by one of the phases, loss of an NPS beacon from one of the RSPs would trigger the EM mode (even though the category cable bus may be active).
- In the case of WaveLinx CAT, only RSPs that are AC powered can be NPS devices.

WaveLinx PRO

Emergency Lighting Control Solutions



The **WaveLinx PRO Emergency Switchpack** (ESP-P-010-347) is a lighting control device designed to control (on/off/dim) commercial and industrial lights while providing Emergency capabilities without additional hardware.

- Consists of a 120-347VAC 20A relay and a continuous 0-10V dimming control
- Integrates and communicates with other PRO devices and the WaveLinx Area Controller using the PRO protocol, a 2.4GHz wireless mesh network based on the IEEE 802.15.4 standard
- The device works in tandem with the normal power sense devices in an emergency set to provide an emergency solution


		NPS Compatible Devices			
		RSP-P-010-347	WPS (-WNPS)	WPS2 (-WNPS)	WPS4 (-WNPS)
Emergency Compatible Device	ESP-P-010-347	Y	Y	Y	Y

Other important guidelines


- Wireless EM devices cannot communicate with Wired NPS devices and, wired EM devices cannot communicate with Wireless NPS devices in one emergency set.
- During heavy network traffic (DSP, OTA upgrade) we may observe false triggers.

Note: If multiple WACs with NPS devices are within wireless range of each other, the WACs should be manually configured to ensure they operate on different wireless channels to improve NPS and network performance.

Design/System Limitations per WAC	
Guideline	Value
Max number of NPS devices a WAC can support	6
Max number of NPS devices that can be assigned to an emergency set	3
Max number of emergency sets	6

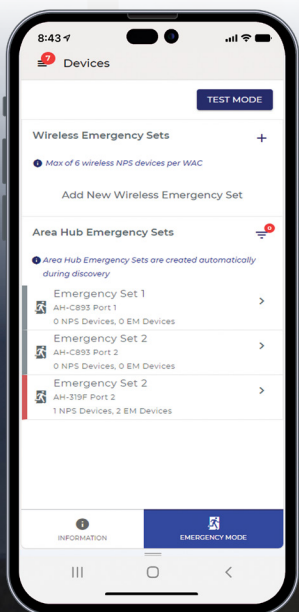

PRO Scenario 1: Wireless Emergency with Integrated Sensors

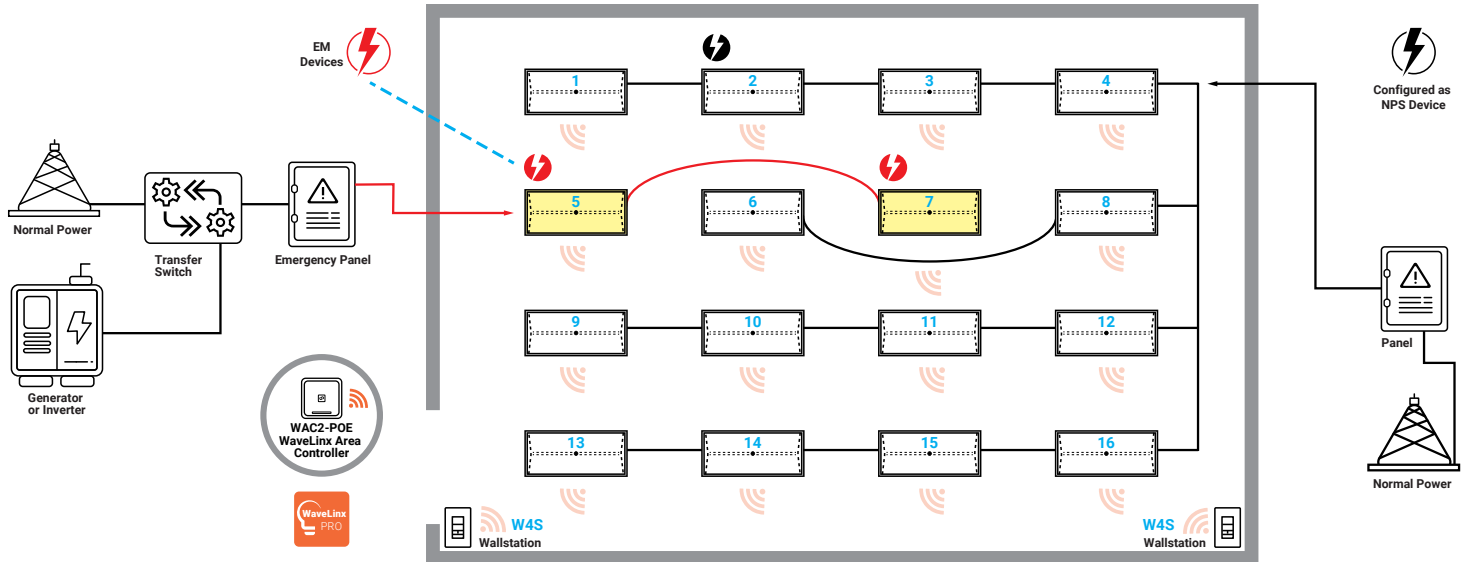


This scenario has the following bill of materials of WaveLinx PRO devices:



Bill of Material		
Quantity	Catalog #	Description
1	WAC2-POE	WaveLinx Area Controller
2	W4S-RL-W	WaveLinx PRO wallstation
2	24CZ2-40-UNV-WEM-L840-CD1-WPS-U	Cruze 2x4 with Wireless Emergency PRO Sensor
14	24CZ2-40-UNV-WNPS-L840-CD1-WPS-U	Cruze 2x4 with Normal Power Sensing (NPS) PRO Sensor

- In this scenario, we have 16 Cooper Lighting Solutions Cruze fixtures equipped with PRO sensors.
- Fixtures 5 and 7 are connected to the emergency panel.
- All other fixtures are controlled by the PRO sensors mounted in the fixtures.
- There are two W4s wallstations to enable local control.
- Since this is a PRO system, a WaveLinx Area Controller (WAC) has also been installed. When multiple WACs are used within range of each other, it's strongly recommended to ensure that the WACs are operating on different Zigbee channels.
- Fixture 2 is configured as Normal Power Sensing (NPS) device in the WaveLinx app.
- This device emits a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the WEM sensors in fixtures 5 and 7.
- In the event of an electrical power loss, fixture 2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and WEM sensor.
- WEM sensors for fixtures 5 and 7 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to their maximum level and override any manual commands from the wallstation.

PRO Scenario 2: Wireless Emergency with Switchpacks

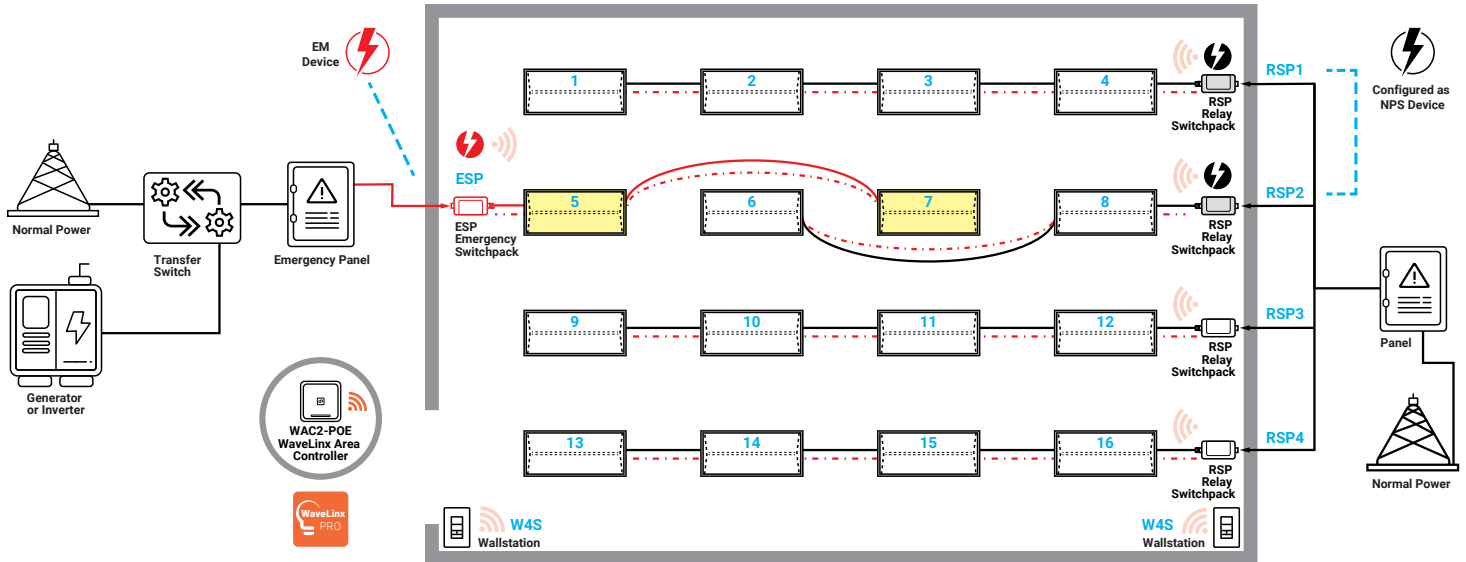


This scenario has the following bill of materials of WaveLinX PRO devices:



Bill of Material		
Quantity	Catalog #	Description
1	WAC2-POE	WaveLinX Area Controller
1	ESP-P-010-347	WaveLinX PRO emergency switchpack
4	RSP-P-010-347	WaveLinX PRO switchpack
2	W4S-RL-W	WaveLinX PRO wallstation
16	24EN-LD2-34-UNV-L835-CD-1-U	Encounter 2x4 with 0-10V dimming

- In this scenario, we have 16 Cooper Lighting Solutions Encounter fixtures equipped with a 0-10V dimming driver.
- Fixtures 5 and 7 are connected to the emergency panel via the PRO ESP.
- Fixtures 1~4 are controlled by RSP1, fixtures 6 and 8 are controlled by RSP2, fixtures 9~12 are controlled by RSP3, and fixtures 13~16 are controlled by RSP4.
- There are two W4S wallstations to enable local control.
- Since this is a PRO system, a WaveLinX Area Controller (WAC) has also been installed. When multiple WACs are used within range of each other, it's strongly recommended to ensure that the WACs are operating on different Zigbee channels.
- RSP1 and RSP2 are configured as Normal Power Sensing (NPS) devices in the PRO app.
- These devices emit a wireless beacon to indicate that normal AC power is present. These wireless beacons are detected by the ESP1.
- In the event of an electrical power loss, RSP1 and RSP2 will go offline and will consequently stop transmitting the NPS beacon. In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the ESP1. ESP1 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level and override any manual commands from the wallstation.

PRO Scenario 3: Wireless Emergency with Emergency Switchpack and Integrated Sensors

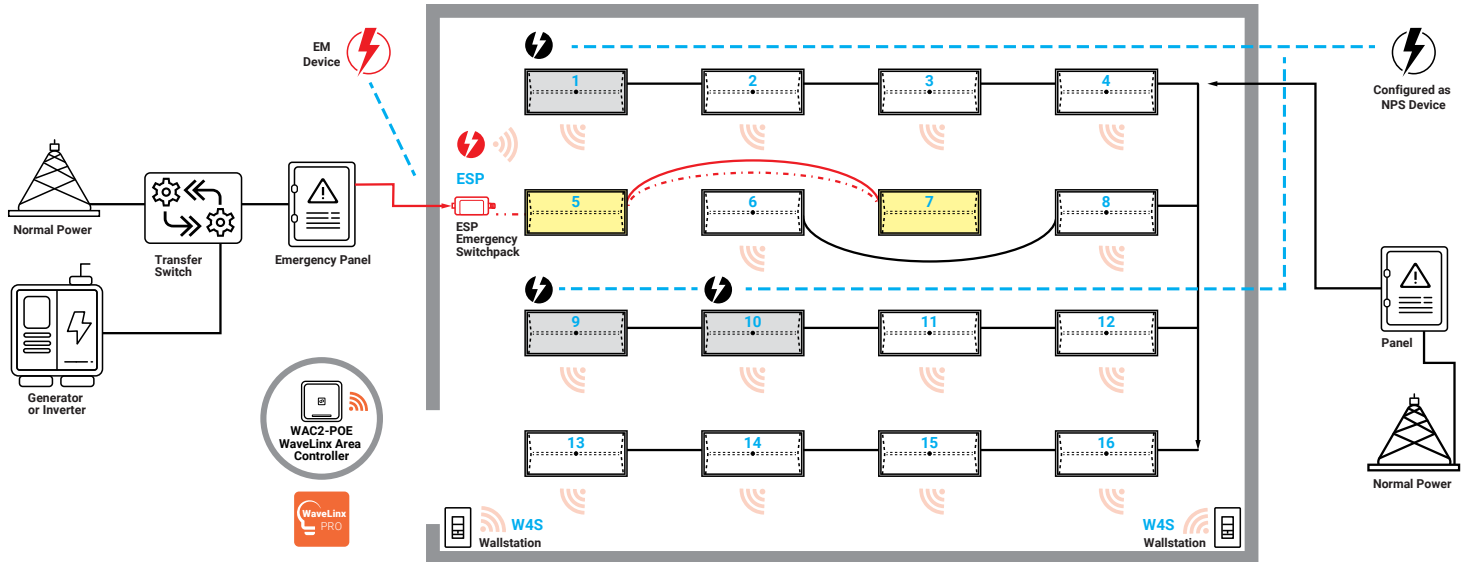


This scenario has the following bill of materials of WaveLinx PRO devices:



Bill of Material		
Quantity	Catalog #	Description
1	WAC2-POE	WaveLinx Area Controller
2	W4S-RL-W	WaveLinx PRO wallstation
1	ESP-P-010-347	WaveLinx PRO emergency switchpack
2	24EN-LD2-34-UNV-L835-CD-1-U	Encounter 2x4 with 0-10V dimming
14	24EN-LD2-34-UNV-WNPS-L835-CD-1-WPS-U	Encounter 2x4 with WaveLinx PRO NPS sensor

- In this scenario, we have 14 Cooper Lighting Solutions Encounter fixtures equipped with WaveLinx PRO sensors.
- Two fixtures are equipped with 0-10V dimming drivers.
- Fixtures 5 and 7 are connected to the emergency panel via the PRO ESP.
- All remaining fixtures are equipped with PRO NPS capable sensors.
- There are two W4S wallstations to enable local control.
- Since this is a PRO system, a WaveLinx Area Controller (WAC) has also been installed. When multiple WACs are used within range of each other, it's strongly recommended to ensure that the WACs are operating on different Zigbee channels.
- The WPS sensors in fixtures 1, 9, and 10 are configured as NPS devices in the PRO app. (Note only 1 NPS must be assigned for the emergency devices to operate with the NPS devices, additional NPS are optional). All other fixtures are NPS capable and are equipped with PRO NPS sensors.
- These fixtures emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the PRO ESP connected to fixtures 5 and 7.
- In the event of an electrical power loss, the WPS sensors in fixtures 1, 9, and 10 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the PRO ESP.
- The PRO ESP will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level ignoring any occupancy and daylight harvesting control strategies.
- It will also override any manual commands from the wallstations.

PRO Scenario 4: Wireless Emergency Industrial with Switchpacks

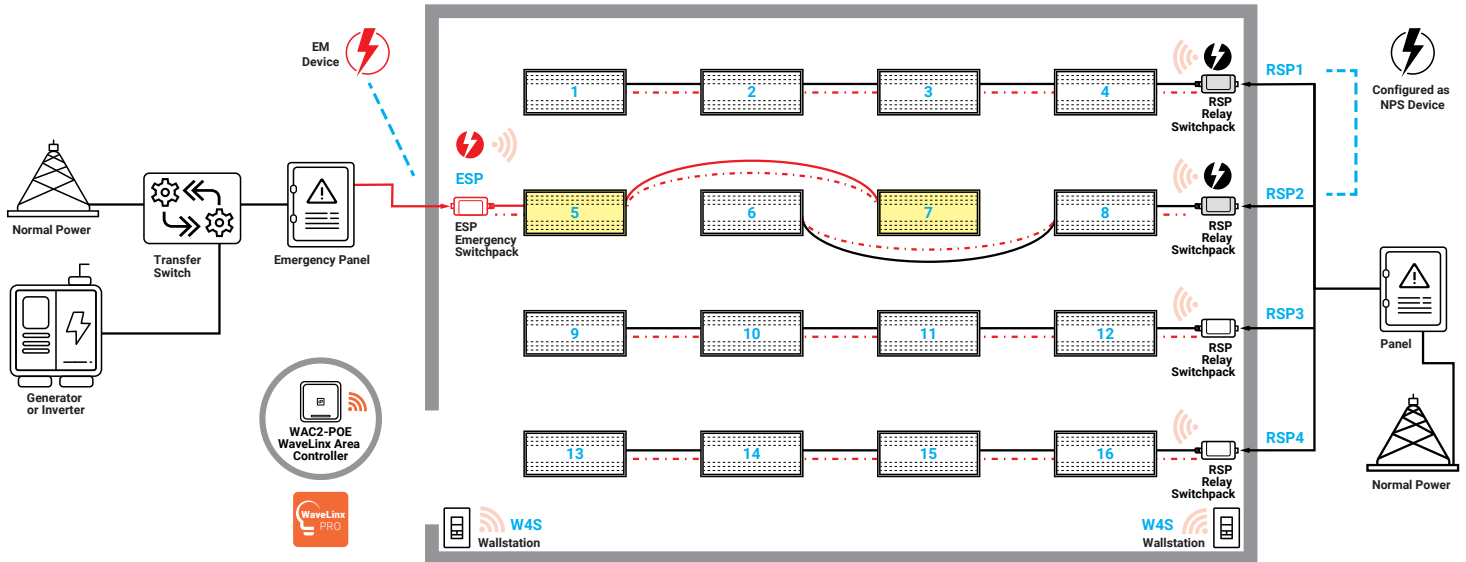


This scenario has the following bill of materials of WaveLinX PRO devices:



Bill of Material		
Quantity	Catalog #	Description
1	WAC2-POE	WaveLinX Area Controller
1	ESP-P-010-347	WaveLinX PRO emergency switchpack
4	RSP-P-010-347	WaveLinX PRO switchpack
2	W4S-RL-W	WaveLinX PRO wallstation
16	OHB-24SE-MFL-UNV-L840-CD-U	OHB 2ft with 0-10V dimming

- In this scenario, we have 16 Cooper Lighting Solutions Metalux OHB fixtures equipped with a 0-10V dimming driver.
- Fixtures 5 and 7 are connected to the emergency panel via the PRO ESP.
- Fixtures 1~4 are controlled by RSP1, fixtures 6 and 8 are controlled by RSP2, fixtures 9~12 are controlled by RSP3, and fixtures 13~16 are controlled by RSP4.
- There are two W4S wallstations to enable local control.
- Since this is a PRO system, a WaveLinX Area Controller (WAC) has also been installed. When multiple WACs are used within range of each other, it's strongly recommended to ensure that the WACs are operating on different Zigbee channels.
- RSP1 and RSP2 are configured as Normal Power Sensing (NPS) devices in the PRO app.
- These devices emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the ESP1.
- In the event of an electrical power loss, RSP1 and RSP2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the ESP1.
- ESP1 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level and override any manual commands from the wallstation.

PRO Scenario 5: Wireless Emergency Industrial with Emergency Switchpack and Integrated Sensors

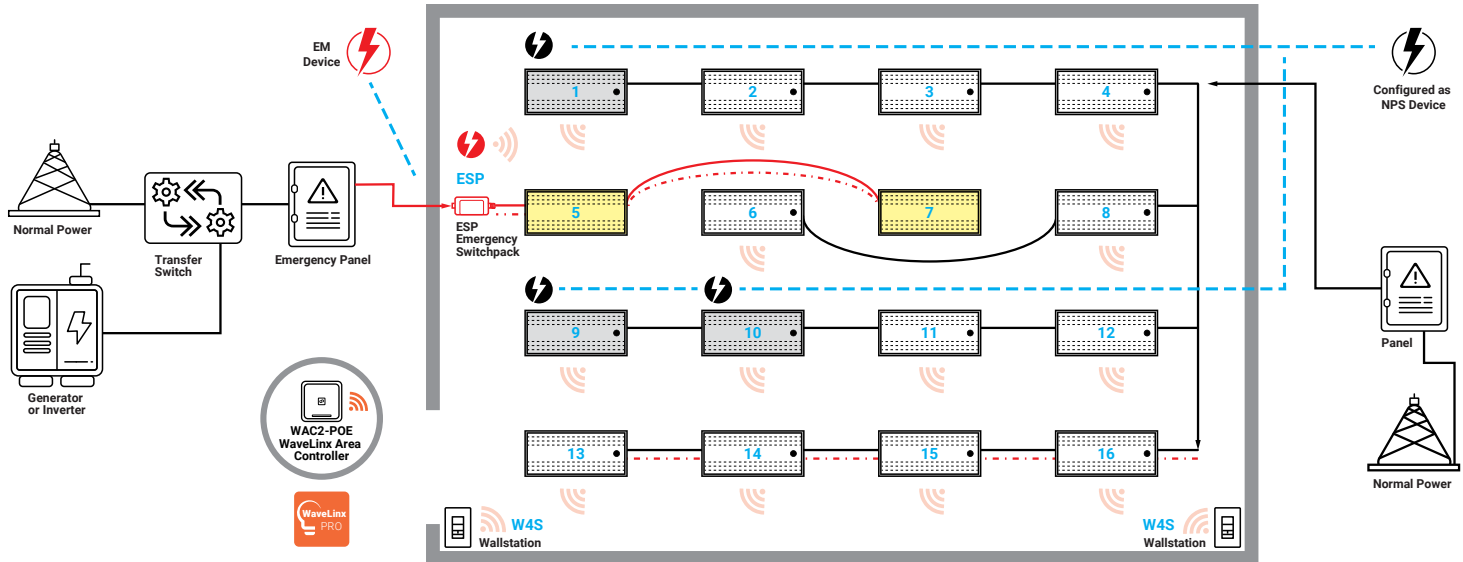

This scenario has the following bill of materials of WaveLinx PRO devices:




Bill of Material			
Quantity	Catalog #	Description	
1	WAC2-POE	WaveLinx Area Controller	
2	W4S-RL-W	WaveLinx PRO wallstation	
1	ESP-P-010-347	WaveLinx PRO emergency switchpack	
2	OHB-24SE-MFL-UNV-L840-CD-U	OHB 2ft with 0-10V dimming	
14	OHB-24SE-MFL-UNV-L835-WNPS-CD-WPS4-U	OHB 2ft with WaveLinx PRO NPS sensor	

- In this scenario, we have 14 Cooper Lighting Solutions Metalux OHB fixtures equipped with WaveLinx PRO sensors.
- Two fixtures are equipped with 0-10V dimming drivers.
- Fixtures 5 and 7 are connected to the emergency panel via the PRO ESP.
- All remaining fixtures are equipped with PRO NPS capable sensors.
- There are two W4S wallstations to enable local control.
- Since this is a PRO system, a WaveLinx Area Controller (WAC) has also been installed. When multiple WACs are used within range of each other, it's strongly recommended to ensure that the WACs are operating on different Zigbee channels.
- The WPS sensors in fixtures 1, 9, and 10 are configured as NPS devices in the PRO app.
(Note only 1 NPS must be assigned for the emergency devices to operate with the NPS devices, additional NPS are optional)
- These fixtures emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the PRO ESP connected to fixtures 5 and 7.
- In the event of an electrical power loss, the WPS sensors in fixtures 1, 9, and 10 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the PRO ESP.
- The PRO ESP will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level ignoring any occupancy and daylight harvesting control strategies.
- It will also override any manual commands from the wallstations.

WaveLinx LITE

Emergency Lighting Control Solutions

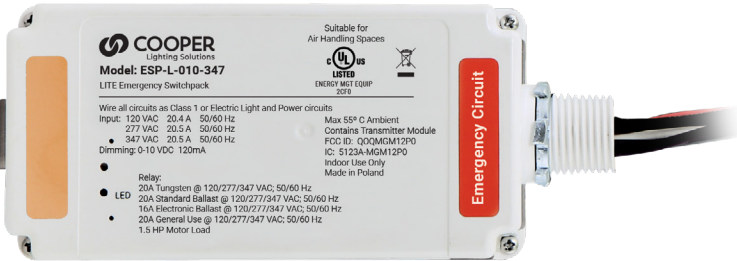

The **WaveLinx LITE Emergency Switchpack** (ESP-L-010-347) detects and responds to an emergency condition even during loss of power to normal devices – without the need for additional feeds. Once normal devices are provisioned, they'll communicate with the emergency device confirming the presence of normal power. The WaveLinx LITE mobile app test mode lets you simulate an emergency event without having to transfer power. This functionality allows for regular testing of installed devices without accessing upstream breakers.



- Consists of a 120-347VAC 20A relay with continuous 0-10V dimming control
- Integrates and communicates with other LITE devices using the LITE protocol
- The device works in tandem with normal power sense devices in an emergency set to provide an emergency solution

		NPS Compatible Devices			
		RSP-L-010-347	WLS (-WNPS)	WLS2 (-WNPS)	WLS4 (-WNPS)
Emergency Compatible Device	ESP-L-010-347	Y	Y	Y	Y


Other important guidelines

- Wireless EM devices cannot communicate with Wired NPS devices and, wired EM devices cannot communicate with Wireless NPS devices in one emergency set.
- During heavy network traffic (DSP , OTA upgrade) we may observe false triggers

Design/System Limitations	
Guideline	Value
Max number of NPS devices that can be assigned to an emergency set	3
Max number of emergency sets	1

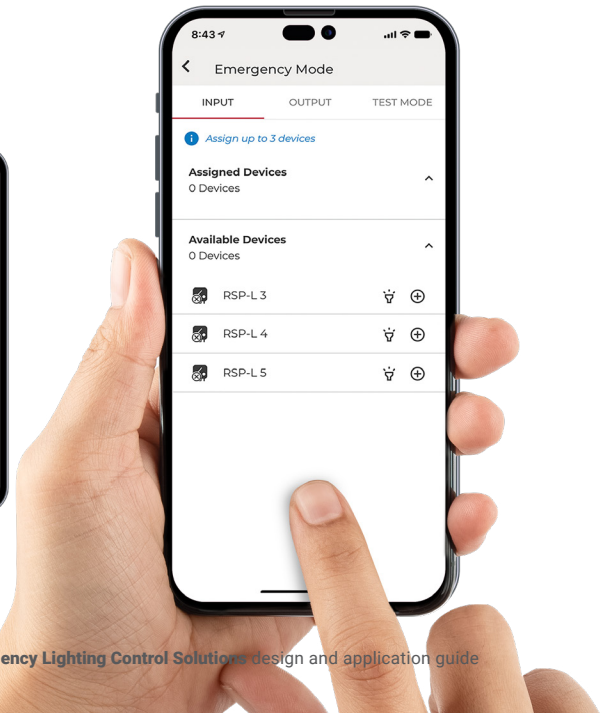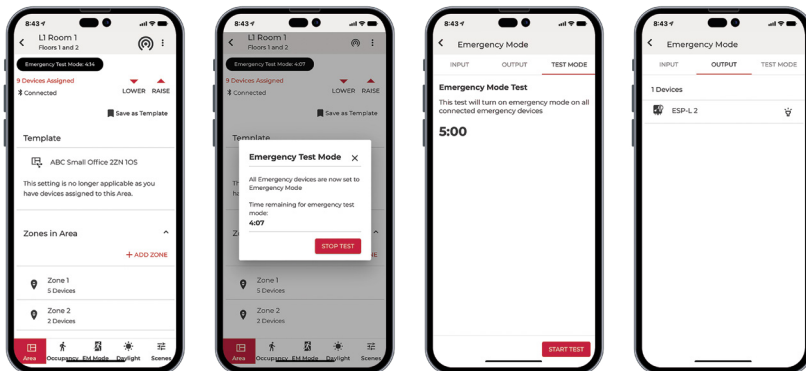

LITE Scenario 1: Wireless Emergency with Integrated Sensors

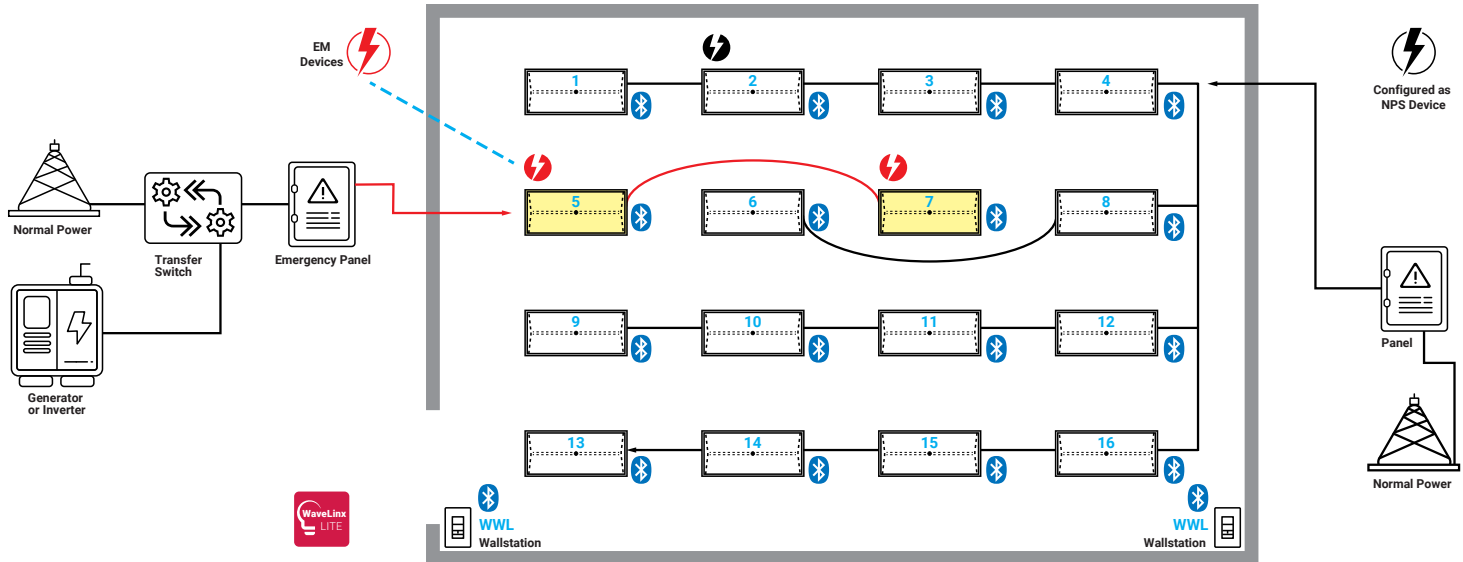


This scenario has the following bill of materials of WaveLinx LITE devices:



Bill of Material		
Quantity	Catalog #	Description
2	WWL5-RL-W	WaveLinx LITE wallstation
2	24CZ2-40-UNV-WEM-L840-CD1-WLS-U	Cruze 2x4 with Wireless Emergency LITE Sensor
14	24CZ2-40-UNV-WNPS-L840-CD1-WLS-U	Cruze 2x4 with Normal Power Sensing (NPS) LITE Sensor

- In this scenario, we have 16 Cooper Lighting Solutions Cruze fixtures equipped with LITE sensors.
- Fixtures 5 and 7 are connected to the emergency panel.
- All other fixtures are controlled by the LITE sensors mounted in the fixtures.
- There are two WWL5 wallstations to enable local control.
- Fixture 2 is configured as Normal Power Sensing (NPS) device in the LITE app.
- This device emits a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the WEM sensors in fixtures 5 and 7.
- In the event of an electrical power loss, fixture 2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and WEM sensor.
- WEM sensors for fixtures 5 and 7 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to their maximum level and override any manual commands from the wallstation.

LITE Scenario 2: Wireless Emergency with Switchpacks

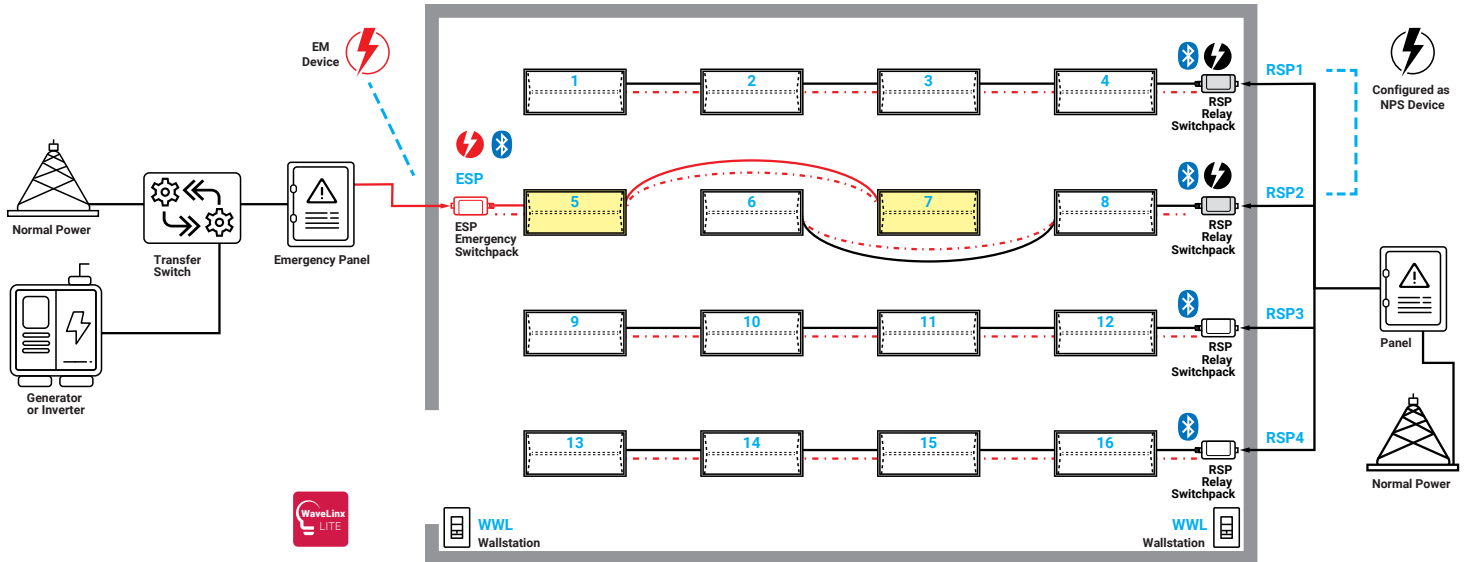


This scenario has the following bill of materials of WaveLinX LITE devices:



Bill of Material		
Quantity	Catalog #	Description
1	ESP-L-010-347	WaveLinX LITE emergency switchpack
4	RSP-L-010-347	WaveLinX LITE switchpack
2	WWL5-RL-W	WaveLinX LITE wallstation
16	24EN-LD2-34-UNV-L835-CD-1-U	Encounter 2x4 with 0-10V dimming

- In this scenario, we have 16 Cooper Lighting Solutions Encounter fixtures equipped with a 0-10V dimming driver.
- Fixtures 5 and 7 are connected to the emergency panel via the LITE ESP.
- Fixtures 1~4 are controlled by RSP1, fixtures 6 and 8 are controlled by RSP2, fixtures 9~12 are controlled by RSP3, and fixtures 13~16 are controlled by RSP4.
- There are two WWL5 wallstations to enable local control.
- RSP1 and RSP2 are configured as Normal Power Sensing (NPS) devices in the LITE app.
- These devices emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the ESP1.
- In the event of an electrical power loss, RSP1 and RSP2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the ESP1.
- ESP1 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level and override any manual commands from the wallstation.

LITE Scenario 3: Wireless Emergency with Emergency Switchpack and Integrated Sensors

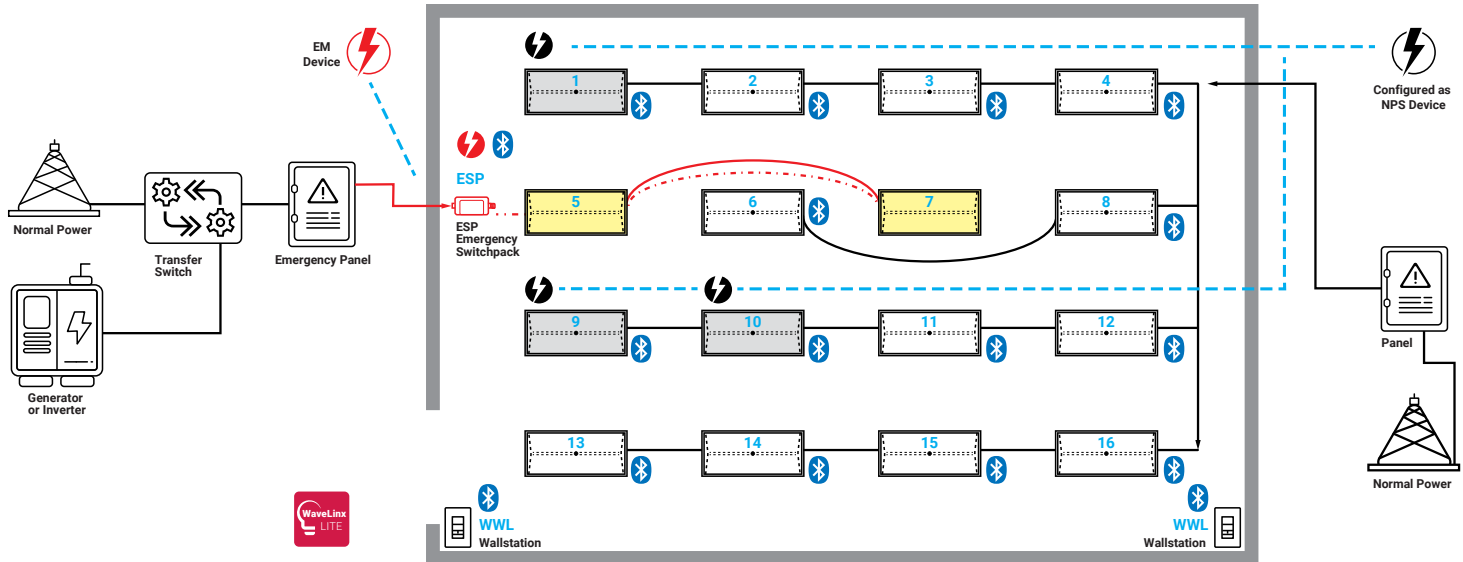


This scenario has the following bill of materials of WaveLinX LITE devices:



Bill of Material		
Quantity	Catalog #	Description
2	WWL5-RL-W	WaveLinX LITE wallstation
1	ESP-L-010-347	WaveLinX LITE switchpack
2	24EN-LD2-34-UNV-L835-CD-1-U	Encounter 2x4 with 0-10V dimming
14	24EN-LD2-34-UNV-WNPS-L835-CD-1-WLS-U	Encounter 2x4 with WaveLinX LITE NPS sensor

- In this scenario, we have 14 Cooper Lighting Solutions Encounter fixtures equipped with WaveLinX LITE sensors.
- Two fixtures are equipped with 0-10V dimming drivers.
- Fixtures 5 and 7 are connected to the emergency panel via the LITE ESP.
- All remaining fixtures are equipped with LITE NPS capable sensors.
- The remaining fixtures are equipped with a standard WaveLinX LITE integrated sensor.
- There are two WWL5 wallstations to enable local control.
- Since this is a LITE system, the system is provisioned using the WaveLinX LITE app.
- The WLS sensors in fixtures 1, 9, and 10 are configured as NPS devices in the LITE app. (Note only 1 NPS must be assigned for the emergency devices to operate with the NPS devices, additional NPS are optional).
- These fixtures emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the LITE ESP connected to fixtures 5 and 7.
- In the event of an electrical power loss, the WLS sensors in fixtures 1, 9, and 10 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the LITE ESP.
- The LITE ESP will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level ignoring any occupancy and daylight harvesting control strategies.
- It will also override any manual commands from the wallstations.

LITE Scenario 4: Wireless Emergency Industrial with Switchpacks

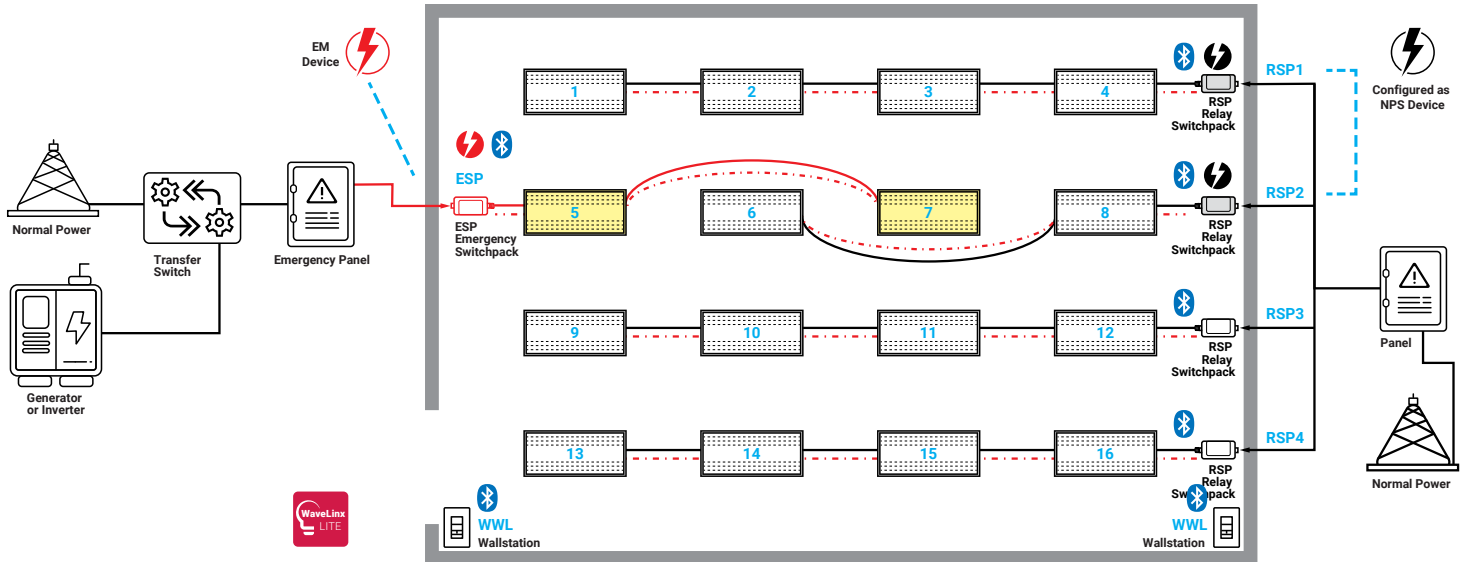


This scenario has the following bill of materials of WaveLinx LITE devices:



Bill of Material		
Quantity	Catalog #	Description
1	ESP-L-010-347	WaveLinx LITE emergency switchpack
4	RSP-L-010-347	WaveLinx LITE switchpack
2	WWL5-RL-W	WaveLinx LITE wallstation
16	OHB-24SE-MFL-UNV-L840-CD-U	OHB 2ft with 0-10V dimming

- In this scenario, we have 16 Cooper Lighting Solutions Metalux OHB fixtures equipped with a 0-10V dimming driver.
- Fixtures 5 and 7 are connected to the emergency panel via the LITE ESP (Emergency Switch Pack).
- Fixtures 1~4 are controlled by RSP1, fixtures 6 and 8 are controlled by RSP2, fixtures 9~12 are controlled by RSP3, and fixtures 13~16 are controlled by RSP4.
- There are two WWL5 wallstations to enable local control.
- Since this is a LITE system, the system is provisioned using the WaveLinx LITE app.
- These devices emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the ESP1.
- In the event of an electrical power loss, RSP1 and RSP2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the ESP1.
- ESP1 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level and override any manual commands from the wallstation.

LITE Scenario 5: Wireless Emergency Industrial with Emergency Switchpack and Integrated Sensors

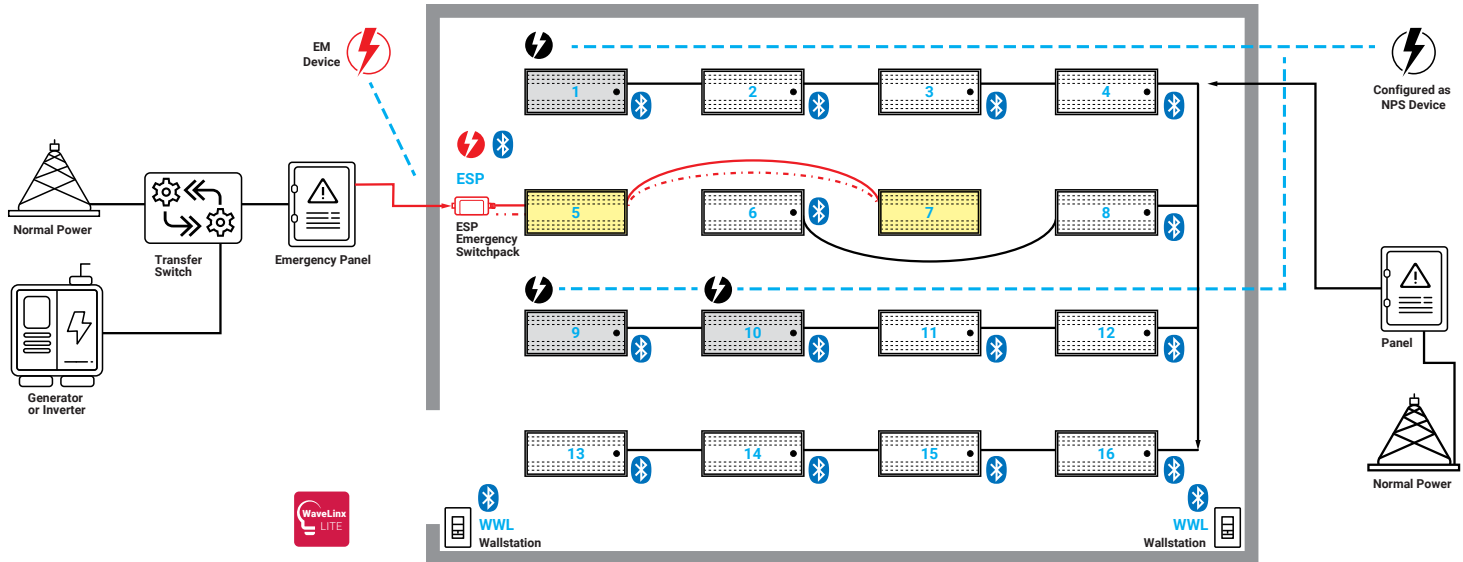

This scenario has the following bill of materials of WaveLinX LITE devices:



Bill of Material		
Quantity	Catalog #	Description
2	WWL5-RL-W	WaveLinX LITE wallstation
1	ESP-L-010-347	WaveLinX LITE emergency switchpack
2	OHB-24SE-MFL-UNV-L840-CD-U	OHB 2ft with 0-10V dimming
14	OHB-24SE-MFL-UNV-L835-WNPS-CD-WLS4-U	OHB 2ft with WaveLinX LITE sensor

- In this scenario, we have 14 Cooper Lighting Solutions Metalux OHB fixtures equipped with WaveLinX LITE sensors.
- Two fixtures are equipped with 0-10V dimming drivers.
- Fixtures 5 and 7 are connected to the emergency panel via the LITE ESP.
- All remaining fixtures are equipped with LITE NPS capable sensors.
- The remaining fixtures are equipped with a standard WaveLinX LITE integrated sensor.
- There are two WWL5 wallstations to enable local control.
- Since this is a LITE system, the system is provisioned using the WaveLinX LITE app.
- The WLS sensors in fixtures 1, 9, and 10 are configured as NPS devices in the LITE app.
- These fixtures emit a wireless beacon to indicate that normal AC power is present.
- These wireless beacons are detected by the LITE ESP connected to fixtures 5 and 7.
- In the event of an electrical power loss, the WLS sensors in fixtures 1, 9, and 10 will go offline and will consequently stop transmitting the NPS beacon. (Note only 1 NPS must be assigned for the emergency devices to operate with the NPS devices, additional NPS are optional)
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the LITE ESP.
- The LITE ESP will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level ignoring any occupancy and daylight harvesting control strategies.
- It will also override any manual commands from the wallstations.

WaveLinx CAT

Emergency Lighting Control Solutions



The **WaveLinx CAT Emergency Switchpack** (ESP-C-010-Z1) detects and responds to an emergency condition even during loss of power to normal devices – without the need for additional feeds. Once normal devices are provisioned, they'll communicate with the emergency device confirming the presence of normal power. The WaveLinx CAT mobile app test mode lets you simulate an emergency event without having to transfer power. This functionality allows for regular testing of installed devices without accessing upstream breakers.

- Consists of a 120-277VAC 20A relay with continuous 0-10V dimming control
- Integrates and communicates with other CAT devices via a category cable connection
- The device works in tandem with normal power sense devices in an emergency set to provide an emergency solution

Other important guidelines

- Wireless EM devices cannot communicate with Wired NPS devices and, wired EM devices cannot communicate with Wireless NPS devices in one emergency set.
- During heavy network traffic (DSP , OTA upgrade) we may observe false triggers
- The NPS beacon is provided by provisioned RSP via the category cable. In this case, when the RSP loses AC power, the NPS beacon will stop triggering the emergency mode. In multiple phase situations, where more than one RSP could be AC powered by one of the phases, loss of an NPS beacon from one of the RSPs would trigger the EM mode (even though the category cable bus may be active).
- Only RSPs that are AC powered can be NPS devices.



NPS Compatible Devices

RSP-C-010-Z1


Emergency Compatible Device	ESP-C-010-Z1	Y
-----------------------------	---------------------	---

Design/System Limitations

Guideline	Value
Max number of NPS devices that can be assigned to an emergency set	3
Max number of emergency sets (distributed mode)	1
Max number of emergency sets per port of the Area Hub (networked mode)	1

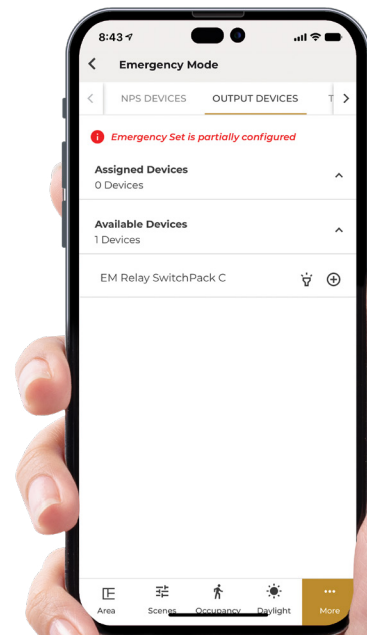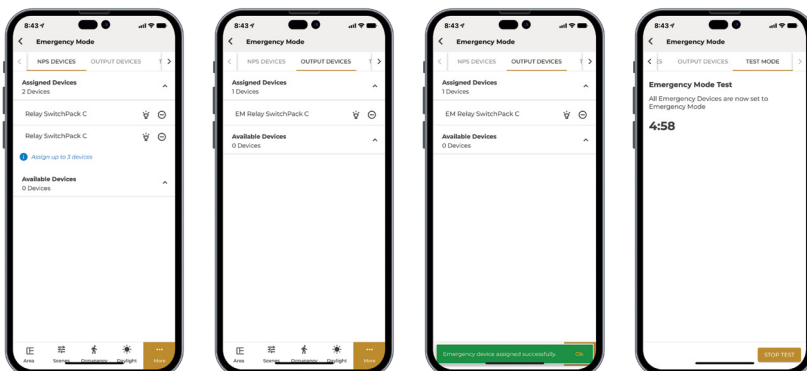

CAT Scenario 1: Wired Emergency (CAT) with Switchpacks

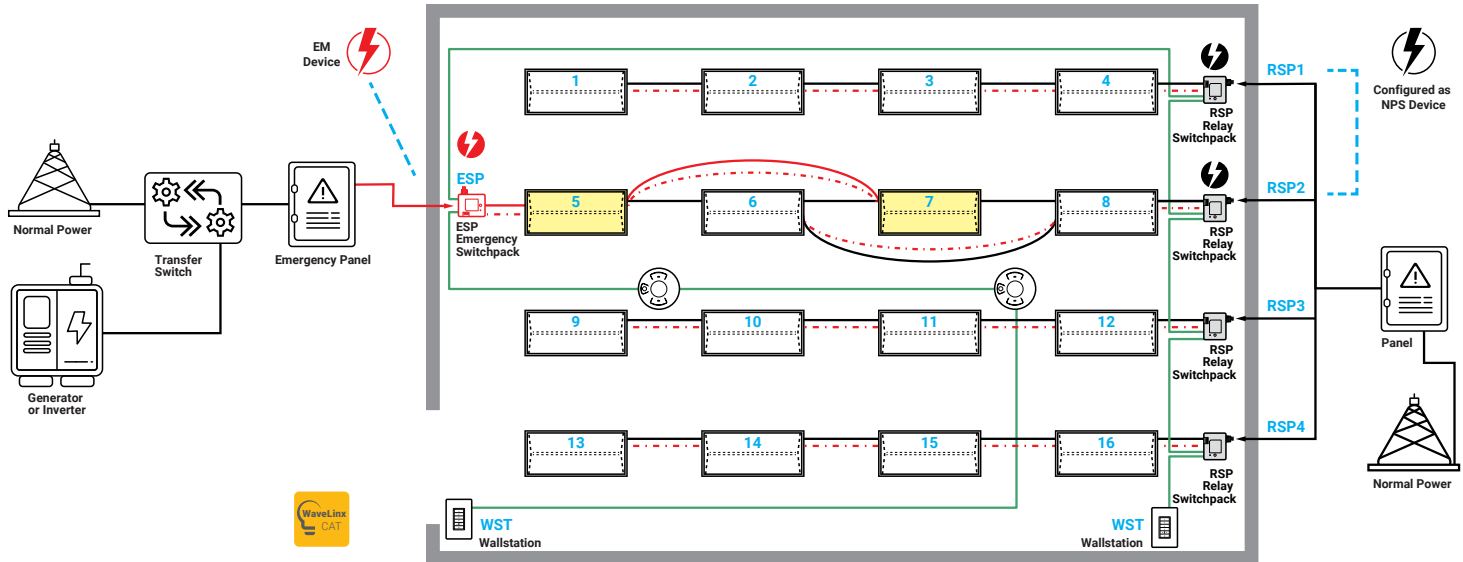


This scenario has the following bill of materials of WaveLinx CAT devices:



Bill of Material		
Quantity	Catalog #	Description
1	ESP-C-010-Z1	WaveLinx CAT emergency switchpack
4	RSP-C-010-Z1	WaveLinx CAT switchpack
2	WST-C-3D	WaveLinx CAT wallstation
2	OCS-C-P12	WaveLinx CAT ceiling sensor
16	24EN-LD2-34-UNV-L835-CD-1-U	Encounter 2x4 with 0-10V dimming

- In this scenario, we have 16 Cooper Lighting Solutions Encounter fixtures equipped with a 0-10V dimming driver.
- Fixtures 5 and 7 are connected to the emergency panel via the CAT ESP.
- Fixtures 1~4 are controlled by RSP1, fixtures 6 and 8 are controlled by RSP2, fixtures 9~12 are controlled by RSP3, and fixtures 13~16 are controlled by RSP4.
- There are two WST wallstations to enable local control.
- There are also 2 ceiling sensors installed for automatic control of the space based on occupancy or vacancy.
- In terms of emergency lighting, ESP1, RSP1, and RSP2 constitute an emergency set.
- RSP1 and RSP2 are configured as Normal Power Sensing (NPS) devices in the CAT app.
- These devices transmit a NPS beacon over the category cable to indicate that normal AC power is present.
- These wireless beacons are detected by the ESP1.
- In the event of an electrical power loss, RSP1 and RSP2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the ESP1.
- ESP1 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level and override any manual commands from the wallstation.

CAT Scenario 2: Wired Emergency (CAT) Industrial with Switchpacks

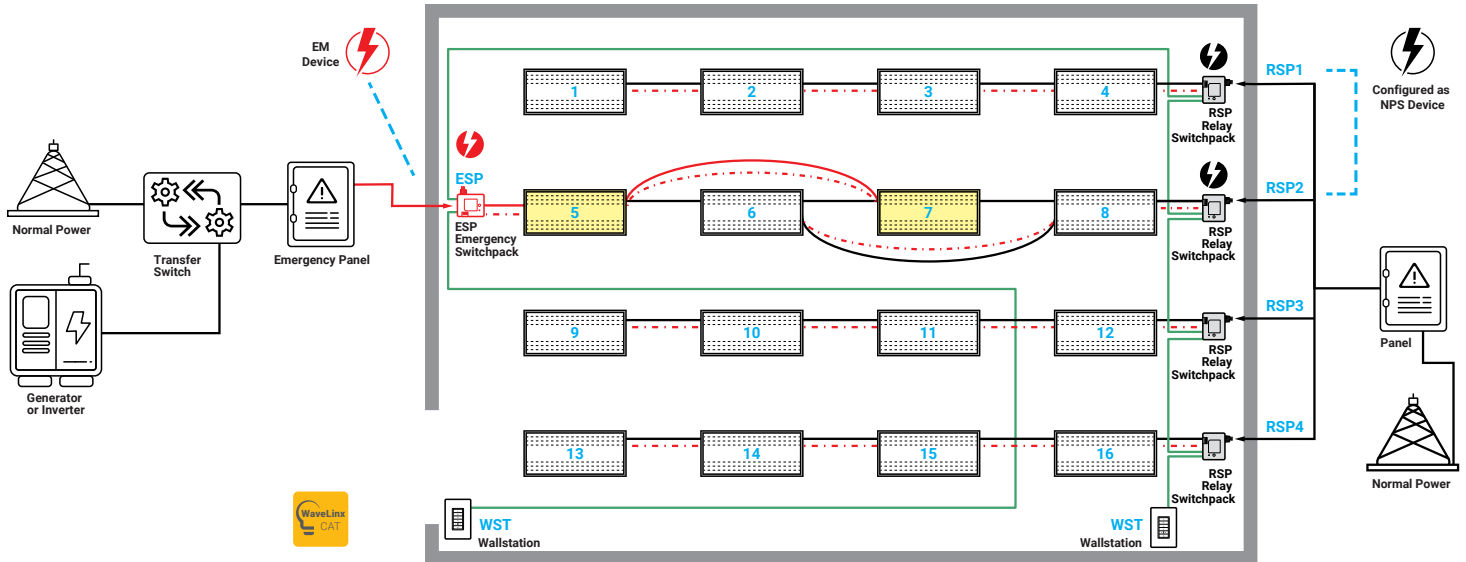

This scenario has the following bill of materials of WaveLinx CAT devices:



Bill of Material		
Quantity	Catalog #	Description
1	ESP-C-010-Z1	WaveLinx CAT emergency switchpack
4	RSP-C-010-Z1	WaveLinx CAT switchpack
2	WST-C-3D	WaveLinx CAT wallstation
16	OHB-24SE-MFL-UNV-L840-CD-U	OHB 2ft with 0-10V dimming

- In this scenario, we have 16 Cooper Lighting Solutions Metalux OHB fixtures equipped with a 0-10V dimming driver.
- Fixtures 5 and 7 are connected to the emergency panel via the CAT ESP.
- Fixtures 1~4 are controlled by RSP1, fixtures 6 and 8 are controlled by RSP2, fixtures 9~12 are controlled by RSP3, and fixtures 13~16 are controlled by RSP4.
- There are two WST wall stations to enable local control.
- In terms of emergency lighting, ESP1, RSP1, and RSP2 constitute an emergency set.
- RSP1 and RSP2 are configured as Normal Power Sensing (NPS) devices in the CAT app.
- These devices transmit a NPS beacon over the category cable to indicate that normal AC power is present.
- These wireless beacons are detected by the ESP1.
- In the event of an electrical power loss, RSP1 and RSP2 will go offline and will consequently stop transmitting the NPS beacon.
- In parallel, the generator or inverter will come online and will consequently provide back-up AC power to fixtures 5 and 7 via the transfer switch and the ESP1.
- ESP1 will not detect any NPS beacons and will consequently raise the light level of fixtures 5 and 7 to its maximum level and override any manual commands from the wallstation.

Service and Support

A WaveLinx system creates incredible value, from the cost savings of occupancy detection to the flexibility and power of scheduled lighting control.

To maximize the return on your lighting system investment, your WaveLinx system must perform at its peak.

We can help. With a network of experienced and skilled control specialists and a national presence, we can help with everything from system design, quote, implementation, and on-going maintenance.

Service Plans

Service Plans offer proactive, onsite, and remote diagnostics, configuration changes, training, and software/firmware updates typical of maintaining lighting control systems. Service Plans help facility managers and owners maintain their investment for optimal performance and maximum value.

- Prepaid, budgeted services, with coverage options for planned and unplanned visits.
- Fully customizable to meet your unique requirements
- Optimize your system as your building needs evolve
- Our Service Plans are available in single or multi-year arrangements and are customized to fit your exact needs. Cooper Lighting Solutions has two Service Plans designed to fit your service requirements and budget.

We offer:

**Field Project
Design Services**

Pre-Commissioning Support

Field Project Startup

Verification Walkthrough

**Optimization
Services**



SCAN
for more
Support & Services
information





Support

The services and support team simplifies design and specification. We're committed to supporting your project needs from design to occupancy and beyond.

Technical Support:

Phone:

+1 (800) 553-3879 (24/7 Support)

Email (US):

controltechsupport@cooperlighting.com



COOPER

Lighting Solutions

a  **signify** business

Why Cooper Lighting Solutions?

At Cooper Lighting Solutions, we build forward-thinking lighting solutions that make people's lives safer, while making buildings, homes and cities smarter and more sustainable. We deliver an industry-leading portfolio of residential, sports, infrastructure, industrial, and commercial LED lighting; plus lighting controls and smart lighting systems.

We question, we seek and we solve. Because building a better world means asking tough questions and pushing harder for answers. Together with our customers, we create solutions that build a better world. At Cooper Lighting Solutions, we push past the ordinary to build brighter.

Cooper Lighting Solutions is a business unit of Signify, the world leader in lighting. Together we have a shared purpose to unlock the extraordinary potential of light for brighter lives and a better world.



Lighting Brands

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
iO
Iris
Lumark
LumarkAP
Lumière
McGraw-Edison
Metalux
MWS
NeoRay
Portfolio
PrentaLux - 3D Printed Lighting
RSA
Shaper
Streetworks
Sure-Lites

Controls Brands

Greengate
Fifth Light
Intelligent Lighting Controls

**Connected Lighting Systems
and Smart Spaces Platform**

WaveLinx
Trellix Infrastructure



SCAN
for more
WaveLinx EM
information