



HALO Commercial

HC6

6-inch LED Downlight & Wall Wash

HC6

6-inch LED Downlight and Wall Wash

Versatile 6-inch commercial downlight optimized for lumen efficiency and optical performance. Reflectors offered in narrow, medium, wide distribution for efficiency in lumen delivery. Value priced and contractor installation friendly with emergency and connected lighting options available.



Standard Features

1. Housing Mounting Frame

- a. 6" Boat-shaped galvanized steel frames with die-formed aperture
- b. New construction or remodeling installation with boat shaped frame
- c. Plaster lip collar pre-set to 1/2" and adjusts for ceilings up to 1-1/2" thick

2. No Fuss Bar Hangers

- a. Pre-installed and centered mounting bars
- b. Bars lock to tee grid with screwdriver or pliers
- c. Centering marks on the bar bracket

3. Adjustable Mounting Brackets

- a. Bar brackets adjust 2" vertically from above the ceiling or through the aperture
- b. Brackets for use with the included "No Fuss" mounting bars or with 1/2" EMT
- c. Brackets are removable for remodel installation from below the ceiling

4. Junction Box

- a. Listed for (8) #12 AWG 90° C conductors (4-in/4-out)
- b. Listed for feed through branch wiring
- c. (3) 1/2" and (2) 3/4" trade size pry-outs
- d. Low voltage barrier section for 0-10V dimming wires
- e. (3) 4-port push wire nuts (1-port is fixture connection)

LED Modules




HM6 Low Lumen LED Module
For 1000, 1500, and 2000 lumen housings (mounting frames)




HM6 High Lumen LED Module
For 3000 and 4000 lumen housings (mounting frames)

The HC6 LED modules are available in a discrete selection of correlated color temperatures (CCT). The user can choose color temperatures 2700K, 3000K, 3500K and 4000K in 80 or 90 CRI.

Color temperature options



Lumen options

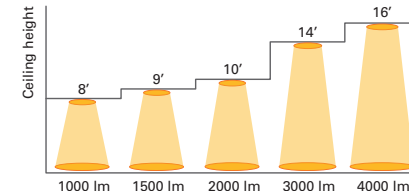

Nominal values for 15 - 20 footcandles at nadir.

Reflectors



Specular Clear



Semi-Specular (Haze)



White Baffle



Black Baffle



Black Baffle with Black Flange



White



Wall Wash



White Polymer (Dead Front)

Nominal beam distribution options*



narrow
55°



medium
60°



wide
65°

Beam Distribution*			
Code	Distribution	Spacing Criteria	Beam Angle
ND	Narrow	0.97	55°
MD	Medium	1.10	60°
WD	Wide	1.28	65°

* Nominal values may vary depending on selected CRI/CCT and reflector finish.

Connected Systems




WaveLinX Lite - WTK Tilemount Sensor


- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinX Lite Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinX system specifications for details




WaveLinX Lite WTK Tilemount Wiring Diagram

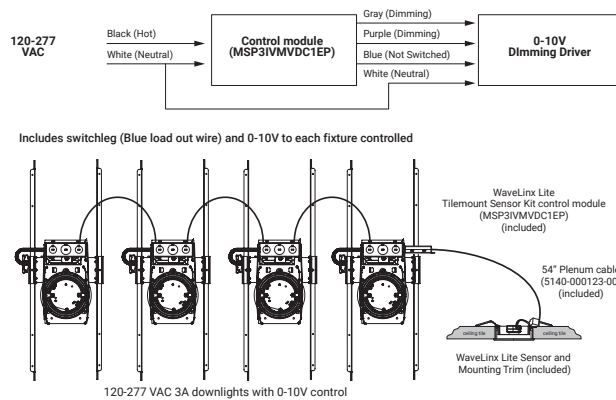

WaveLinX Lite Bluetooth Enabled System

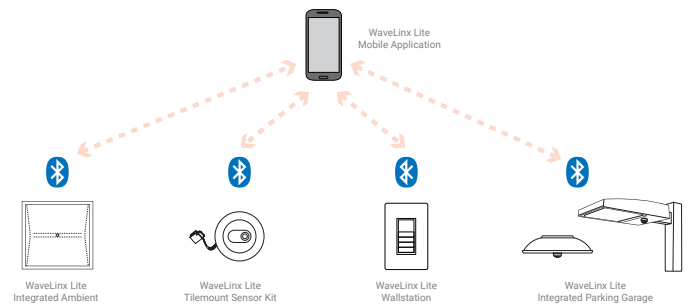


WaveLinX Wireless – WTA Tilemount Sensor




- WaveLinX Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations




WaveLinX mobile app settings

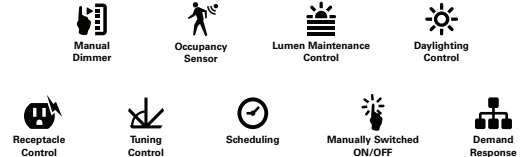


WaveLinX Lite WTA Tilemount Wiring Diagram

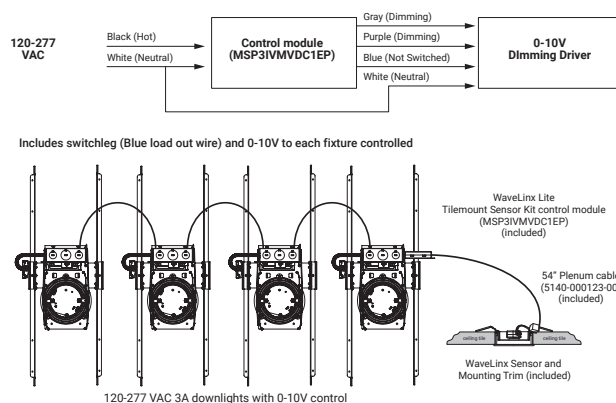

WaveLinX Wireless Trellix Building Management Integration

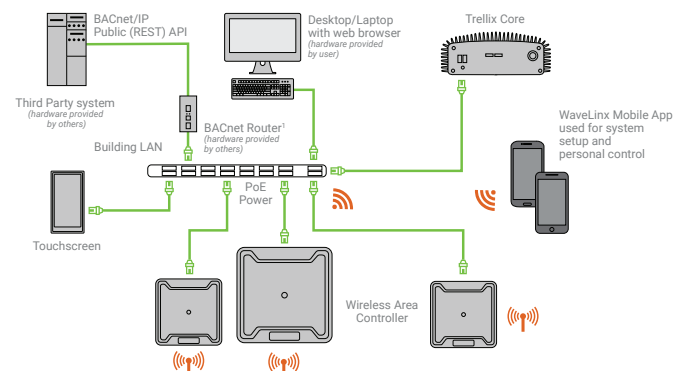

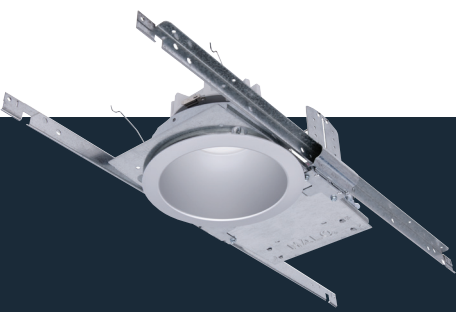

6" HC6 LED Downlight & Wall Wash

6-inch aperture LED downlight offered in narrow, medium, wide, and wall wash distributions ideal for general area lighting. Lumen options range from 1000 to 4000 lumens in color temperatures of 2700K, 3000K, 3500K, and 4000K; in 80 or 90CRI. Luminaire is airtight and can be installed in new construction or below the finished ceiling in remodeling applications. Intended for office spaces, healthcare, hospitality, and institutional uses.

Sample Number: HC620D010REM7 - HM612835 - 61MDC

A complete luminaire consists of a mounting frame, LED module, and reflector (order separately)

Mounting Frame	Lumens	Driver	Options ¹
HC6 = 6" new construction and remodeler frame HC6CP = 6" new construction and remodeler housing, CCEA Chicago Plenum rated	Fixed, Factory Set 10 = 1000 lumens (nominal), use with HM612 module 15 = 1500 lumens (nominal), use with HM612 module 20 = 2000 lumens (nominal), use with HM612 module 30 = 3000 lumens (nominal), use with HM634 module 40 = 4000 lumens (nominal), use with HM634 module	D010 =120-277VAC 50/60Hz 0-10V analog 1% - 100% dimming D010347 = 347VAC 50/60Hz 0-10V analog 1%-100% dimming (Canada only) 1 DLV =distributed low voltage dimming (1%-100%) driver ¹ For use with DLVP system only. Refer to DLVP system specifications for details.	REM7 = 7 watt emergency module with remote test / indicator light, use with D010 only REM14 = 14 watt emergency module with remote test / indicator light, use with D010 only IEM7 = integral 7 watt emergency module with integral test / indicator light, use with D010 only IEM14 = integral 14 watt emergency module with integral test / indicator light, use with D010 only BOD7ST = 7.5 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only WTA =Factory installed WaveLinX tile mount sensor Kit ⁵ WTK = Factory installed WaveLinX Lite Sensor Kit ⁶ REM7V = 7 watt emergency module with remote test / indicator light, use with DLV only ² REM14V = 14 watt emergency module with remote test / indicator light, use with DLV only ² IEM7V = integral 7 watt emergency module with integral test / indicator light, use with DLV only ² IEM14V = integral 14 watt emergency module with integral test / indicator light, use with DLV only ²

LED Module	Lumens	CRI/CCT	Accessories
HM6 = 6" LED module Use with 61 & 61PS series reflectors. Compatible with HC6 frames only.	12 =1000, 1500, 2000 lumens (nominal). For use with HC610*, HC615*, HC620* frames. 34 =3000, 4000 lumens (nominal). For use with HC630* and HC640* frames.	827 =80CRI / 2700K 830 =80CRI / 3000K 835 =80CRI / 3500K 840 =80CRI / 4000K 927 =90CRI / 2700K 930 =90CRI / 3000K 935 =90CRI / 3500K 940 =90CRI / 4000K	HB128APK = L channel hanger bar, 26", pair (replacement) RMB22 = Adjustable wood joist mounting bars, pair, extend to 22" long HSA6 =Slope Adapter for 6" Aperture Housings, Specify Slope (refer to instructions for installation of housing and trim) H347 = 347 to 120V step down transformer, 75VA H347200 = 347 to 120V step down transformer, 200VA WTA =Field installed WaveLinX tile mount sensor Kit ^{1,5} WTK = Field installed WaveLinX Lite Sensor Kit ^{1,6}

Notes:

1. Not available with CP version



2. ULus for U.S. only

5. WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - RealTime Location Services, use with D010 only

(Refer to WaveLinX system specifications)

6. WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)

Dimensions - HC6 Series

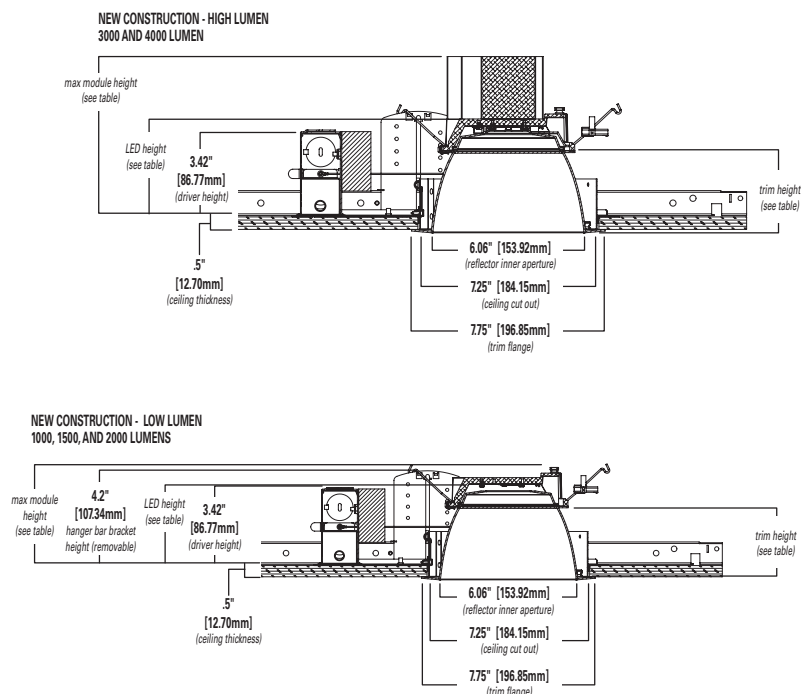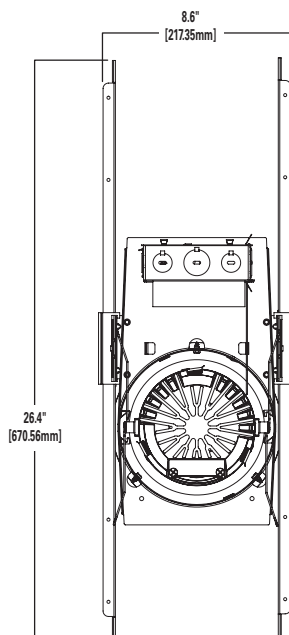



Precision formed 6-inch reflectors designed to deliver narrow, medium and wide beam distributions. A non-conductive polymer reflector may be used to meet 'dead-front' requirements.

Reflector	Beam Distribution ³	Finish	Flange	Accessories
61 = 6" conical reflector	ND = narrow 55° beam angle, 0.97 SC MD = medium 60° beam angle, 1.10 SC WD = wide 65° beam angle, 1.28 SC RWW = rotatable wall wash with linear spread lens	C = Specular clear H = Semi-specular clear (haze) W = Matte white (white flange)	Blank = Polished flange standard, C, H reflectors Blank = White flange standard, W reflectors WF = White flange option for C & H reflectors	61RWWPK = rotatable wall wash insert for 6" reflector, replacement part kit

Baffle	Beam Distribution ³	Finish	Flange	Accessories
61 = 6" baffle reflector	WD = wide 65° beam angle, 1.28 SC (nominal) RWW = rotatable wall wash with linear spread lens	BB =black baffle (white flange) WB =white baffle (white flange)	Blank = White flange standard, BB & WB BF = Black flange option available with BB	61RWWPK = rotatable wall wash insert for 6" reflector, replacement part kit

IEM Reflector	Beam Distribution ³	Finish	Flange	Integral Emergency
61 = 6" IEM reflector for integral emergency only	ND = narrow 55° beam angle, 0.97 SC MD = medium 60° beam angle, 1.10 SC WD = wide 65° beam angle, 1.28 SC	C = Specular clear H = Semi-specular clear (haze) W = Matte white (white flange)	Blank = Polished flange standard, C, H reflectors Blank = White flange standard, W reflectors WF = White flange option for C & H reflectors	IEM = Reflector for integral emergency only

IEM Baffle	Beam Distribution ³	Finish	Flange	Integral Emergency
61 = 6" IEM baffle for integral emergency only	WD = wide 65° beam angle, 1.28 SC (nominal)	BB =black baffle (white flange) WB =white baffle (white flange)	Blank = White flange standard, BB & WB BF = Black flange option available with BB	IEM = Reflector for integral emergency only

Reflector	Beam Distribution ³	Finish	Flange	
61PS = 6" non-conductive polymer 'dead-front' conical reflector ⁴	MD = medium 60° beam angle, 1.10 SC (nominal)	W = Matte white (white flange)	Blank = White flange on W reflector	

³. Values are nominal with specular clear reflector, other finishes and field results may vary. ⁴. 61PS reflector only available in Non-IC environments only, and up to 3000 lumens only.

Energy Data - HC6 Series

Nominal Lumens Model Number	1000 lumen HC610		1500 lumen HC615		2000 lumen HC620		3000 lumen HC630		4000 lumen HC640	
LED Module	Low Lumen Module		Low Lumen Module		Low Lumen Module		High Lumen Module		High Lumen Module	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Current (A)	0.085	0.042	0.119	0.055	0.176	0.082	0.228	0.102	0.345	0.15
Power (W)	10.1	10.9	14.2	14.9	21.1	21.4	27.2	27	41.3	40.7
In-rush (A)	0.644	1.95	0.212	0.85	0.588	0.624	0.898	1.7	1.05	2.23
In-rush Duration (ms)	0.125	0.24	0.28	0.32	0.3	0.38	0.36	0.38	0.32	0.34
THD (%)	8.6	15.6	7.8	16.3	8.8	11.2	9.7	9.3	10.06	14.01
PF ≥	≥ 0.90									
Minimum starting temperature	-40 C (-40 F)									


High Lumen (3000 & 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.6"	3.4"	3.8"
Medium	6.7"	3.5"	3.9"
Wide	6.5"	3.3"	3.7"
Baffle	6.5"	3.3"	3.7"

Low Lumen (1000, 1500 & 2000 Lumens)*

Max. Module Height	Trim Height	LED Height
4.5"	3.4"	3.8"
4.6"	3.5"	3.9"
4.4"	3.3"	3.7"
4.4"	3.3"	3.7"

*Max. height w/hanger bar bracket 4.2"

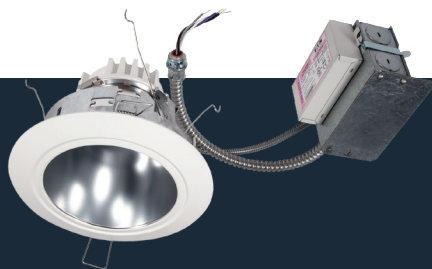

6" HC6R LED Retrofit Downlight

6-inch aperture LED retrofit downlight is designed for installation into other **6.625" (6-5/8") to 7.0" (7")** nominal aperture commercial housings. The retrofit reflector offered in medium distribution is ideal for general area lighting. Lumen packages range 1000 to 4000 lumens (nominal) in color temperatures of 2700K, 3000K, 3500K, and 4000K; in 80 or 90CRI. Installs from below the ceiling into existing open frame recessed housings. Applications include office spaces, healthcare, hospitality, and other institutional uses.

Sample Number: HC6R20D010 – HM6R12835 – 62RMDC

A complete luminaire consists of a mounting frame, LED module, and reflector (order separately)

Mounting Frame	Lumens	Driver	Options
HC6R = 6" retrofit kit for 6.625" (6-5/8") to 7.0" (7") nominal ceiling cutout aperture existing open frame commercial housings	Fixed, Factory Set 10 = 1000 lumens (nominal), use with HM412 module 15 = 1500 lumens (nominal), use with HM412 module 20 = 2000 lumens (nominal), use with HM412 module 30 = 3000 lumens (nominal), use with HM434 module 40 = 4000 lumens (nominal), use with HM434 module	D010 =120-277VAC 50/60Hz 0-10V analog 1% - 100% dimming D010347 = 347VAC 50/60Hz 0-10V analog 1%-100% dimming (Canada only)	REM7 = integral 7 watt emergency module with remote test / indicator light, for use with D010 only REM14 = integral 14 watt emergency module with remote test / indicator light, for use with D010 only BOD7ST = 75 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only WTA =Factory installed WaveLinX sensor Kit ¹ WTK = Factory installed WaveLinX Lite Sensor Kit ²

LED Module	Lumens	CRI/CCT	Accessories
HM6R = 6" retrofit module for use for use HC6R and HC56R series retrofit kits and 62R trims only	12 =1000, 1500, 2000 lumens (nominal) Use with HC6R10*, HC6R15*, HC6R20*, HC56R10*, HC56R15*, HC56R20* mounting frames, and 62R trims only 34 =3000, 4000 (nominal) For use with HC6R30*, HC6R40*, HC56R30*, HC56R40* mounting frames, and 62R trims only	827 =80CRI / 2700K 830 =80CRI / 3000K 835 =80CRI / 3500K 840 =80CRI / 4000K 927 =90CRI / 2700K 930 =90CRI / 3000K 935 =90CRI / 3500K 940 =90CRI / 4000K	H347 = 347 to 120V step down transformer, 75VA H347200 = 347 to 120V step down transformer, 200VA sensor kit, for use with D010 driver only WTA = Field installed WaveLinX sensor Kit ¹ WTK = Field installed WaveLinX Lite Sensor Kit ²

Reflector	Beam Distribution	Finish	Flange
62R = 6" retrofit conical reflector for use HC6R and HC56R series retrofit kits only	MD = medium 55° beam angle, 1.04 SC	C = Specular clear H = Semi-specular clear (haze) W = Matte white (white flange)	Blank = Polished flange on C, H reflectors Blank = White flange on W reflectors WF = White flange option for C & H reflectors

Notes:

1. WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - RealTime Location Services, use with D010 only (Refer to WaveLinX system specifications)
2. WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)

Retrofit Reflectors



Specular Clear



Semi-Specular (Haze)



Matte White




Specular Clear
with White Flange





Semi-Specular (Haze)
with White Flange


Dimensions - HC6R Series

RETROFIT - LOW LUMEN
1000, 1500, AND 2000 LUMENS

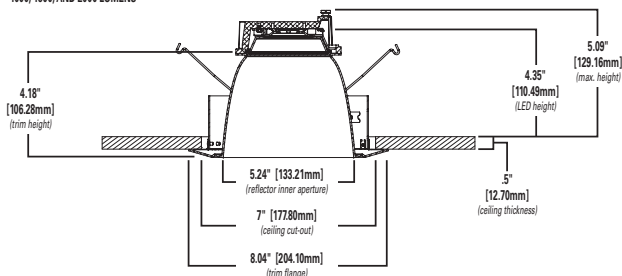

RETROFIT - HIGH LUMEN
3000 AND 4000 LUMENS

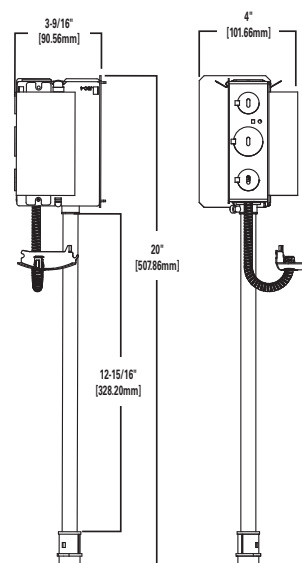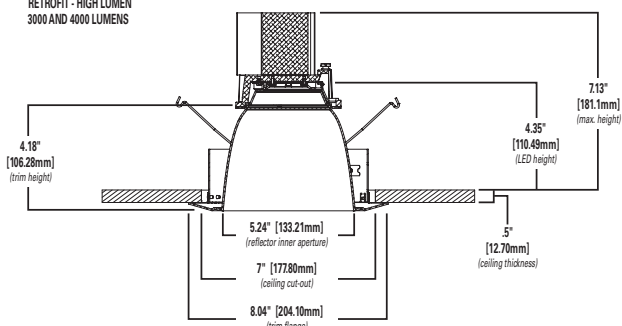

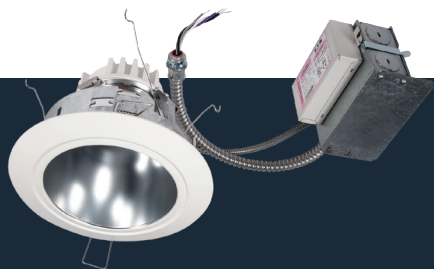

6" HC56R LED Retrofit Downlight

6-inch aperture LED retrofit downlight is designed for installation into other **5.875" (5-7/8") to 6.625" (6-5/8")** nominal aperture commercial housings. The retrofit reflector offered in medium distribution is ideal for general area lighting. Lumen packages range 1000 to 4000 lumens (nominal) in color temperatures of 2700K, 3000K, 3500K, and 4000K; in 80 or 90CRI. Installs from below the ceiling into existing open frame recessed housings. Applications include office spaces, healthcare, hospitality, and other institutional uses.

Sample Number: HC6R20D010 – HM6R12835 – 62RMDC

A complete luminaire consists of a mounting frame, LED module, and reflector (order separately)

Mounting Frame	Lumens	Driver	Options
HC56R = 6" retrofit kit for 5.875" (5-7/8") to 6.625" (6-5/8") nominal ceiling cutout aperture existing open frame commercial housings	Fixed, Factory Set 10 = 1000 lumens (nominal), use with HM412 module 15 = 1500 lumens (nominal), use with HM412 module 20 = 2000 lumens (nominal), use with HM412 module 30 = 3000 lumens (nominal), use with HM434 module 40 = 4000 lumens (nominal), use with HM434 module	D010 =120-277VAC, 50/60Hz, 0-10V 1% -100% dimming	REM7 = integral 7 watt emergency module with remote test / indicator light, for use with D010 only REM14 = integral 14 watt emergency module with remote test / indicator light, for use with D010 only BOD7ST = 7.5 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only WTA =Factory installed WaveLinX sensor Kit ¹ WTK = Factory installed WaveLinX Lite Sensor Kit ²

LED Module	Lumens	CRI/CCT	Accessories
HM6R = 6" retrofit module for use for use HC6R and HC56R series retrofit kits and 62R trims only	12 =1000, 1500, 2000 lumens (nominal) Use with HC6R10*, HC6R15*, HC6R20*, HC56R10*, HC56R15*, HC56R20* mounting frames, and 62R trims only 34 =3000, 4000 (nominal) For use with HC6R30*, HC6R40*, HC56R30*, HC56R40* mounting frames, and 62R trims only	827 =80CRI / 2700K 830 =80CRI / 3000K 835 =80CRI / 3500K 840 =80CRI / 4000K 927 =90CRI / 2700K 930 =90CRI / 3000K 935 =90CRI / 3500K 940 =90CRI / 4000K	H347 = 347 to 120V step down transformer, 75VA H347200 = 347 to 120V step down transformer, 200VA sensor kit, for use with D010 driver only WTA = Field installed WaveLinX sensor Kit ¹ WTK = Field installed WaveLinX Lite Sensor Kit ² HL6RSMF = 6" aperture new construction mounting frame with integral wood & T-grid bar hangers, adjust for 8" to 24" wide

Reflector	Beam Distribution	Finish	Flange
62R = 6" retrofit conical reflector for use HC6R and HC56R series retrofit kits only	MD = medium 55° beam angle, 1.04 SC	C = Specular clear H = Semi-specular clear (haze) W = Matte white (white flange)	Blank = Polished flange on C, H reflectors Blank = White flange on W reflectors WF = White flange option for C & H reflectors

Notes:

1. WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - RealTime Location Services, use with D010 only (Refer to WaveLinX system specifications)

2. WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)

Retrofit Reflectors



Specular Clear



Semi-Specular (Haze)



Matte White




Specular Clear
with White Flange





Semi-Specular (Haze)
with White Flange

Dimensions - HC56R Series

RETROFIT - LOW LUMEN
1000, 1500, AND 2000 LUMENS

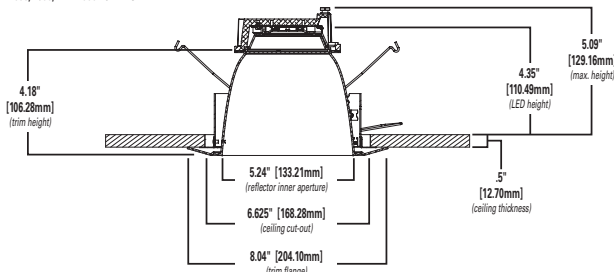

RETROFIT - HIGH LUMEN
3000 AND 4000 LUMENS

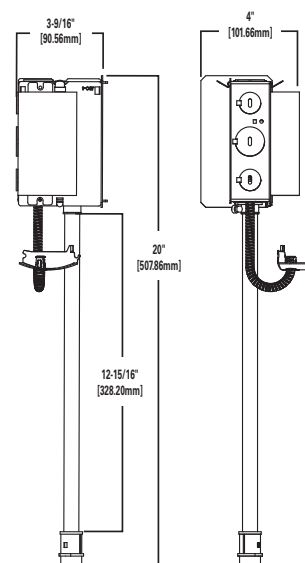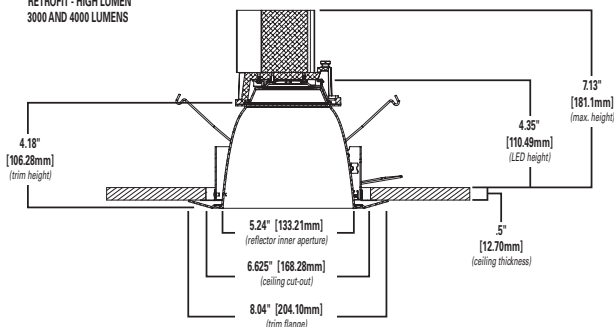

Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
io
IRiS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Controls Product Lines

Greengate

Connected Lighting Systems

Fifth Light (Canada Only)
HALO Home
WaveLinx

IoT Platform


Trellix



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR517009EN
April 13, 2021 3:53 PM



All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.