

GPCS – Patient Control Station

Catalog#	Prepared by
Project	Date
Comments	Type

Overview

The Greengate Patient Control Station provides the hospital patient or nursing home resident easy control over their lighting controls and shades, with the added security of a standard connection to the Nurse Call system and the comfort of a universal TV controller. The patient control station provides large, clearly labeled buttons in a fully sealed case

Features

- Provides patients access to control natural and electric lighting from the bed
- Incorporates lighting and shade control buttons with Nurse Call, TV and other features
- Reduces nuisance calls to the nursing staff by providing patient control of in room lighting and shades
- Proprietary sealed design reduces potential risk of infectious fluids or solids settling into the unit, even in the speaker area
- Durable, lightweight universal handheld control with comfort grip case
- Large button layout
- 37 pin connection standard
- Designed to withstand over 100 drops onto a concrete floor without impacting functionality
- RoHS compliant



*Model GPCS-3Z-DIM shown

Specifications

Size	8.375"H x 3.5"W x 1.5"D
Housing	Durable injection-molded ABS plastic complies with UL 94V-0
Switch Rating	30 VDC, 500mA or less
Switch Type	SPDT, Momentary contact
Tested With the Following Nurse Call Stations	GE Telligence™
	Hill-Rom NaviCare®
	Rauland Responder® IV
	Rauland Responder® 5
Standards	West-Com Novus®
	UL 1069 Listed

Description/Operation

The Greengate Patient Control Station provides the hospital patient or nursing home resident easy control over their lighting controls and shades, with the added security of a standard connection to the Nurse Call system and the comfort of a universal TV controller. The patient control station provides large, clearly labeled buttons in a fully sealed case.

Installation

This system accessory will require mounting and wiring at the site. The patient control station then plugs into this receptacle, connecting it to the nurse call system and the healthcare television.

Configuration

GPCS-3Z



GPCS-3Z-DIM



GPCS-2Z



GPCS-2Z-DIM




GPCS-2Z-SHD



GPCS-2Z-SHD-DIM



Sample One-Line

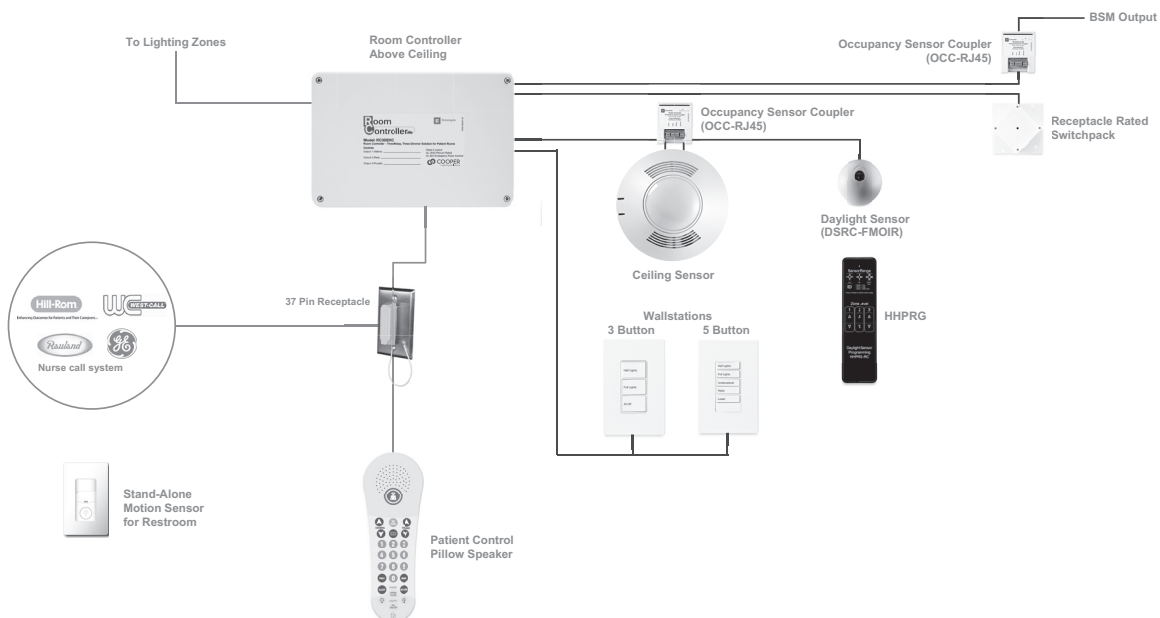

Ordering

This is an accessory for the Greengate Room Controller (RC3DEHC) and ControlKeeper 4A lighting control panels. There is no factory assembly needed.

Catalog #	Description
GPCS-3Z	Patient Control Station, 3 Zones, All On/All Off button
GPCS-3Z-DIM	Patient Control Station, 3 Zones, All On/All Off button, Dim raise/lower buttons
GPCS-2Z	Patient Control Station, 2 Zones, All On/All Off button
GPCS-2Z-DIM	Patient Control Station, 2 Zones, All On/All Off button, Dim raise/lower buttons
GPCS-2Z-SHD	Patient Control Station, 2 Zones, All On/All Off button, Shade raise/lower button
GPCS-2Z-SHD-DIM	Patient Control Station, 2 Zones, All On/All Off button, Shade raise/lower button, and Dim raise/lower buttons

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. ACC131703
September 23, 2014

Cooper Lighting Solutions is a
registered trademark.

All other trademarks are
property of their respective
owners.