

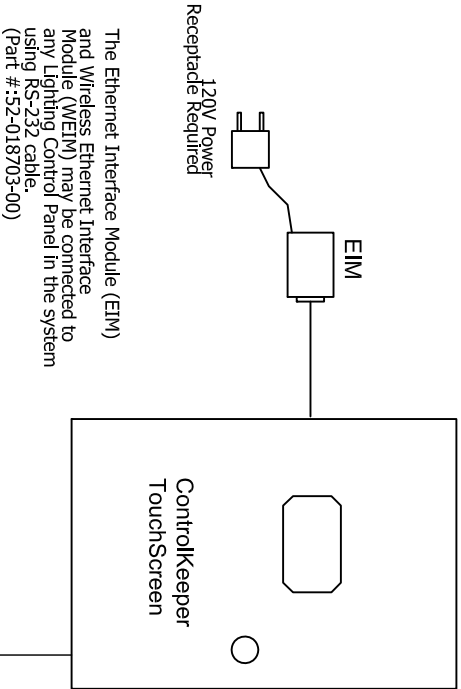
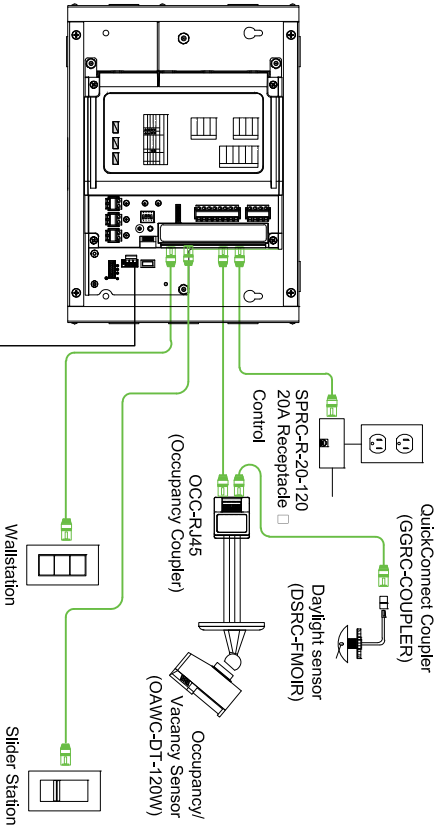


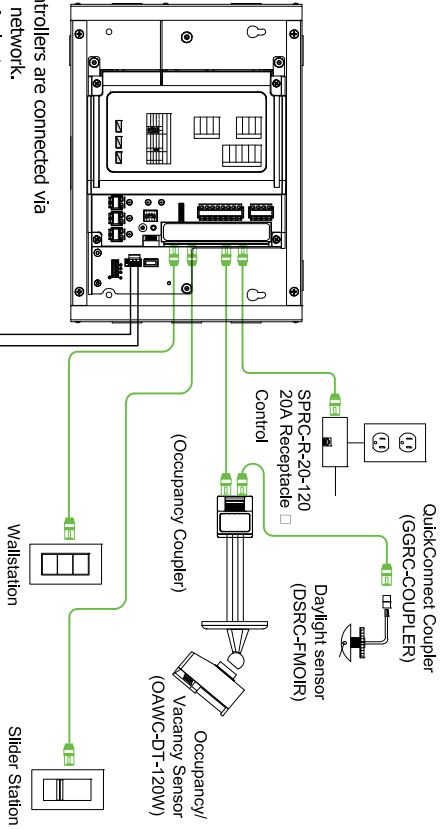

The Ethernet Interface Module (EIM) and Wireless Ethernet Interface Module (WEIM) may be connected to any Lighting Control Panel in the system using RS-232 cable. (Part #:52-018703-00)

Networked Room Controllers are connected via daisy-chained RS-485 network. i.e. Beldin 9841 or equivalent (Part # GG9841 Standard/GG9841 Plenum)

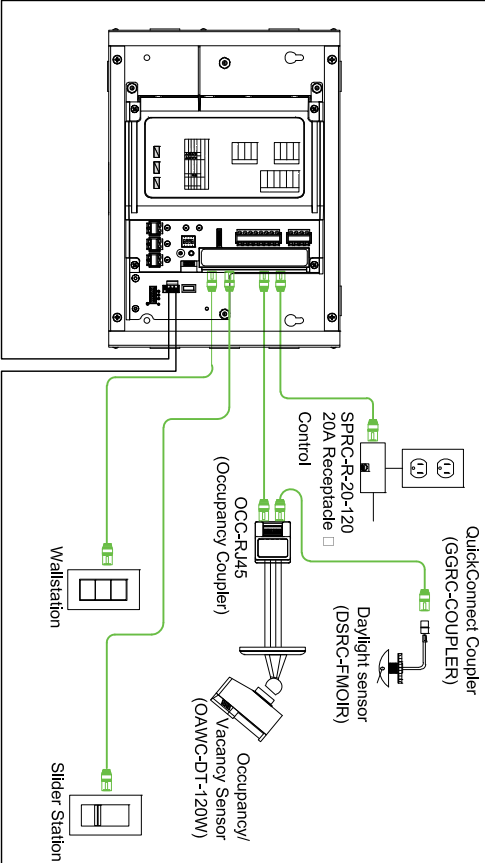

Room Controller and Smart Devices use Click & Go technology.

The Room Controller will automatically recognize any smart devices connected with the quick connect cable (provided) and start working immediately upon power up with no programming required. The Room Controller defaults to Manual On/Automatic Off vacancy sensor mode for maximum energy savings. Wallstations buttons can toggle zones or trigger preset scenes and can be mixed within each wallstation.

ROOM CONTROLLER WIRING DIAGRAM				Eaton			
TITLE: LIGHTING CONTROLS Network Topology				THE INFORMATION ON THIS DRAWING IS THE PROPERTY OF Eaton Corporation. IT IS DISCLOSED IN CONFIDENCE AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM.			
DRAWN: JAL		DATE: 8/16/14		PROJ:		DWG #:	
CHKD: X.X.		SCALE: NTS		SHEET: 1/1		E3	
APPR: X.X.		SIZE:		DATE		REV	
						DESCRIPTION	
						BY	