Project	Catalog #	Туре	
Prepared by	Notes	Date	



# Metalux

### 14RTC

1' x 4' LED Troffer General Recessed LED Troffer For Use in Insulated Ceilings

#### **Typical Applications**

- · Commercial Office Spaces · Schools · Healthcare
- Retail Merchandising Areas

## Interactive Menu

- Order Information page 2
- Photometric Data page 3
- Control Solutions page 3
- Connected Systems page 3
- · Product Warranty

### **Product Certification**







### **Product Features**









### **Top Product Features**

- Shallow plenum under 2.5" deep RTC fits the most challenging spaces
- Standard and high lumen models up to 7000 lumens
- Up to 133 lumens per watt delivering up to 56% energy savings
- · Stock and MTO SKU available in 3500K and 4000K
- · UNV driver and 0-10V dimming standard

## **Dimensional and Mounting Details**



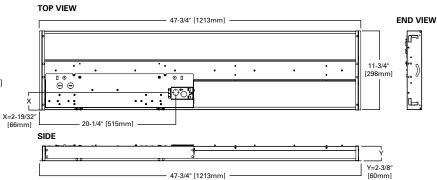

#### **Stock SKU and Rated Performance**

					Dellerand			Input cu	rrent (A)
	Catalog Number	UPC	CRI (Min)	сст	Delivered Nominal Lumens *	Watts **	Efficacy (Im/W)	120V	277V
	14RTC3435	080083802562	80	3500K	3571	28.2	127	0.25	0.11
Ī	14RTC3440	080083802579	80	4000K	3643	27.7	131	0.25	0.11

<sup>\*</sup> Lumens without sensor. Reduce lumens by 2% with sensors installed.

<sup>\*\*</sup> Watts of standard 0-10V product.



Metalux 14RTC LED

### **Order Information**

#### SAMPLE ORDER NUMBER: 14RTC-34-UNV-EL14W-L835-HCD-SWPD1-U

Size	Series	Lumen	Voltage	Options	Emergency	Factory Wiring
Size	Series (1)	Lumen (2)	Voltage	Options	Emergency	Factory Wiring
<b>14</b> =1' x 4'	RTC=Recessed Center Lensed Troffer	<b>34</b> =3400 Lumens	UNV=Universal Voltage 120-277 347=347 Volt 120V=120 Volt (8) 277V=277 Volt (8)	GL=Single Element Fuse GM=Double Element Fuse	EL7W=7-watt, 120V-277V emergency battery pack installed (3) EL14W=14-watt 120V-277V emergency battery pack installed (3) GTRZ=Bodine Generator Transfer Relay (4),(8) ETRD=Emergency Transfer Relay with dimming control (4)	[Blank]=No Flex A3/8-4/18GDIM=3/8" Flex with 0-10V Dimming Leads A3/8-2/18GDIM=Flex with line and common A3/8-5/18GDIM=Flex with 0-10V Dimming leads and Blue for alternate wiring See below for details.
	Notes	Notes	Notes		Notes	Flexible Metal Conduit Options
	(1) DesignLights Consortium® Qualified and classified for both DLC Standard and DLC Premium, refer to www. designlights.org for details.	(2) Nominal lumen output. See table for actual values.	(8) Must specify voltage as 120V or 277V when ordering GTR2 option.		(3) With integral test switch/indicator/laser test. For approximate delivered lumens multiply the lumens per watt of the desired fixture by the wattage of the emergency battery pack (100 lm/W x 7=700 lumens). (4) Used to bypass local control during outage. Must be used in conjunction with UL 1008 device (provided by others). GTR2 option includes 2 relays on fixtures with dimming drivers. ETR0 potion only requires one relay when used on a dimming fixture. (8) Must specify voltage as 120V or 277V when ordering GTR2 option.	Flex options available for 0-10V dimming control, DALI dimming control, emergency and night light functions. 72-inch factory-installed and pre-wired to driver, fitted to luminaire housing access plate with 90° enclosed FMC connector. Not all options may be combined and installation ratings vary by type.  A3/8-4/18GDIM series notes: Factory installed dimming option 3/8° flexible metal conduit with 2#18 power and ground wires and 2.#18 UL-listed jacketed 0-10V +/- control wires. Meets UL 66, 83, 1479, 1569, 1581, 2556. NEC® 250.118, 300.22(C), 392, 396, 330, 501, 502, 503, 530, 504, 505, 518, 520, 530, 645, 72; Federal Specification A-8-9544 (formerly J-C-30B); all applicable OSHA and HUD Requirements. UL Classified 1, 2, and 3-hour through penetration with applicable fire stop product (not included). May be surface mounted, fished and/or embedded in plaster. Cable tray and approved raceway rated, install per NEC®; Environmental Air-Handling Space Installation per NEC® 300.22(C).

CRI/CCT	Driver Type	Sensor	Packaging	Accessories
CRI/CCT	Driver Type	Sensor	Packaging	Accessories (order separately)
<b>L835</b> =80 CRI/3500K <b>L840</b> =80 CRI/4000K	CD=0-10V Dimming Driver (10% - 100% Dimming) HCD=0-10V Dimming Driver (1% - 100% Dimming) SR=Sensor Ready (5% - 100% Dimming) L5=Lutron 5 Series (LDE5) (5) LH=Lutron with Soft On, Fade to Black (LDE1) (5)	[Blank]=No Sensor WAA=WaveLinx Wireless Integrated Sensor (A) SVPD1=0-10V Stand-alone Integrated Sensor (D)	U=Unit carton PALC=Palletized with carton	RTCEQ=EQ Grid Clip (%). (7) DF-14W-U=1' x 4' Drywall Frame Kit SK-14-WT=1' x 4' Tall Surface Mount Kit ISHH-01=Programming Remote for SVPD1 Integrated Sensor ISHH-02=Personal Control Remote for SVPD1 Integrated Sensor 14RTCRLENS=1' x 4' Replacement Lens (full) 14RTCRLENSIOT=1' x 4' Replacement Lens (with sensor)
	Notes	Notes		Notes
	(5) Refer to Lutron supplement (PS519148EN) on website. Must use UNV voltage option.	Integrated options must be used in conjunction with the associated system and may not be compatible with other options or accessories. Please refer to the following: (A) Consult WaveLinx system pages for additional details and compatibility. (D) Consult SVPD series system pages for additional details and compatibility.		(6) An EQ Grid Clip is recommended for all 9/16" ceiling systems. (7) Order one set for every fixture (4 clips per kit).

### **Product Specifications**

#### Construction

- · 2-1/2" housing constructed of die-formed, code gauge cold rolled steel
- · Full length die-formed stiffeners and unibody endplate for added strength
- · Four auxiliary fixture end suspension points provided
- Wireway cover removable without tools
- · Endplates provided with Grid-Lock feature for safety

#### **Integrated Controls**

- · 0-10V dimming to 10% standard
- · Optional 1% dimming is available
- . WaveLinx wireless sensor compatible for connected and IoT capability
- · SVPD sensor compatible for standalone
- functionality
- DALI 2.0, Lutron, and step-dimming available

#### **LED and Light Engine**

- LED's available in 3500K or 4000K at 80 CRI minimum
- TM21 life at 60,000 hours up to L75
- · Drivers available in 120-277V and 347V
- 1% dimming available as well as alternate controls

#### **Emergency Battery Options**

- Optional 120-277V emergency battery available in 7W or 14W
- · 90-minute backup period for code compliance
- · Test switch with laser pointer and testing from floor feature for ease of use
- EZ Key feature prevents accidental discharge during construction
- · Generator transfer options available

- · Multistage, iron phosphate pretreatment
- · 90% reflective, matte white enamel finish
- · Full fixture housing painted after fabrication

### **Compliance**

- · IC rated for insulation contact
- · cULus listed for damp locations
- · RoHS compliant
- Tested to IESNA LM-79 and LM-80
- · Stated life tested to TM21 standards
- · Can be used for State of California Title 24 high efficacy luminaire
- · NEMA 410 compliant

#### Warranty


· Five-year warranty standard.



Metalux 14RTC LED

### **Photometric Data**



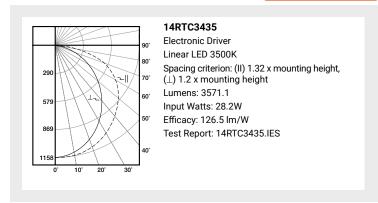

## **←** Control Systems

- · WaveLinx Wireless
- WaveLinx Wired
- · WaveLinx Lite
- DLVP
- VividTune



## **Energy and Performance Data**

#### **CCT Table**

Approximate Color Temperature Multiplier				
3500K	1.0			
4000K	1.02			

#### **Load Data**

Thd	11%
Power Factor	0.96
Weight	7.8 lbs.
Low Temp Start	-20°C

### **Shipping Data**

Size	Wt.	Pallet (30"x 53")		
1x4	10.4 lbs.	13		



Cooper Lighting Solutions 1121 Highway 74 South Peachtree City, GA 30269 P: 770-486-4800 www.cooperlighting.com