


|             |  |           |  |      |  |
|-------------|--|-----------|--|------|--|
| Project     |  | Catalog # |  | Type |  |
| Prepared by |  | Notes     |  | Date |  |

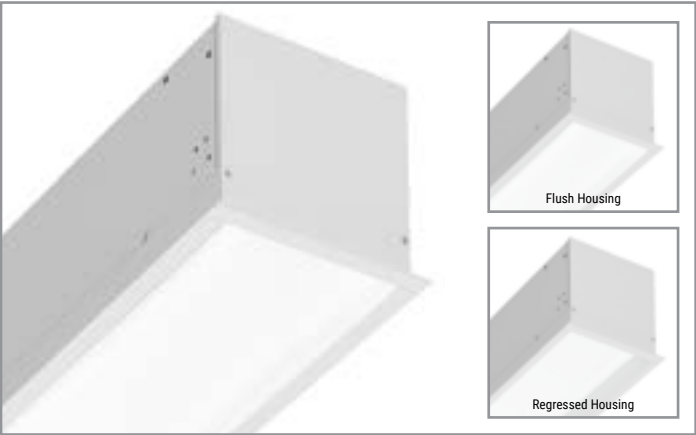

# Neo-Ray

## Define 5

LED  
Recessed  
Direct

### Typical Applications

Office • Education • Healthcare • Hospitality • Retail

### Product Certification



### Product Features




### Interactive Menu

- Order Information page 2
- Shielding Options page 3
- Photometric Data page 4
- Integrated Sensor Details page 6
- VividTune page 7

### Top Product Features

- Flush, 1" regressed and 3" regressed housings available as standard
- Specifiable to the nearest 1" in length
- Satin Lens, Asymmetric Lens and Drop Lens available
- Customizable lumen packages
- Precision extended trims fit a variety of different architectural ceiling types
- Industry leading performance and efficacy
- [Standard and custom corners / transitions available](#)
- Options to meet Buy American Act requirements

### Dimensions

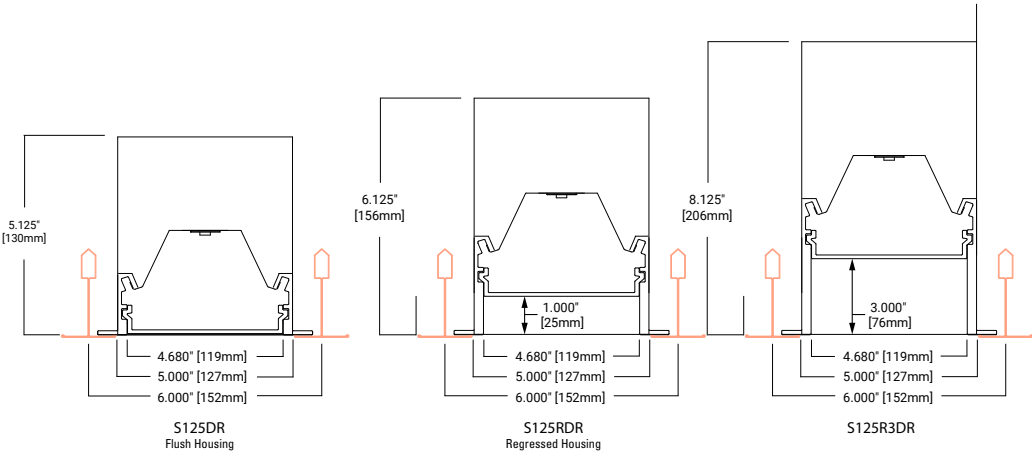

 additional  
product diagrams

## Order Information

SAMPLE ORDER NUMBER: **S125DR-S850D840-ETG4F0-1B1-UDD-F-W-SWPD1**

**Icon Key:** Grey bar denotes available with 10-Day Quick Ship  
 ∅ Consult factory for availability

| Domestic Preference  | Light Distribution  | Light Engine  | Lumen Package Down   | CRI   | LED CCT  | Ceiling Type  | Length  | Circuiting                                |
|--|---|---|--|---|--|---|---|---|
| Domestic Preference  | Light Distribution  | Light Engine  | Lumen Package Down   | CRI   | LED CCT  | Ceiling Type  | Length  | Circuiting                                |
| [Blank]=Standard<br>BAA=Buy American Act   | S125DR=Define 5 Direct Recessed<br>S125RDR=Define 5 Regressed Direct Recessed<br>S125R3DR=Define 5 Regressed Direct Recessed<br>QS-S125DR=Define 5 Direct Recessed Quick Ship   | -S=Standard<br>-H=High Performance<br>-V=VividTune  | 375D=375 Lms/ft<br>610D=610 Lms/ft<br>850D=850 Lms/ft<br>1090D=1090 Lms/ft<br>1270D=1270 Lms/ft<br>____D=Custom Lms/ft   | 8=80<br>9=90  | 27=2700K<br>30=3000K<br>35=3500K<br>40=4000K<br>50=5000K<br>2765=2700K-6500K<br>3050=3000K-5000K   | -ETG=15/16" T-Grid<br>-FTG=9/16" T-Grid<br>-STG=9/16" Slot T-Grid<br>-FTT=9/16" Tegular T-Grid<br>-ITG=9/16" Interlude T-Grid<br>-ETT=15/16" Tegular T-Grid<br>-GYP=Gypsum board<br>-FSR=Mud-in Gypsum Board<br>-FES="Finished" Extruded Side | 2F0=2' Individual<br>4F0=4' Individual<br>8F0=8' Individual<br>12F0=12' Individual<br>__F0=4' Incremental Run (e.g. 40F0 = 40' 0")<br>__F=1' Incremental Run (e.g. 21F3 = 21' 3") | -1=Single Circuit<br>-S=Secondary Circuit |
| Notes  | Notes   | Notes   | Notes  | Notes   | Notes  | Notes   | Notes   | Notes                                     |
| Only product configurations with this designated prefix are built to be compliant with the Buy American Act of 1933 (BAA). Please refer to <a href="#">Domestic Preferences</a> website for more information. Components shipped separately may be separately analyzed under domestic preference requirements. | RDR regress of 1" will add an additional 1" to fixture depth.<br><br>R3DR regress of 3" will add additional 3" to fixture depth.<br><br>3" regressed only available in GYP, ETG and FTG ceiling types.<br><br>For FSR, FES, ETT ceiling types please consult factory for extended leadtime. | See performance table for add'l details. Light engine must be consistent across run length. | 3500K/80CRI/DR housing/F Lens. Please refer to scaling data for other variables. For custom lumen output, please refer to additional information on page 4. VividTune available with 850D, 1090D, and 1270D. | Additional lead-time and cost may apply for 927, 930, 935 and 940 configurations. 2700K not available in 80CRI.<br><br>2765 & 3050 VividTune configurations require V light engine, 90 CRI, and W2A driver. | Please refer to ceiling interface diagrams for additional detail and dimensions.<br><br>3" regressed only available in GYP, ETG and FTG ceiling types. |   | Secondary circuit similar to A/B switching. Price adder applies for "S" configuration.<br><br>VividTune Secondary Circuit has shared CCT wiring.                                  |   |

| Emergency   | Voltage   | Integral LED Driver   | Shielding Down  | Options   | Color  | Integrated Sensor   |
|---|---|---|---|---|--|---|
| <b>E</b> =Emergency circuit<br><b>B1</b> =7W UNV integral battery<br><b>B2</b> =14W UNV integral battery<br><b>B3</b> =6W UNV Integral<br><b>T</b> =UL924 EPC Emergency Bypass Relay  | - <b>U</b> =UNV 120-277V<br>- <b>1</b> =120V<br>- <b>2</b> =277V<br>- <b>3</b> =347V<br>- <b>4</b> =48VDC ∅ | <b>DD</b> =0-10 Volt Dimming, 1%<br><b>SL</b> =DALI Dimming, 1%-100%<br><b>LH</b> =Lutron LDE1 w/ecosys<br><b>LV1</b> =DLVP ∅<br><b>W2A</b> =White Tuning, 0-10V Dimming (VividTune only) | - <b>F</b> =Satin Flush Diffuser<br>- <b>A</b> =Asym Flush Optic<br>- <b>D</b> =Satin Drop Diffuser | - <b>CP</b> =Chicago Plenum<br>- <b>R</b> =GLR Fuse (Fast)<br>- <b>F</b> =GMF Fuse (Slow) | - <b>W</b> =Matte White<br>- <b>S</b> =Silver<br>- <b>B</b> =Black<br>- <b>C</b> =Custom Color ∅ | - <b>WAA</b> =WaveLinX Pro Integral<br>- <b>WTA</b> =WaveLinX Pro Tilemount<br>- <b>WAB</b> =WaveLinX Lite Integral ∅<br>- <b>WTB</b> =WaveLinX Lite Tilemount ∅<br>- <b>LWIPD1</b> =Enlightened Integral<br>- <b>LWTPD1</b> =Enlightened Tilemount<br>- <b>SVDPD1</b> =Standalone Sensor<br>- <b>SVTPD1</b> =Standalone Sensor Tilemount |
| <b>Notes</b><br>Internal battery standard for fixtures ≥ 4ft and lumen output ≤1270 Lms/ft. Fixture Non-IC. Rated for internal battery and lumen output ≥1090 Lms/ft. External battery standard with fixtures <4ft and all Chicago plenum fixtures. | <b>Notes</b><br>48V for use with LV1 driver. 347V only available with DD driver.                            | <b>Notes</b><br>DD driver is standard. For non-dimming applications, the driver will default to full brightness if no connection is made to the capped dimming wires in the field.        | <b>Notes</b><br>All lensing options are snap-in lenses.<br>A option not available with VividTune.   | <b>Notes</b>  | <b>Notes</b>   | <b>Notes</b><br>Please refer to page 6 for additional detail required to specify integrated or tile-mount sensors. Integral option not available with regressed, drop or asymmetric configurations. Tilemount configuration recommended for these applications.   |

| Integral Downlight                         | Downlight Qty- Each End        | Lumen Levels / Distribution ∅ / Optic  | Driver  | Downlight CRI/CCT∅  | Aperture Shape                        |
|--|--------------------------------|--|---|---|---------------------------------------|
| <b>EU28</b> =Fixed 2" Universal LED Module | <b>1</b> =1 Downlight Each End | <b>05SP15</b> = 500 lumen 15° IC Rated<br><b>10SP15</b> = 1000 lumen 15° IC Rated<br><b>0510NFL25</b> = 500 and 1000 lumen 25° IC Rated<br><b>0510FL40</b> = 500 and 1000 lumen 40° IC Rated<br><b>0510WFL55</b> = 500 and 1000 lumen 55° IC Rated<br><b>15NFL25</b> = 1500 lumen 25° Non IC Rated<br><b>15FL40</b> = 1500 lumen 40° Non IC Rated<br><b>15WFL55</b> = 1500 lumen 55° Non IC Rated<br><b>20NFL25</b> = 2000 lumen 25° Non IC Rated<br><b>20FL40</b> = 2000 lumen 40° Non IC Rated<br><b>20WFL55</b> = 2000 lumen 55° Non IC Rated | <b>D010</b> =0-10V Dimming, 1% to 100%, 120V-277V ∅                   | <b>924</b> = 2400K, 90CRI<br><b>927</b> = 2700K, 90CRI<br><b>930</b> = 3000K, 90CRI<br><b>935</b> = 3500K, 90CRI<br><b>940</b> = 4000K, 90CRI | <b>R</b> = Round<br><b>S</b> = Square |
| <b>Notes</b>                               | <b>Notes</b>                   | <b>Notes</b><br>Nominal Lumens will vary depending on selected distribution, color, driver and reflector finish.   | <b>Notes</b><br>Please consult factory for additional driver options. | <b>Notes</b><br>Please consult factory for additional CRI options.  | <b>Notes</b>                          |

## Product Specifications

### Construction

- Available in Flush and Regressed Housing
- Precision cut housing trim extruded from 6063 aluminum with aluminum frame
- Extruded end-caps ensure a precise and uniform ceiling interface
- Nominal 2' -12' illuminated sections used in run configuration and/or individual fixtures

### Finish

- Electrostatically applied polyester powder coat paint

### LED Module

- Modular LED tray assembly comprising reflector, light engine, led driver and quick disconnect wire-harness for ease of installation and maintenance over the life of the luminaire

### Light Engine

- Offered with three next generation Neo-Ray light engines delivering industry leading efficacy and long-life
- LED's are available in 2700K, 3000K, 3500K, 4000K or VividTune ranges of 2700K-6500K and 3000K-5000K
- CRI options of either  $\geq 80$  CRI or  $\geq 90$  CRI (Lumen output will be affected - please refer to the lumen adjustment factor table)

### LED Drivers

- LED system coupled with electrical driver
- Traditional electronic drivers are available for 120-277V and 347V applications
- Cooper Lighting Solutions's DLVP Low voltage drivers are available for 48VDC applications

### Controls and Integrated Sensors

- Equipped standard with a 0-10V continuous dimming driver. Compatible with most standard dimming devices
- Additional control types are available (DALI, Lutron, DLVP) at an additional cost
- WaveLinx and Enlighted wireless sensors as well as stand-alone sensors available

### Mounting

- Recessed

### Lengths

- Available in any length (23" min) with a resolution of 1 inch. Max section length of 12ft (8ft max option available)
- Additional fixture lengths are available please consult factory. All lengths are nominal
- VividTune available as standard product in 1ft resolution
- Actual sizes are one inch shorter than nominal to allow easy in-grid installation
- For Gypsum or Flangeless installations add 1 inch to overall fixture length (e.g. 4F1 for 48" length)
- Refer to ceiling type section of specification sheet and submittal drawings for actual sizes

### Corners and Transition Pieces

- Corners and other transition pieces are fully luminous
- Constructed using precision mitered frame and lens components
- The frame is welded to ensure a precise and robust assembly
- Standard 90° horizontal and vertical corners as well as custom corners are available
- [Consult corner and pattern addendum for additional information](#)
- Alternative transition pieces such as T's, Y's, X's, etc. are also available ☺

### Snap-In lensing Options

- Satin Flush - Flush, high diffusion glare-free lens
- Satin Drop - 1" Drop, high diffusion glare-free lens
- Asymmetric - Flush, low-glare Asymmetric lens
- Flush options ship with our patent-pending underlens solution, the proud lens ships with an injection molded end cap to eliminate light leak

### Reflectors

- Precision formed cold-rolled steel reflectors with high reflectivity
- Ultra high reflectivity used with High Performance light engine

### Lumen Maintenance

- 90% (L90) of initial light output at 100,000+ hrs
- 70% (L70) of initial light output at 400,000+ hrs
- Derived from TM-21 standard @25°C ambient and typical operating conditions

### Custom Lumen Output

- Custom lumen output expressed option in Lumens per foot (e.g. -725D for 725 Lms/ft down). Refer to additional detail on page 4.

### Electrical

- Dimming provided as standard
- Dimming wires capped with wire-nuts for non-dimming applications
- Optional battery backup options provided
- Default battery location is internal to fixture
- Default emergency section is 4ft in length and located at the beginning of the fixture unless designated elsewhere
- Estimated lumen output = battery wattage \* min efficacy (see performance table)
- Estimate lumen om the emergency section, multiply battery wattage x minimum fixture efficacy
- The EPC option will bypass local controls and dimming upon loss of normal power. This option is required when the fixture has both integrated sensors and emergency circuiting

### Integrated Sensors

- Please reference page 6 for details

### Weight

- 2.65 lbs per foot

### Approvals

- cULus - listed for damp locations
- RoHS compliant
- Meets NYC requirements
- Meets CCEC requirements
- IC Rated for insulation contact (except where noted)
- Tested to IESNA LM-79 and LM-80
- Can be used for State of California Title 24 high efficacy luminaire
- DesignLights Consortium® Qualified and classified for both DLC Standard and DLC Premium, refer to [www.designlights.org](http://www.designlights.org) for details

### Warranty

- Five year warranty standard.

## Shielding Options



S125DR with Flush  
Satin Lens (F)







S125DR with Drop  
Satin Lens (D)



S125DR with Flush  
Asymmetric Lens (A)

## Photometric Data

[View IES files](#)

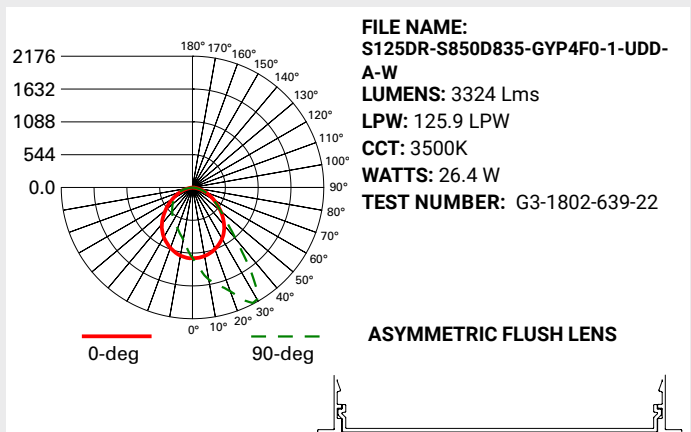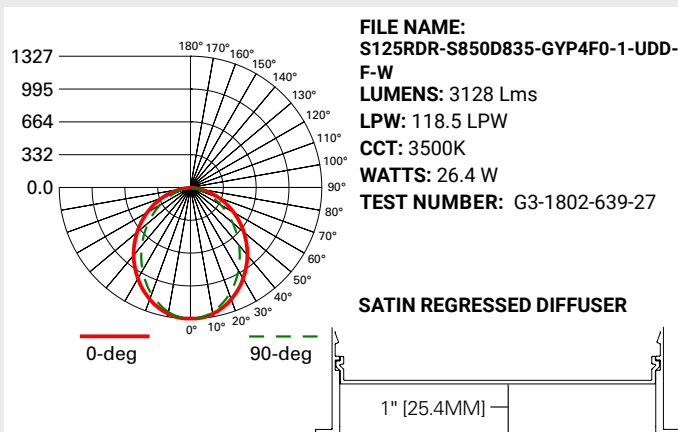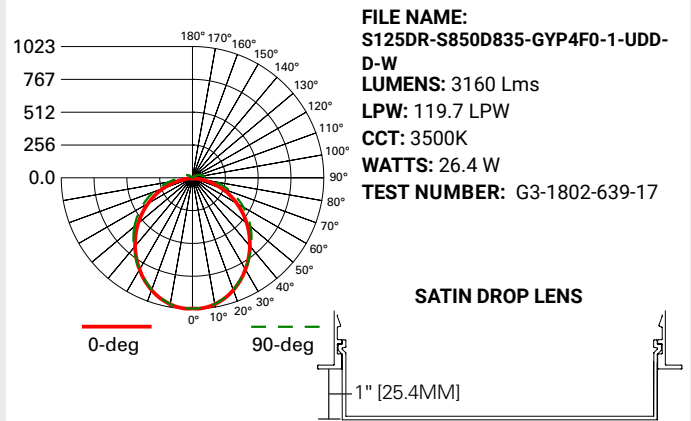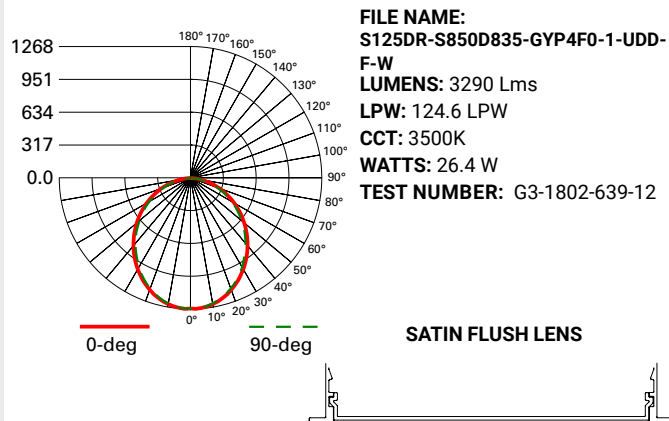

## Photometric Overview and Performance Data

### Performance Per Linear Foot at 3500K/80CRI

| Nominal Output | Standard and VividTune Light Engine |      | High Performance Light Engine |      |
|----------------|-------------------------------------|------|-------------------------------|------|
| lms/ft         | W/ft                                | lm/W | W/ft                          | lm/W |
| 375            | 3.0                                 | 124  | 2.9                           | 131  |
| 610            | 4.8                                 | 126  | 4.4                           | 138  |
| 850            | 6.8                                 | 124  | 6.1                           | 138  |
| 1090           | 8.9                                 | 121  | 8.1                           | 135  |
| 1270           | 10.6                                | 118  | 9.7                           | 131  |

### Lumen Adjustment Factors

| CCT   | 80CRI | 90CRI |
|-------|-------|-------|
| 2700K | N/A   | 0.801 |
| 3000K | 0.943 | 0.815 |
| 3500K | 1.000 | 0.861 |
| 4000K | 1.010 | 0.892 |

### LUMEN ADJUSTMENT CALCULATIONS

#### Example 1 - Adjusted Lumen Output

Nominal Lumen Output selected = 1025 lms/ft (based on standard of 3500K/80CRI)  
Lumen Adjustment Factor = 0.801 (2700K/90CRI desired)

Adjusted Lumen Output = Nominal Lumen Output x Lumen Adjustment Factor  
Adjusted Lumen Output = 1025 lms/ft x 0.801 = 821 lms/ft

#### Example 2 - Custom Lumen Output based on Required Lumens Per Foot

Total light output (4ft) requirement of 2800 lms, desired CCT and CRI of 4000K/80CRI

Total required lumens per foot @ 4000K = 2800 lms / 4 ft = 700 lms/ft  
Lumen Adjustment Factor = 1.018 (Requirement based on 4000K / 80CRI)

Total required lumens per foot @ 3500K / 80CRI = 700 lms/ft ÷ 1.018 = 688 lms/ft

Estimated efficacy = 121 lm/W (find nearest value using table above)

Estimated power consumption = 688 lms/ft ÷ 121 lm/W = 5.69 W/ft

### Custom Lumen Output

#### Total Light Output Range (lms/ft)

| CCT   | 80CRI    | 90CRI    |
|-------|----------|----------|
| 2700K | N/A      | 198-1113 |
| 3000K | 234-1310 | 202-1132 |
| 3500K | 248-1389 | 213-1196 |
| 4000K | 250-1403 | 221-1239 |

If your requirement is expressed in power consumption (W/ft) rather than light output, you can use the power to lumen output curves to convert power consumption to light output for specification.


Efficacy for custom lumen outputs can be estimated using lumen output curves or with the use of our online custom lumen output tool.

## Ceiling Type


Extruded Trim Flange Details - Refer to submittal drawings for detailed flange information - for additional options consult factory.

## Grid Ceiling Systems


15/16 Tee (ETG)

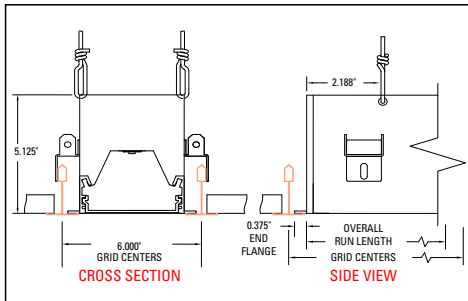


9/16 Tee (FTG)

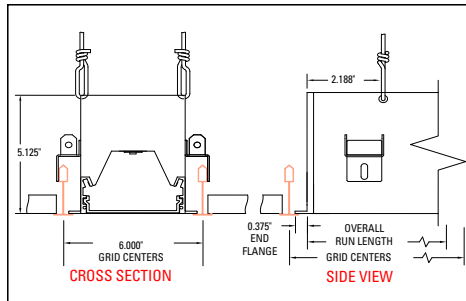


9/16 Slotted Tee (STG)

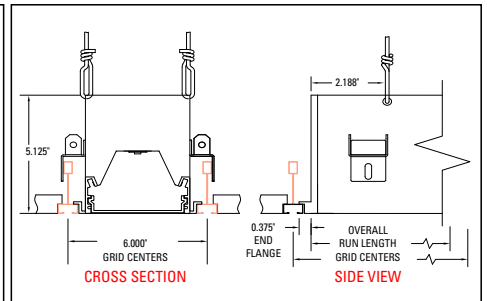


9/16 Tegular (FTT)

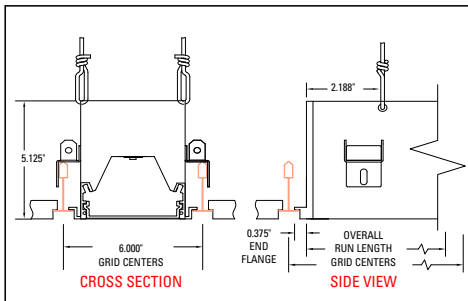

15/16 Tegular (ETT)

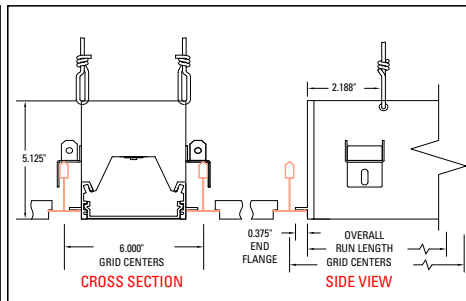


9/16 Interlude Tee (ITG)

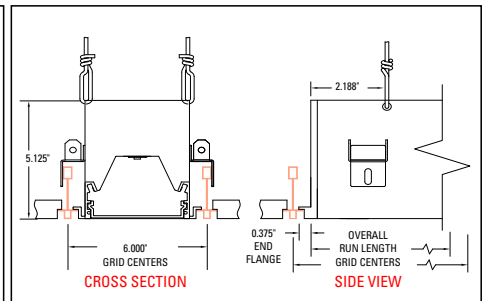


## Drywall Ceiling

Visible Flange (GYP)

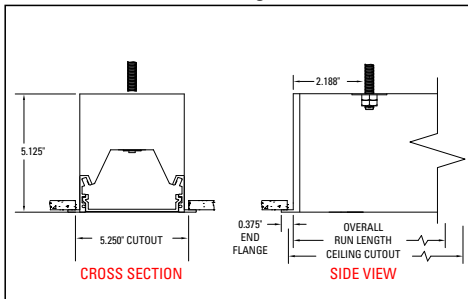


Mud-In Flange (FSR)

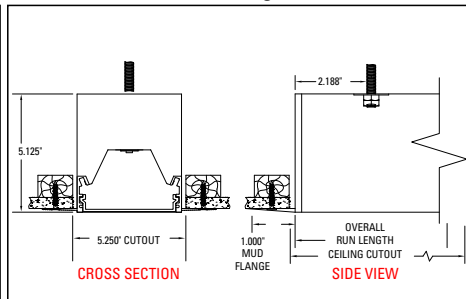


NOTE: ACTUAL LENGTH OF GYP/FSR FIXTURES WILL BE 1\"

## Other Ceiling Systems (Wood, Fabric, Metal Pan, Tech Style, HD Box Style)

Finished Extruded Side (FES)

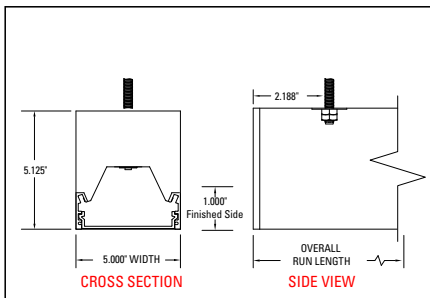

Typical Installations using Finished Extruded Side (FES)

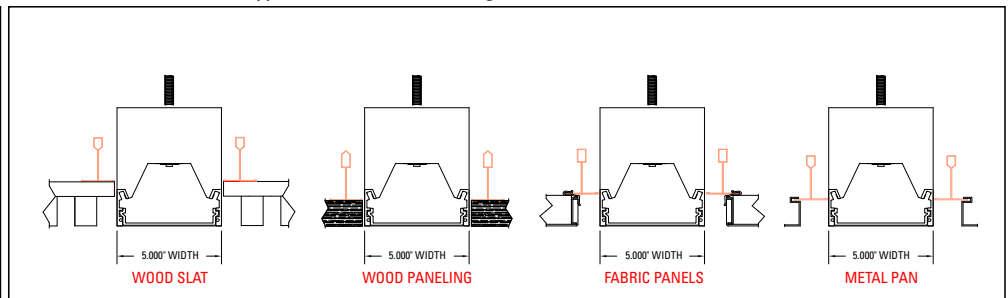

## Integrated Sensor Details and Placement

| Sensor Type       | Wireless | Sensor Integration       | Sensor Mounting                             | Ordering Code |
|-------------------|----------|--------------------------|---|---------------|
| WaveLinX Pro      | Yes      | Integral to Fixture      | Mounted in solid cover                      | WAA           |
|                   |          | Pre-wired for tile-mount | Installation in ceiling tile or J-Box cover | WTA           |
| WaveLinX Lite     | Yes      | Integral to Fixture      | Mounted in solid cover                      | WAB           |
|                   |          | Pre-wired for tile-mount | Installation in ceiling tile or J-Box cover | WTB           |
| Enlighted         | Yes      | Integral to Fixture      | Mounted in illuminated lens                 | LWIPD1        |
|                   |          | Pre-wired for tile-mount | Installation in ceiling tile or J-Box cover | LWTPD1        |
| Stand-Alone SVPD1 | No       | Integral to Fixture      | Mounted in solid cover                      | SVDPD1        |
|                   |          | Pre-wired for tile-mount | Installation in ceiling tile or J-Box cover | SVTPD1        |

Optional standalone and wireless connected integrated sensors require use of the DD (0-10V) driver. WaveLinX Pro and Enlighted sensors require additional system hardware (not provided) for full functionality. Tilemount sensor recommended for optimal sensor coverage on perimeter applications. Tilemount sensor not available with Chicago plenum option.

Standard sensor layout is shown below. Please refer to sensor coverage pattern diagrams to ensure proper coverage for the application. Standard configurations are available in both individual fixtures and in continuous runs. For optimal coverage, continuous runs will default to 8ft max section length.

For additional information integrated sensors and connected lighting, please visit [Cooper Lighting Solutions's Connected Lighting Website](#).

- ☐ Standard Sensor with Luminaire Control  
☒ Auxiliary Sensor used for Sensor Coverage (wireless systems only)

## INTEGRAL SENSOR

≤8ft Individual ☐

>8ft Individual ☐  ☒

Beginning of Run (BOR) ☐

Intermediate Section (INT) ☐

End of Run (EOR) ≤ 4ft  ☐

End of Run (EOR) > 4ft ☐  ☒

## TILEMOUNT SENSOR (OPTIMAL LOCATION)

Individual  ☐

Beginning of Run (BOR)  ☐


Intermediate Section (INT)  ☐

End of Run  ☐



## Define 5 LED Recessed with VividTune Tunable White

VividTune tunable white luminaires deliver high-quality light in a broad range of continuously variable color temperatures and intensities. Create a dynamic environment by adjusting the ambient light warmer or cooler to influence mood, support the task at hand, or create a dramatic ambience. The ability to control correlated color temperature and intensity separately using simple controls is the next evolution of LED lighting for the commercial, educational, healthcare and hospitality space. The unparalleled flexibility and number of available lighting environments enable users to find the right light with tunable white.

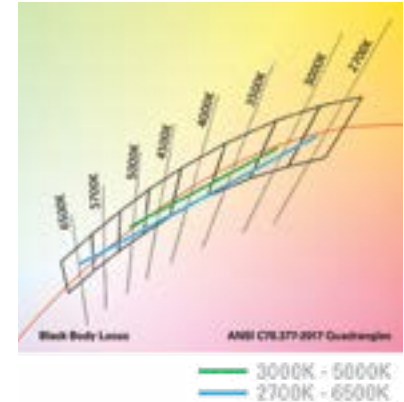


## Performance Data\*

| Tunable White - Lumen Adjustment Factors |             |        |             |        |
|--|-------------|--------|-------------|--------|
| CCT                                      | 3000K-5000K |        | 2700K-6500K |        |
|  | 80 CRI      | 90 CRI | 80 CRI      | 90 CRI |
| 2700K                                    | -           | -      | 0.868       | 0.741  |
| 3000K                                    | 0.894       | 0.736  | 0.893       | 0.771  |
| 3500K                                    | 0.946       | 0.804  | 0.924       | 0.809  |
| 4000K                                    | 0.993       | 0.868  | 0.944       | 0.835  |
| 4500K                                    | 1.002       | 0.883  | 0.961       | 0.857  |
| 5000K                                    | 1.002       | 0.883  | 0.974       | 0.874  |
| 6500K                                    | -           | -      | 0.988       | 0.897  |

| Example of Approximate Lumen Calculation |                            |                               |                               |
|--|----------------------------|-------------------------------|-------------------------------|
|  | Standard Catalog #         | VividTune 80 CRI Catalog #    | VividTune 90 CRI Catalog #    |
| CCT Setting                              | S125DR-C1090D835-X-UDD-F-W | S125DR-V1090D83050-X-UW2A-F-W | S125DR-V1090D93050-X-UW2A-F-W |
| 3000K                                    | -                          | 3898                          | 3209                          |
| 3500K                                    | 4360                       | 4125                          | 3505                          |
| 4000K                                    | -                          | 4329                          | 3784                          |
| 4500K                                    | -                          | 4369                          | 3850                          |
| 5000K                                    | -                          | 4369                          | 3850                          |

## Controlling VividTune Tunable White

VividTune luminaires make tunable white more accessible by using simple and familiar controls. From wall dimmers to wireless controls, VividTune tunable white luminaires are compatible with industry standard 0-10V dimming controls. A single 0-10V dimming input is used to control intensity (brightness) while a second 0-10V dimming input is used to adjust CCT. For suggested control configurations, go to [www.cooperlightingsolutions.com](http://www.cooperlightingsolutions.com) for tunable white application guides.

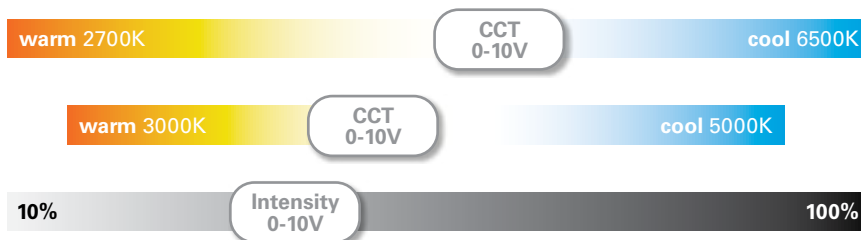

## Example of Lumen Adjustment Calculation

S125DR-V1090D83050-X-UW2A-F-W  
at 80 CRI tuned to 3500K

Adjusted Lumen =  
published lm x adjusted lm factor

Adjusted Lumen = 4360 x 0.946

Adjusted Lumen = 4125 lm

\* Lumen adjustment factors are for reference and may be different for each product selected. Refer to IES files for actual performance data on each.