


Lighting solutions

Wood pole top brackets

WRAP AROUND ADAPTERS

Catalog Number	Pole Diameter (Inches)	Figure
W1P710	7-10"	1
W2P710	7-10"	2
W3P710	7-10"	3
W4P710	7-10"	4


NOTES: If galvanized is desired, substitute "G" for "P". For pole sizes from 10" to 13" in diameter, substitute "1013" for "710".

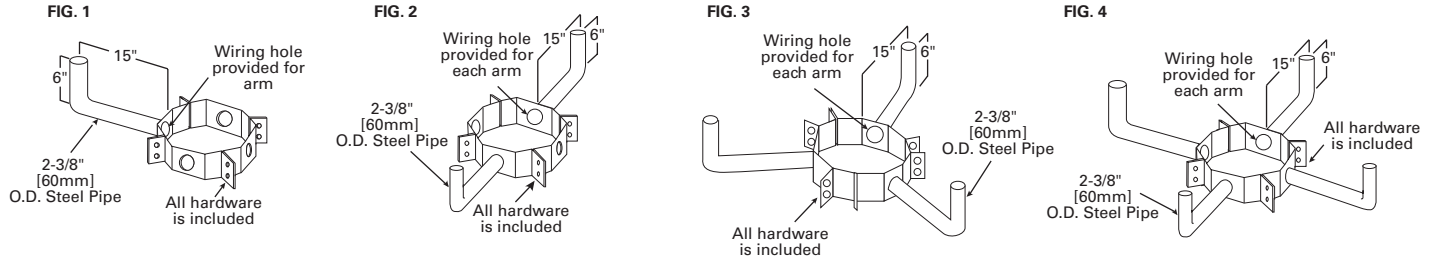

CROSS ARM STEEL BRACKET FOR WOOD POLES (Not for use with steel or aluminum. See notes)

Catalog Number	Pole Diameter (Inches)	Fixture Configuration	EPA	Figure
S2C2WP	1"	2 In-Line	0.9	1
S3C3WPM	3"	3 In-Line / Offset	3.6	2
S4C4WP	4"	4 In-Line	4.5	3
S5C5WP	5"	5 In-Line	5.5	4

NOTES: If galvanized is desired, substitute "G" for "P". Mounting hardware not included. Fixture mounting holes are 30" on center. Modified versions are available for steel or aluminum pole applications. Consult your lighting representative at Cooper Lighting Solutions or visit www.cooperlighting.com.

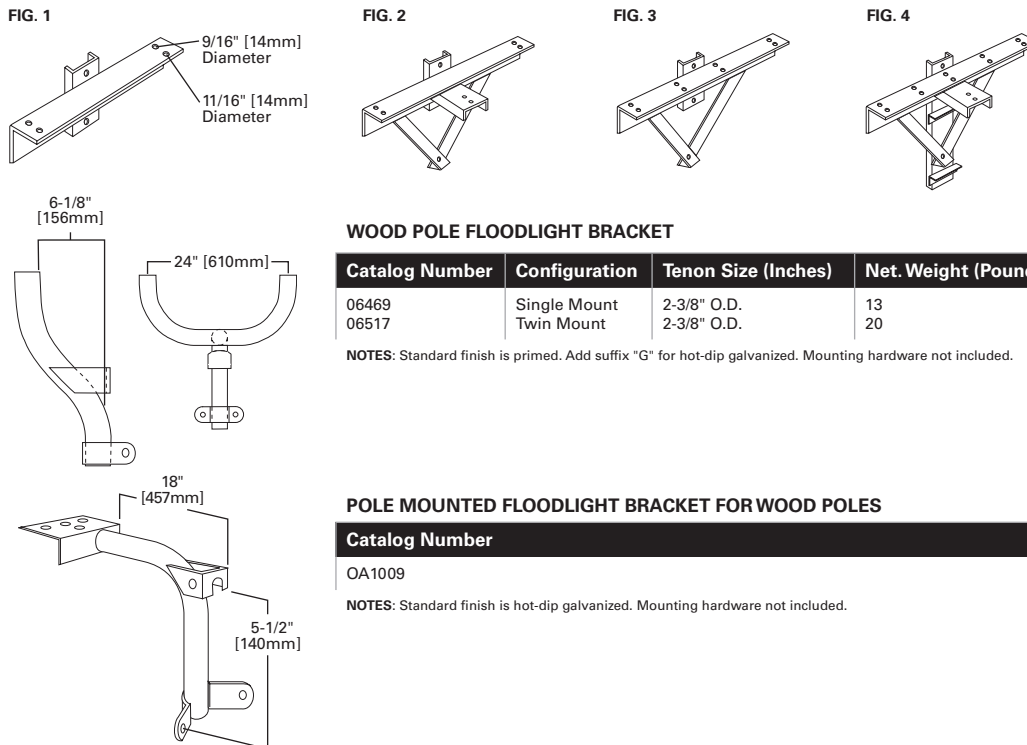

WOOD POLE FLOODLIGHT BRACKET

Catalog Number	Configuration	Tenon Size (Inches)	Net. Weight (Pounds)
06469	Single Mount	2-3/8" O.D.	13
06517	Twin Mount	2-3/8" O.D.	20

NOTES: Standard finish is primed. Add suffix "G" for hot-dip galvanized. Mounting hardware not included.

POLE MOUNTED FLOODLIGHT BRACKET FOR WOOD POLES

Catalog Number
OA1009

NOTES: Standard finish is hot-dip galvanized. Mounting hardware not included.

WARNING: Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to pole white paper WP513001EN for additional support information. Before installing, make sure proper anchor bolts and templates are obtained. The use of unauthorized accessories such as banners, signs, cameras or pennants for which the pole was not designed voids the pole warranty and may result in pole failure causing serious injury or property damage. Information regarding total loading capacity can be supplied upon request. The pole warranty is void unless poles are used and installed as a complete pole and luminaire combination. This warranty specifically excludes failure as the result of a third party act or omission, misuse, unanticipated uses, fatigue failure or similar phenomena resulting from induced vibration, harmonic oscillation or resonance associated with movement of air currents around the product.

Specifications and dimensions subject to change without notice. Consult your lighting representative at Cooper Lighting Solutions or visit www.cooperlighting.com for available options, accessories and ordering information



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. TD513020EN
May 10, 2017 8:11 AM

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.